

PUB. 193
SAILING DIRECTIONS
(ENROUTE)



SKAGERRAK AND KATTEGAT



Prepared and published by the
NATIONAL GEOSPATIAL-INTELLIGENCE AGENCY
Springfield, Virginia

© COPYRIGHT 2020 BY THE UNITED STATES GOVERNMENT
NO COPYRIGHT CLAIMED UNDER TITLE 17 U.S.C.

2020



SEVENTEENTH EDITION

Preface

Pub. 193, Sailing Directions (Enroute) Skagerrak and Kattegat, Seventeenth Edition, 2020, is issued for use in conjunction with Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas. Companion volumes are Pubs. 191, 192, 194, and 195.

Digital Nautical Charts 21 and 22 provide electronic chart coverage for the area covered by this publication.

This publication has been corrected to 15 August 2020, including Notice to Mariners No. 33 of 2020. Subsequent updates have corrected this publication to 29 April 2023 including Notice to Mariners No. 17 of 2023.

Explanatory Remarks

Sailing Directions are published by the National Geospatial-Intelligence Agency (NGA) under the authority of Department of Defense Directive 5105.60, dated 29 July 2009, and pursuant to the authority contained in U. S. Code Title 10, Chapter 22, Section 451 and Title 44, Section 1336. Sailing Directions, covering the harbors, coasts, and waters of the world, provide information that cannot be shown graphically on nautical charts and is not readily available elsewhere.

Sailing Directions (Enroute) include detailed coastal and port approach information which supplements the largest scale chart produced by the National Geospatial-Intelligence Agency. This publication is divided into geographic areas called “Sectors.”

Bearings.—Bearings are true, and are expressed in degrees from 000° (north) to 360°, measured clockwise. General bearings are expressed by the initial letters of the points of the compass (e.g. N, NNE, NE, etc.). Adjective and adverb endings have been discarded. Wherever precise bearings are intended, degrees are used.

Charts.—Reference to charts made throughout this publication refer to both the paper chart and the Digital Nautical Chart (DNC).

Corrective Information.—Users should refer corrections, additions, and comments to NGA’s Maritime Operations Desk, as follows:

NGA Maritime—Contact Information	
Maritime Operations Desk	
Toll free	1-800-362-6289
Commercial	571-557-5455
DSN	547-5455
E-mail	navsafety@nga.mil
Maritime Safety Office	
DNC web site	https://dnc.nga.mil

NGA Maritime—Contact Information	
Maritime Domain web site	https://msi.nga.mil
E-mail	MarHelp@nga.mil
Maritime Quality Feedback System (MQFS)	https://marhelp.nga.mil
Mailing address	Maritime Safety Office National Geospatial-Intelligence Agency Mail Stop N64-SFH 7500 Geoint Drive Springfield VA 22150-7500

New editions of Sailing Directions are corrected through the date of publication shown above. Important information to amend material in the publication is available as updated as needed and available as a downloadable corrected publication from the NGA Maritime Domain web site.

NGA Maritime Safety Office Web Site
https://msi.nga.mil

Courses.—Courses are true, and are expressed in the same manner as bearings. The directives “steer” and “make good” a course mean, without exception, to proceed from a point of origin along a track having the identical meridional angle as the designated course. Vessels following the directives must allow for every influence tending to cause deviation from such track, and navigate so that the designated course is continuously being made good.

Currents.—Current directions are the true directions toward which currents set.

Distances.—Distances are expressed in nautical miles of 1 minute of latitude. Distances of less than 1 mile are expressed in meters, or tenths of miles.

Geographic Names.—Geographic names are generally those used by the nation having sovereignty. Names in parentheses following another name are alternate names that may appear on some charts. In general, alternate names are quoted only in the principal description of the place. Diacritical marks, such as accents, cedillas, and circumflexes, which are related to specific letters in certain foreign languages, are not used in the interest of typographical simplicity.

Wherever possible, names used on NGA charts and in NGA publications are in the form approved by the United States Board on Geographic Names (BGN). Generally, local official spellings are used for those features entirely within a single sovereignty, names of countries and those features which are common to two or more countries or which lie beyond a single sovereignty may carry Board-approved conventional spellings

(i.e., names in common English language usage). When alternate names would be of value to the user, they may be shown for information purposes within parentheses. Important individual name changes are made to all revised charts as the opportunity permits.

Geographic names or their spellings do not necessarily reflect recognition of the political status of an area by the United States Government.

BGN approved names may be found at <https://geonames.nga.mil/geonames/GNSHome/welcome.html>.

Heights.—Heights are referred to the plane of reference used for that purpose on the charts and are expressed in meters.

Internet Links.—This publication provides Internet links to web sites concerned with maritime navigational safety, including but not limited to, Federal government sites, foreign Hydrographic Offices, and foreign public/private port facilities. NGA makes no claims, promises, or guarantees concerning the accuracy, completeness, or adequacy of the contents of these web sites and expressly disclaims any liability for errors and omissions in the contents of these web sites.

International Ship and Port Facility Security (ISPS) Code.—The ISPS Code is a comprehensive set of measures to enhance the security of ships and port facilities developed in response to the perceived threats to ships and port facilities in the wake of the 9/11 attacks in the United States. Information on the ISPS Code can be found at the International Maritime Organization web site:

International Maritime Organization Home Page
http://www.imo.org

Lights and Fog Signals.—Lights and fog signals are not described, and light sectors are not usually defined. The Light Lists should be consulted for complete information.

National Ocean Claims.—Information on national ocean claims and maritime boundary disputes, which have been compiled from the best available sources, is provided solely in the interest of the navigational safety of shipping and in no way constitutes legal recognition by the United States. These non-recognized claims and requirements may include, but are not limited to:

1. A requirement by a state for advance permission or notification for innocent passage of warships in the territorial sea.
2. Straight baseline, internal waters, or historic waters claims.
3. The establishment of a security zone, where a state claims to control activity beyond its territorial sea for security reasons unrelated to that state's police powers in its territory, including its territorial sea.

Radio Navigational Aids.—Radio navigational aids and radio weather services are not described in detail. Publication No. 117 Radio Navigational Aids and NOAA Publication, Selected Worldwide Marine Weather Broadcasts, should be consulted.

Soundings.—Soundings are referred to the datum of the charts and are expressed in meters.

Telephone and Facsimile Numbers.—Within this publication, the international telephone and facsimile numbers provided as contact information contain the minimum digits necessary to dial. Please note that these contact numbers do not include additional digits or special characters, such as (0) or (+), which may be required when dialing. The necessity of such digits and characters depend upon numerous factors and conditions, such as the user's geolocation and service provider. Mariners are advised to consult their communications equipment and service provider user manuals for guidance.

Time.—Time is normally expressed as local time unless specifically designated as Universal Coordinated Time (UTC).

Time Zone.—The Time Zone description(s), as well as information concerning the use of Daylight Savings Time, are included. The World Time Zone Chart is available on the Internet at the web site given below.

Standard Time Zone of the World Chart
https://www.cia.gov/maps/the-world-factbook/world-regional

U.S. Maritime Advisory System.—The U.S. Maritime Advisory System is a streamlined inter-agency approach to identifying and promulgating maritime security threats. The system replaces Special Warnings to Mariners (State Department), MARAD Advisories (Maritime Administration), and Marine Safety Information Bulletins (U.S. Coast Guard) and consists of the following items:

1. U.S. Maritime Alert—Provides basic information (location, incident, type, date/time) on reported maritime security threats to U.S. maritime industry interests. U.S. Maritime alerts do not contain policy or recommendations for specific courses of information.
2. U.S. Maritime Advisory—Provides more detailed information, when appropriate, through a “whole-of-government” response to an identified maritime threat.

Maritime Administration (MARAD)—U.S. Maritime Advisory System
https://www.maritime.dot.gov/msci-advisories

Winds.—Wind directions are the true directions from which winds blow.

Reference List

The principal sources examined in the preparation of this publication were:

- British Hydrographic Department Sailing Directions.
- Danish Sailing Directions.
- Norwegian Sailing Directions.
- Swedish Sailing Directions
- Various port handbooks.
- Reports from United States Naval and merchant vessels and various shipping companies.
- Other U.S. Government publications, reports, and documents.

IV

Charts, light lists, tide and current tables, and other documents in possession of the Agency.

Internet web sites as, follows:

1. Carter, Donald and Diana (Internet Public Library)
<http://www.ipl.org/exhibit/light>
2. Frederikshavn, Denmark

3. Moss Maritime
<https://www.frederikshavn.dk>
<http://www.mosswv.com>
4. Varberg, Sweden
<http://www.varberg.se>

Date of Change: 29 April 2023	
Notice to Mariners: 17/2023	
Sector	Paragraphs
Sector 2	Paragraph 2.7
Sector 3	Paragraphs 3.2 and 3.14
Sector 4	Paragraphs 4.24 and 4.27
Sector 5	Paragraph 5.1
Sector 6	Paragraphs 6.8 and 6.22
Sector 7	Paragraphs 7.3, 7.6, 7.9, and 7.12
Sector 8	Paragraphs 8.5, 8.10, 8.25, and 8.26

Date of Change: 31 December 2022	
Notice to Mariners: 53/2022	
Sector	Paragraphs
Sector 1	Paragraph 1.21
Sector 2	Paragraphs 2.3 and 2.13
Sector 3	Paragraph 3.2
Sector 4	Paragraphs 4.15, 4.17, 4.24, and 4.27
Sector 5	Paragraphs 5.5, 5.13, 5.21, 5.22, and 5.23
Sector 7	Paragraphs 7.3, 7.6, 7.9, and 7.19
Sector 8	Paragraphs 8.3, 8.9, 8.10, 8.19, and 8.26


Date of Change: 8 October 2022	
Notice to Mariners: 41/2022	
Sector	Paragraphs
Sector 1	Paragraphs 1.7 and 1.19
Sector 2	Paragraphs 2.3, 2.7, 2.10, and 2.13
Sector 3	Paragraphs 3.2, 3.6, 3.7, and 3.15
Sector 4	Paragraphs 4.7, 4.12, 4.13, 4.14, 4.15, 4.17, 4.18, and 4.27
Sector 5	Paragraphs 5.5, 5.13, 5.15, 5.21, and 5.23
Sector 6	Paragraphs 6.7, 6.11, 6.19, and 6.22
Sector 7	Paragraphs 7.3, 7.6, and 7.9
Sector 8	Paragraphs 8.3, 8.5, 8.8, 8.9, 8.19, 8.26, and 8.39

Date of Change: 21 May 2022	
Notice to Mariners: 21/2022	
Sector	Paragraphs
Sector 1	Paragraphs 1.7, 1.13, 1.19, and 1.21
Sector 2	Paragraphs 2.3 and 2.7
Sector 3	Paragraphs 3.2, 3.12, 3.14, and 3.18
Sector 4	Paragraphs 4.12, 4.13, 4.14, 4.17, 4.18, 4.21, 4.24, 4.27, 4.29, and 4.37
Sector 5	Paragraphs 5.5, 5.11, 5.13, 5.15, 5.21, 5.22, and 5.23
Sector 6	Paragraphs 6.11, 6.19, 6.22, and 6.24
Sector 7	Paragraphs 7.9, 7.19, 7.22, and 7.23
Sector 8	Paragraphs 8.5, 8.9, 8.10, 8.13, 8.16, 8.19, 8.23, 8.25, 8.26, 8.33, and 8.36

Date of Change: 25 September 2021	
Notice to Mariners: 39/2021	
Sector	Paragraphs
Sector 1	Paragraphs 1.1, 1.13, and 1.19
Sector 2	Paragraph 2.3
Sector 3	Paragraphs 3.2, 3.6, 3.7, 3.12, 3.14, and 3.15
Sector 4	Paragraphs 4.1, 4.18, 4.27, 4.29, and 4.37
Sector 5	Paragraphs 5.5, 5.13, 5.15, 5.16, 5.20, 5.21, and 5.22
Sector 6	Paragraphs 6.11, 6.19, and 6.24
Sector 7	Paragraphs 7.3, 7.5, 7.6, 7.22, 7.24, and 7.25
Sector 8	Paragraphs 8.3, 8.5, 8.16, 8.19, 8.25, and 8.26

Date of Change: 3 April 2021	
Notice to Mariners: 14/2021	
Sector	Paragraphs
Sector 1	Paragraphs 1.9 and 1.13
Sector 2	Paragraph 2.3
Sector 3	Paragraphs 3.7, 3.8, and 3.15
Sector 4	Paragraphs 4.12, 4.18, and 4.27
Sector 5	Paragraphs 5.1, 5.5, 5.13, 5.15, and 5.17
Sector 6	Paragraphs 6.11 and 6.22
Sector 7	Paragraphs 7.1 and 7.24
Sector 8	Paragraphs 8.10, 8.16, and 8.26

Date of Change: 5 December 2020	
Notice to Mariners: 49/2020	
Sector	Paragraphs
Sector 5	Paragraphs 5.5, 5.7, 5.13, and 5.15
Sector 6	Paragraphs 6.11 and 6.22
Sector 7	Paragraphs 7.1, 7.7, and 7.8
Sector 8	Paragraphs 8.3, 8.5, 8.26, and 8.32

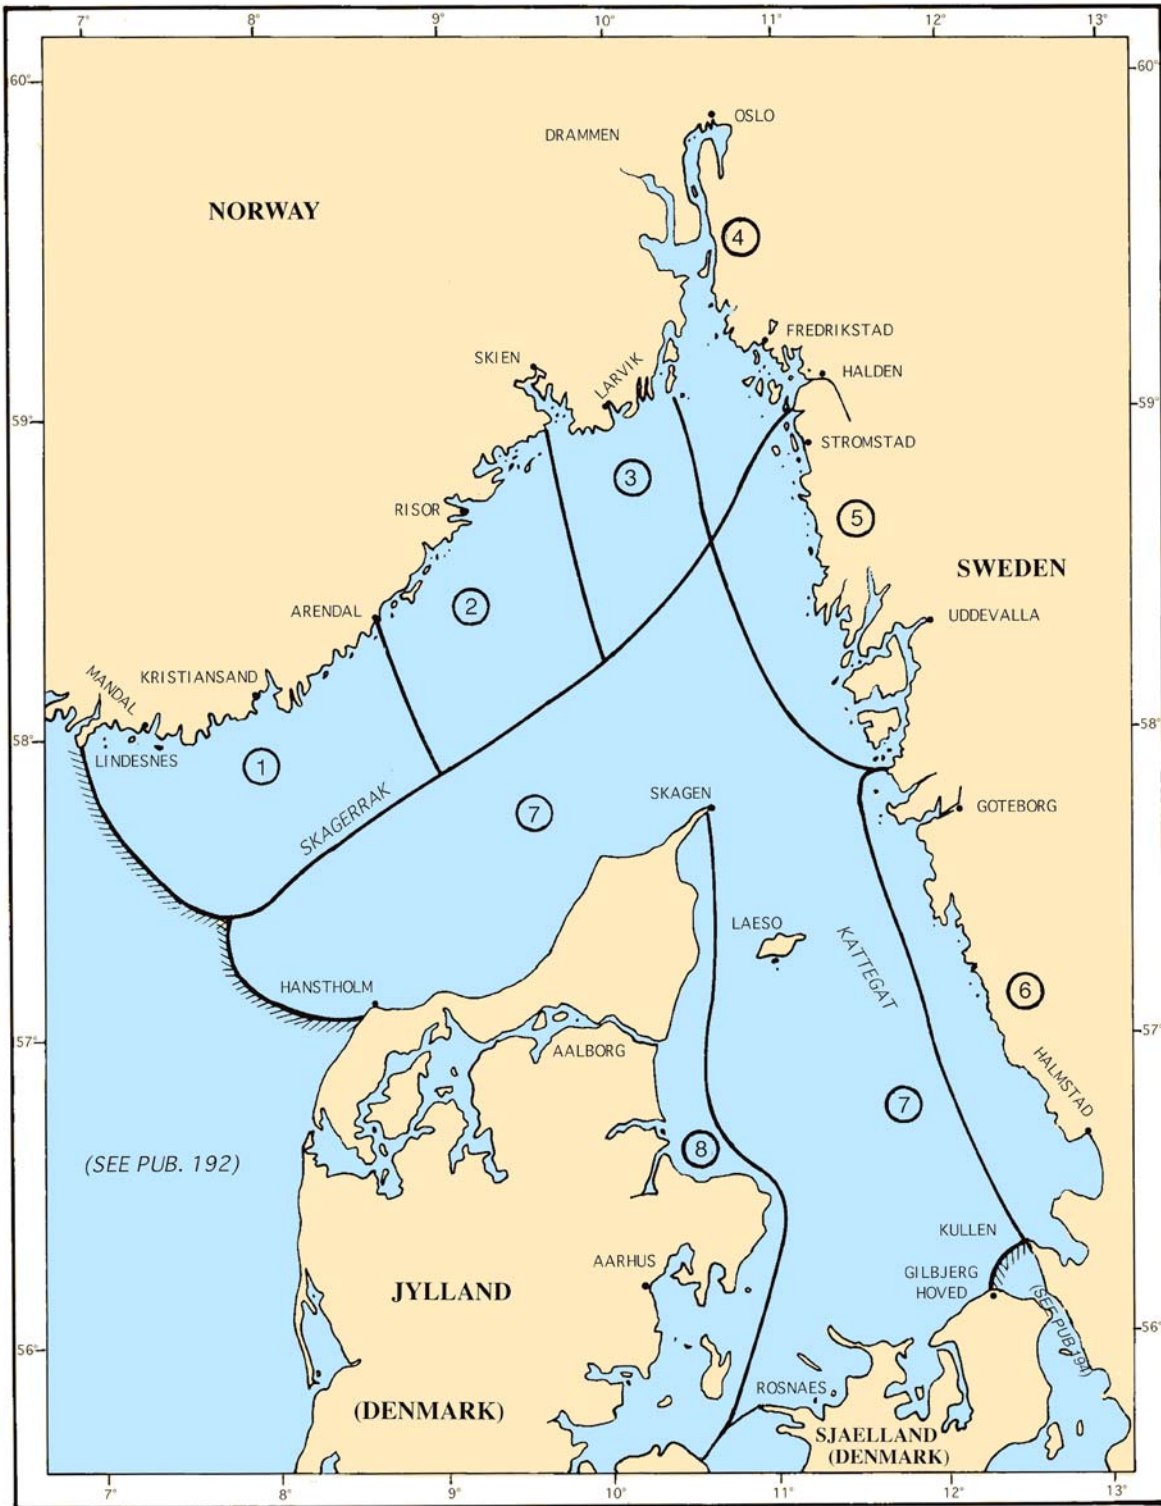

SECTOR LIMITS — PUB. 193

Conversion Tables

Feet to Meters

Feet	0	1	2	3	4	5	6	7	8	9
0	0.00	0.30	0.61	0.91	1.22	1.52	1.83	2.13	2.44	2.74
10	3.05	3.35	3.66	3.96	4.27	4.57	4.88	5.18	5.49	5.79
20	6.10	6.40	6.71	7.01	7.32	7.62	7.92	8.23	8.53	8.84
30	9.14	9.45	9.75	10.06	10.36	10.67	10.97	11.28	11.58	11.89
40	12.19	12.50	12.80	13.11	13.41	13.72	14.02	14.33	14.63	14.93
50	15.24	15.54	15.85	16.15	16.46	16.76	17.07	17.37	17.68	17.98
60	18.29	18.59	18.90	19.20	19.51	19.81	20.12	20.42	20.73	21.03
70	21.34	21.64	21.95	22.25	22.55	22.86	23.16	23.47	23.77	24.08
80	24.38	24.69	24.99	25.30	25.60	25.91	26.21	26.52	26.82	27.13
90	27.43	27.74	28.04	28.35	28.65	28.96	29.26	29.57	29.87	30.17

Fathoms to Meters

Fathoms	0	1	2	3	4	5	6	7	8	9
0	0.00	1.83	3.66	5.49	7.32	9.14	10.97	12.80	14.63	16.46
10	18.29	20.12	21.95	23.77	25.60	27.43	29.26	31.09	32.92	34.75
20	36.58	38.40	40.23	42.06	43.89	45.72	47.55	49.38	51.21	53.03
30	54.86	56.69	58.52	60.35	62.18	64.01	65.84	67.67	69.49	71.32
40	73.15	74.98	76.81	78.64	80.47	82.30	84.12	85.95	87.78	89.61
50	91.44	93.27	95.10	96.93	98.75	100.58	102.41	104.24	106.07	107.90
60	109.73	111.56	113.39	115.21	117.04	118.87	120.70	122.53	124.36	126.19
70	128.02	129.85	131.67	133.50	135.33	137.16	138.99	140.82	142.65	144.47
80	146.30	148.13	149.96	151.79	153.62	155.45	157.28	159.11	160.93	162.76
90	164.59	166.42	168.25	170.08	171.91	173.74	175.56	177.39	179.22	181.05

Meters to Feet

Meters	0	1	2	3	4	5	6	7	8	9
0	0.00	3.28	6.56	9.84	13.12	16.40	19.68	22.97	26.25	29.53
10	32.81	36.09	39.37	42.65	45.93	49.21	52.49	55.77	59.06	62.34
20	65.62	68.90	72.18	75.46	78.74	82.02	85.30	88.58	91.86	95.14
30	98.42	101.71	104.99	108.27	111.55	114.83	118.11	121.39	124.67	127.95
40	131.23	134.51	137.80	141.08	144.36	147.64	150.92	154.20	157.48	160.76
50	164.04	167.32	170.60	173.88	177.16	180.45	183.73	187.01	190.29	193.57
60	196.85	200.13	203.41	206.69	209.97	213.25	216.54	219.82	223.10	226.38
70	229.66	232.94	236.22	239.50	242.78	246.06	249.34	252.62	255.90	259.19
80	262.47	265.75	269.03	272.31	275.59	278.87	282.15	285.43	288.71	291.99
90	295.28	298.56	301.84	305.12	308.40	311.68	314.96	318.24	321.52	324.80

Meters to Fathoms

Meters	0	1	2	3	4	5	6	7	8	9
0	0.00	0.55	1.09	1.64	2.19	2.73	3.28	3.83	4.37	4.92
10	5.47	6.01	6.56	7.11	7.66	8.20	8.75	9.30	9.84	10.39
20	10.94	11.48	12.03	12.58	13.12	13.67	14.22	14.76	15.31	15.86
30	16.40	16.95	17.50	18.04	18.59	19.14	19.68	20.23	20.78	21.33
40	21.87	22.42	22.97	23.51	24.06	24.61	25.15	25.70	26.25	26.79
50	27.34	27.89	28.43	28.98	29.53	30.07	30.62	31.17	31.71	32.26
60	32.81	33.36	33.90	34.45	35.00	35.54	36.09	36.64	37.18	37.73
70	38.28	38.82	39.37	39.92	40.46	41.01	41.56	42.10	42.65	43.20
80	43.74	44.29	44.84	45.38	45.93	46.48	47.03	47.57	48.12	48.67
90	49.21	49.76	50.31	50.85	51.40	51.95	52.49	53.04	53.59	54.13

Abbreviations

The following abbreviations may be used in the text:

Units

°C	degree(s) Centigrade	km	kilometer(s)
cm	centimeter(s)	m	meter(s)
cu.m.	cubic meter(s)	mb	millibars
dwt	deadweight tons	MHz	megahertz
FEU	forty-foot equivalent units	mm	millimeter(s)
gt	gross tons	nrt	net registered tons
kHz	kilohertz	TEU	twenty-foot equivalent units

Directions

N	north	S	south
NNE	northnortheast	SSW	southsouthwest
NE	northeast	SW	southwest
ENE	eastnortheast	WSW	westsouthwest
E	east	W	west
ESE	eastsoutheast	WNW	westnorthwest
SE	southeast	NW	northwest
SSE	southsoutheast	NNW	northnorthwest

Vessel types

LASH	Lighter Aboard Ship	Ro-ro	Roll-on Roll-off
LNG	Liquified Natural Gas	ULCC	Ultra Large Crude Carrier
LPG	Liquified Petroleum Gas	VLCC	Very Large Crude Carrier
OBO	Ore/Bulk/Oil	VLOC	Very Large Ore Carrier
Lo-lo	Lift-on Lift-off	FSO	Floating Storage and Offloading
NGL	Natural Gas Liquids	FSU	Floating Storage Unit
FSRU	Floating Storage and Regasification Unit	FPSO	Floating Production Storage and Offloading

Time

ETA	estimated time of arrival	GMT	Greenwich Mean Time
ETD	estimated time of departure	UTC	Coordinated Universal Time

Water level

MSL	mean sea level	LWS	low water springs
HW	high water	MHWN	mean high water neaps
LW	low water	MHWS	mean high water springs
MHW	mean high water	MLWN	mean low water neaps
MLW	mean low water	MLWS	mean low water springs
HWN	high water neaps	HAT	highest astronomical tide
HWS	high water springs	LAT	lowest astronomical tide
LWN	low water neaps		

Communications

D/F	direction finder	MF	medium frequency
R/T	radiotelephone	HF	high frequency
GMDSS	Global Maritime Distress and Safety System	VHF	very high frequency
LF	low frequency	UHF	ultra high frequency

Navigation

LANBY	Large Automatic Navigation Buoy	SBM	Single Buoy Mooring
NAVSAT	Navigation Satellite	SPM	Single Point Mooring
ODAS	Ocean Data Acquisition System	TSS	Traffic Separation Scheme
CBM	Conventional Buoy Mooring System	VTC	Vessel Traffic Center
MBM	Multi-Buoy Mooring System	VTS	Vessel Traffic Service

The following abbreviations may be used in the text:

CALM Catenary Anchor Leg Mooring

Miscellaneous

AIS Automatic Identification System

COLREGS Collision Regulations

IALA International Association of Lighthouse
 Authorities

IHO International Hydrographic Organization

IMO International Maritime Organization

IMDG International Maritime Dangerous Goods Code

LOA length overall

UKC Under keel clearance

MMSI Maritime Mobile Service Identity
 Code

No./Nos. Number/Numbers

PA Position approximate

PD Position doubtful

Pub. Publication


SOLAS International Convention for
 Safety of Life at Sea

St./Ste. Saint/Sainte

ISPS International Ship and Port facility
 Security

Contents

Preface.....	II
Chartlet—Sector Limits	VII
Conversion Tables.....	VIII
Abbreviations	IX
Sector 1	
Sector 1—Norway—Southeast Coast—Lindesnes to Arendal	1
Sector 2	
Sector 2—Norway—Southeast Coast—Arendal to Langesundsfjorden	19
Sector 3	
Sector 3—Norway—Southeast Coast—Langesundsfjorden to Tonsbergfjorden	31
Sector 4	
Sector 4—Norway—Southeast Coast—Oslofjorden	47
Sector 5	
Sector 5—Sweden—West Coast—Sekken to Marstrandsfjorden	77
Sector 6	
Sector 6—Sweden—West Coast—Marstrandsfjorden to Kullen	103
Sector 7	
Sector 7—Denmark—The Skagerrak—South Side, the Kattegat, and Sjaelland—North Coast	127
Sector 8	
Sector 8—Denmark—East Coast—Skagen to Bjornsknude	147
Glossaries	187
Index—Gazetteer	195

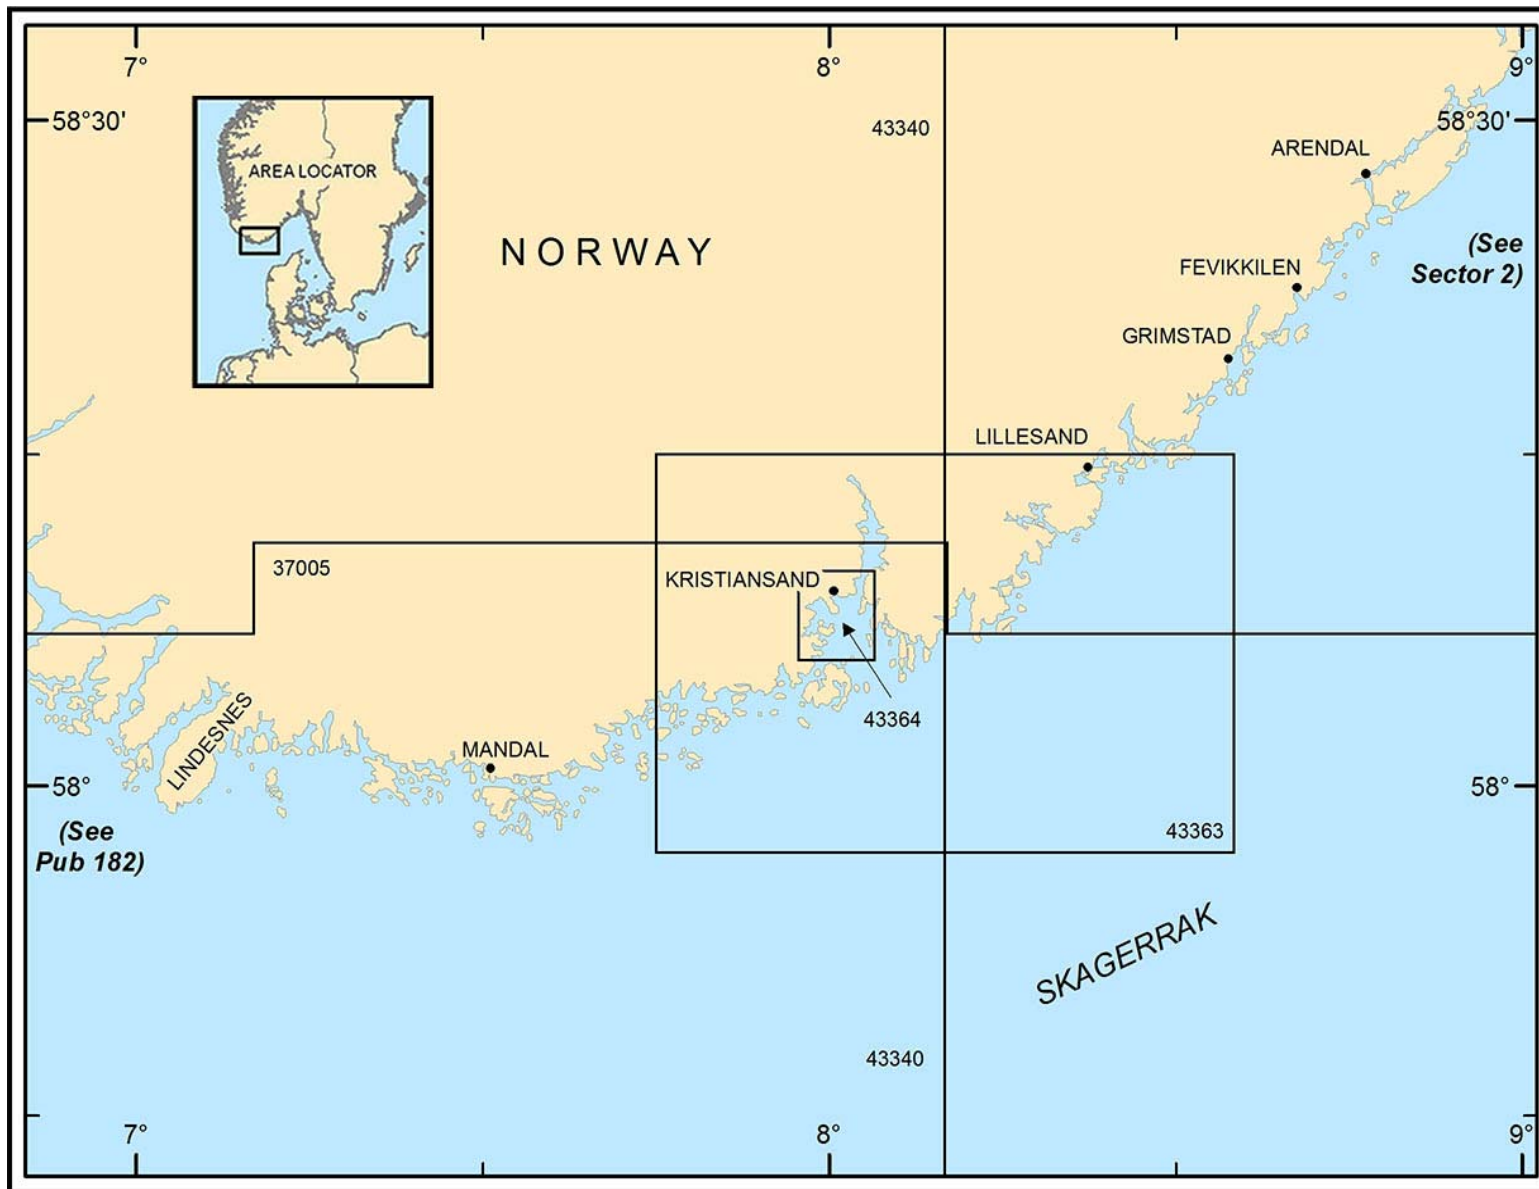

Additional chart coverage may be found in NGA/DLIS Catalog of Maps, Charts, and Related Products (Unlimited Distribution).

SECTOR 1 — CHART INFORMATION

SECTOR 1

NORWAY—SOUTHEAST COAST—LINDESNES TO ARENDAL

Plan.—This sector describes the SE coast of Norway between Lindesnes and the approaches to Arendal, about 60 miles NE. The descriptive sequence is SW to NE.

General Remarks

1.1 The SE coast of Norway, between Lindesnes and Arendal, has the same general features throughout. The coastline is quite irregular and much-indented; the hinterland is low-lying and generally featureless; and a multitude of off-lying dangers, some awash, extend up to about 5 miles seaward of the shore.

Natural landmarks and distinguishing features are few. Those more easily observed by vessels navigating off the coast include the peaks near Lindesnes (57°59'N., 7°03'E.); the light color of Songvar Island (58°01'N., 7°49'E.), the inland elevated ridge of Kristiansands Høy Land (58°20'N., 7°46'E.); Hombersundsfald (58°28'N., 8°31'E.), a steep plateau; and Grimstadsalen (58°21'N., 8°31'E.), a wooded peak.

An inner passage, available to small vessels with local knowledge, leads between the mainland coast and the archipelago of off-lying islands and islets, which is known as Skjaergarden. The passage is generally quite deep and well sheltered, but the channels are often narrow and rather open to the effects of the sea, particularly in the area E of Lindesnes.

Navigation off the Norwegian coast is difficult and requires great caution. During the summer months, the long daylight hours and short duration of darkness provide a visual advantage to navigation in the region. In winter however, when the nights are proportionately long, with the weather mostly stormy and cloudy. Snowstorms often obscure the landmarks.

The coast is high and bold, with the exception of Lindesnes, and it is difficult to pick out natural landmarks. The landmarks mentioned in this sector are mostly conspicuous only from a particular direction and distance. They are somewhat difficult to identify by vessels without local knowledge. With the exception of Udvar (57°59'N., 7°13'E.), the islands of Skjaergarden tend to blend in with the background.

Ice.—Along the S coast of Norway, freezing starts earlier and with greater severity with increasing longitude. In January and February, ice normally forms in the inner leads, fjords, and several harbors located along the coastal stretch between Kristiansand (58°09'N., 8°00'E.) and the Swedish border (59°00'N., 11°05'E.). This creates regular problems for the fishing fleet and smaller vessels. Some harbors located to the E of Jomfruland (58°51'N., 9°36'E.), including Oslofjorden, become dependent on local ice-breaker service for shipping. Except during a severe winter, harbors in the vicinity of Lindesnes (57°59'N., 7°03'E.) are seldom ice-bound. Most harbors lying W of Jomfruland are ice free.

In some winters, the shipping route leading along the S coast of Norway is hindered by drift ice. In addition, ice from the Kattegat drifts N with the current and adds to the problems of ice off the coasts of both Sweden and Norway. Such drift ice generally appears near the beginning of the year; however, it

seldom appears before Christmas.

Ice is present in the entrance to Oslofjorden as late as April and is common in March. The dates are difficult to predict as it is dependent on the state of ice in the Baltic; however, this ice is seldom a hindrance to navigation after February.

The inner channel leading to Uddevalla (58°21'N., 11°55'E.) is normally covered with frozen ice during February and March.

The formation of ice is influenced by winds from the NE or E and its break-up and dispersal is caused by winds from the S or SW. Ice formation along the W coast of Sweden is unpredictable and treacherous due to the greater salinity of the Skagerrak compared with the low salinity of water flowing out of the Baltic Sea and local rivers.

The most critical months for ice formation are February and March as the sea is then at its coldest. Ice does not form during normal and mild winters along the W coast of Sweden. However, some ice will normally form in late January and persist until about mid-March. During severe winters ice may develop in late January and persist into late April. In the worst case the Kattegat and the E end of the Skagerrak may be frozen.

Tides—Currents.—Generally, an outflow of low salinity water travels from the Baltic Sea into the Skagerrak via the Kattegat. This outflow then mixes with water of higher salinity setting NE off the NW coast of Jutland (Denmark). The resulting N flow is mostly confined to the Swedish side of the Skagerrak until it turns W near the entrance to Oslofjorden. This flow then sets SW toward Kristiansand. The outflow of low salinity water is normally enhanced by fresh water from coastal rivers and fjords.

The center of this counterclockwise circulation lies about midway between the coasts of Jutland (Denmark) and Norway. The NE flow off Jutland attains a rate of 1 to 1.5 knots, the N flow off the coast of Sweden attains a rate of 1 knot, and the W flow attains a rate of 0.5 knot. The SW flow, at about 4 to 8 miles off the SE coast of Norway, attains a rate of 1 to 2 knots; however, at 20 to 30 miles from the shore the flow is weak and variable.

Pilotage.—Vessels shall be subject to compulsory pilotage when navigating within the base line (straight lines drawn between the outermost points along the coast and which form the starting point for determining the territorial limits). These regulations shall not apply to the waters around Svalbard and Jan Mayen, nor will they apply under the following circumstances:

1. It is required by international law.
2. A military or civilian vessel is under military command.

Vessels shall not be subject to compulsory pilotage in the following areas within the base line:

1. Oslofjorden—Up to the pilot embarkation position at Store Faerder and Vidgrunnen.
2. The Greenland area—Up to the pilot embarkation position at Langesundsbukta.
3. The Sunnmøre of Romsdal waters—Up to the pilot


embarkation positions at the following places:

- a. Vanylvsgapet.
- b. Breisundet.
- 4. The Nordmore waters—Up to the pilot embarkation position at Grip.
- 5. The Trondelag waters—Up to the pilot embarkation positions at Hestvka, Namsen and Grinna.
- 6. The Nordre Norland waters—Up to the pilot embarkation position in Vestfjordbassenget.
- 7. The Troms waters—Up to the pilot embarkation position in Fugloyfjorden.

8. The Finnmark waters—Up to the pilot embarkation positions at:

- a. Akkarflordaeringen.—This shall not apply to vessels over 20,000 gt, that carry dangerous or polluting cargo in bulk that is mentioned in the IGC Code or MARPOL Annex I, or cargo falling into pollution categories X, Y or Z that is regulated by MARPOL Annex II (see chapters 17 and 18 of the International Bulk Carriers Code).
- b. Saerholthavet at Honningsvag.
- c. Batsfjorden.
- d. Varangerfjorden and off Kirkenes and Vadsø.

Norway—Pilot Booking Centers					
Center	Area	Telephone	Facsimile	E-mail	VHF channel
Lodingen	West coast of Norway N of 65°08'N to the Russian border	47-76-986810	47-76-986820	pilot.lodingen@kystverket.no	13
Kvitsoy	West coast of Norway S of 65°08'N to W of Egersund	47-51-735397 47-51-735398	47-51-735391	pilot.kvitsoy@kystverket.no	13
Horten	South coast of Norway from W of Egersund to the Swedish border	47-33-034954 (Skagerrak Maritime Traffic Area)	47-33-034999	pilot.horten@kystverket.no	13
		47-33-034970 (Oslofjorden Maritime Traffic Area)			

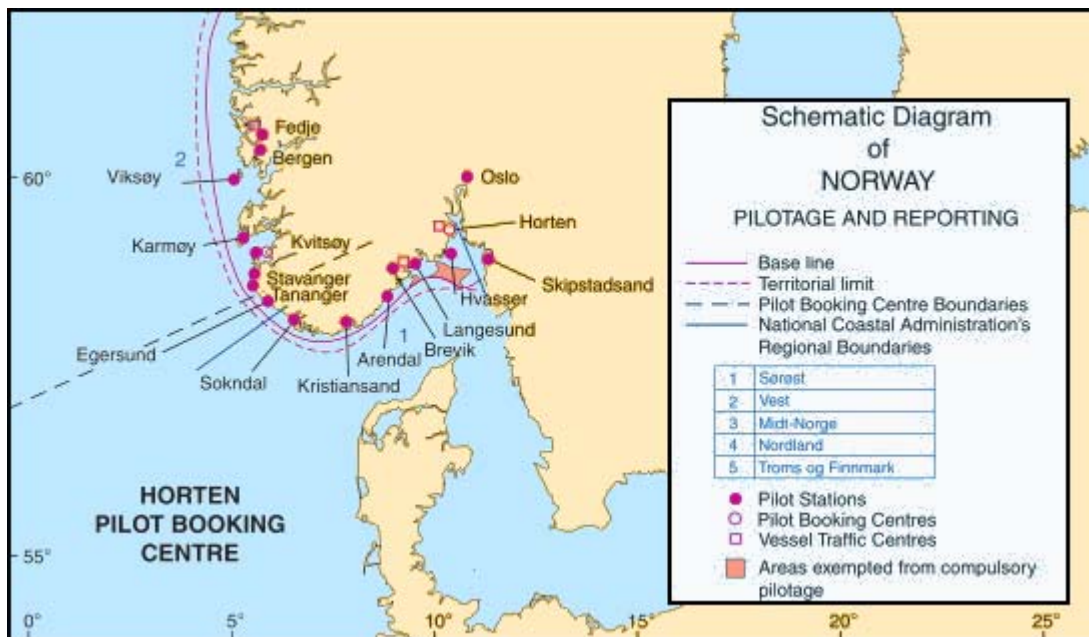

Horten Pilot Stations and VTS Stations

The Horten Pilot Booking Center area extends E from Egersund (58°27'N., 6°00'E.) to the Swedish border. All vessels must send an ETA and arrange pilotage services 24 hours prior to arrival. The practice of requesting pilots through the local stations has been discontinued. For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

The Norwegian Pilot Guide

<https://dnl.kartverket.no>

Regulations.—Speed is limited to 5 knots when navigating in waters less than 100m from the shore, boat harbors, anchored boats, etc.; and within 50m of public and private beaches. Public bathing places are marked by orange buoys (with an orange spherical topmark). Passing inside of these is prohibited.

Sea Safe Net (SSN) is a mandatory reporting system operated by the Norwegian Coastal Administration for all vessels entering Norwegian ports. For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

It is reported that the Baltic Sea has been designated a Sulphur Emission Control Area and regulations concerning the sulphur content of fuel used by vessels apply. For further information, see MARPOL 73/78 Annex VI regulations.

Norwegian authorities recommend that tankers of 40,000 dwt and above, when navigating off the coast of Norway, should keep to seaward of a line joining the following positions:

1. Bearing 187°, distant 13 miles from Lindesnes Light (57°59'N., 7°03'E.).
2. Bearing 180°, distant 12 miles from Ryvingen Light (57°58'N., 7°29'E.).
3. Bearing 180°, distant 15 miles from Songvar Light (58°01'N., 7°48'E.).
4. Bearing 146°, distant 15 miles from Oksoy Light (58°05'N., 8°03'E.).
5. Bearing 156°, distant 12 miles from Svenner Light (58°58'N., 10°09'E.).
6. Bearing 135°, distant 2.5 miles from Faerder Light (59°02'N., 10°23'E.), at the S end of the Oslofjorden TSS.

Vessel Traffic Service.—NOR Vessel Traffic Service (NOR VTS) is in operation for vessels transiting the Norwegian Economic Zone (NEZ) from the Norway/Sweden border in the S to the Norway/Russia border in the N. The NEZ also includes the areas around Svalbard and Jan Mayen Island.

The VTS is designed to promote safe and efficient navigation and to protect the marine environment. The VTS will monitor traffic, exchange information, and interact with vessels and government agencies. It will also coordinate, on a daily basis, tug boat preparations in northern Norway in conjunction with Regional Headquarters North Norway (Norwegian Armed Forces). The VTS also monitors the seaward approaches to the ports of Melkoya and Hammerfest.

NOR VTS cooperates in close coordination with the Norwegian Coastal Administration's Department for Emergency Response, the Norwegian Armed Forces, and the Joint Rescue Coordination Center, Northern Norway, and coastal radio sta-

tions. All vessels entering and proceeding in the NOR VTS area of operation are strongly urged to follow the recommendations, guidance, and advice provided by NOR VTS.

NOR VTS—Contact Information

Traffic/VTS

Call sign	NOR VTS
VHF	VHF channel 16
Telephone	47-78-989-898
MMSI	002573550
E-mail	nor.vts@kystverket.no

All tankers, all vessels exceeding 5,000 gross tons, and all ocean-going tugs in transit outside Norwegian territorial waters (12 miles off the baseline) are requested to report the following information to NOR VTS upon entering the Norwegian Economic Zone (NEZ):

1. Vessel name.
2. IMO Number.
3. Primary telephone number.
4. Primary facsimile number.
5. E-mail address.
6. Primary INMARSAT-C number.
7. Cargo type, including UN reference number(s) (IM-DG Code).
8. Amount of cargo (metric tons).
9. Amount of bunker oil (metric tons).
10. Bunker oil (UN reference number).
11. Number of crew.
12. Number of passengers.
13. Departure port.
14. Departure time in UTC (6 digits—ddhhhh).
15. Arrival port.
16. ETA in UTC (6 digits—ddhhhh).

The VTS will forward information of relevance for safe transit through the VTS coverage area. Vessels which are damaged or receive damage that can affect safe navigation must immediately report this information to the VTS.

Communication with the VTS can take place via any Norwegian coast radio station by requesting a VHF connection to NOR VTS.

Directions.—From a position located about 4 miles S of Lindesnes, the coastal route leads E and then ENE for 15 miles to a position S of Mandal (58°02'N., 7°28'E.). It passes outside the 200m curve and clear of all dangers. The route then continues E for 6 miles and ENE for 16 miles to a position SSE of Kristiansand. It passes inside the main fishing ground.

An inner passage, available to coasters and small craft, leads between the mainland coast and the archipelago of off-lying islands and islets. However, local knowledge and local large-scale charts are required for navigation along this route. Entry into the inner passage is restricted for foreign vessels.

Caution.—In heavy gales, the sea often breaks over ground with depths of less than 40m, especially if the depth is greater on the side from where the swell comes.

Dangers off this coast may often be detected by noticing a

number of sea birds, especially gulls, near the surface of the water, as they gather in the vicinity of shoals to catch small fish.

The seaway in and around Kristiansandsfjorden is the site of both several overlapping firing areas and a restricted area, in which navigation is controlled by regulation.

Certain areas within the Sorlandet Maritime Defense District are prohibited to navigation. These areas generally lie within 50m of the shore around Kristiansand (58°09'N., 8°00'E.), and Mandal (58°02'N., 7°28'E.). However, details of the limits should be obtained locally. Photography is also prohibited. For further details, see Pub. 140, *Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas*.

Sea waves are generated locally by the wind and can vary in direction. Some of the roughest seas are experienced when a vigorous secondary depression develops in the Skagerrak or W of the area. Strong to gale force winds generated between SW and NW are not unusual. In the many inlets and fjords, the seas are generally less than they are over open water. Although, where there is a funneling of the wind, the seas may be higher than expected.

Fishing is a year-round industrial activity with seasonal concentrations in various localities; most fishing is in coastal and fjord waters, but there has been a great extension seaward in recent years. The seasonal aspect is marked mostly in coastal waters where there may be large gatherings of vessels with fishing gear. Other vessels should keep a safe distance when transiting through these areas and avoid the congested fishing harbors.

During the period of drift net fishing for mackerel (May to July) all vessels, except the tankers stated above, are requested to keep within 4 miles of the coast in the area E of Lindesnes as the main fishing ground lies to seaward of this limit.

Brisling (i.e., sprat or small herring) fishing is active closer inshore and, particularly, within the many inlets indenting the shoreline.

Mackerel fishing takes place in Skagerrak from the end of April until late summer by drift net, purse net, and trolling. The greatest concentration of drift net vessels will be found in the area from Lillesand to Lista. Drift nets may be up to 2 miles long. They are set at sundown and hauled early in the morning, they are marked by floats, and the end of the net is marked by buoys with flags and lights. Drift net vessels often illuminate the net with a searchlight.

Purse nets, marked by floats, are laid from the starboard side of the vessel, which proceeds in a circle and may occupy a considerable area; there may also be a boat with a towline up to 90m long from the vessel. A purse net vessel exhibits, in addition to the lights prescribed by the International Regulations for Preventing Collisions at Sea, two yellow lights disposed vertically and flashing alternately.

Sprat fishing occurs from early June and throughout summer and autumn in the fjords of S Norway; Oslofjorden is considered a good area. Fishing is carried out mainly by purse nets and partly by land nets. The catch from a purse net is released into a tow net, which is then brought inshore and transferred to a land net.

Coalfish and tunny fishing take place off the coast from May until autumn. Purse nets are used and may extend up to 146m.

Trawling is carried out mostly outside the fishery limits, but shrimp and float trawlers may be met inside them. When work-

ing in pairs at night, each trawler uses a searchlight trained in the direction of the other vessel.

Off-lying Dangers

1.2 Along the S coast of Norway, there are several sections within which unusually rough seas often prevail. Extreme sea conditions and breaking surf have been observed, often in connection with the currents, in the vicinity of these areas. These sections, known as Dangerous Wave Areas, may be seen on the graphic titled *Dangerous Wave Areas off the Norwegian Coast* and are described below, as follows:

Area 1.—Sletta (59°29'N., 5°10'E.) lies about 6 miles NW of Haugesund. In this area the depths vary greatly from shallow shoals to 250m. Very confused seas occur when the waves are from W to NW.

Area 2.—Skotamedgrunnen (58°48'N., 5°26'E.) is a dangerous area extending about 2 miles around a shoal in a SW-NW direction. The depths vary from 40m close W of the shoal to 16m E of it. Waves from SW to NW create heavy seas and breakers have been observed in this area.

Area 3.—Siragrunnen (58°16'N., 6°20'E.) lies off the channel to Ana-Sira, where the depths vary from 10 to 100m. Current conditions in the area are very variable. Farther offshore, the coastal current flows NE; however, between the shore and the coastal current, there is a countercurrent flow.

The runoff at the entrance to Ana-Sira discharges at a maximum rate of 3 knots. This area should be avoided in bad weather. The SE wind over the variable S to NW current creates rough seas.

Area 4.—Listafjorden (58°10'N., 6°35'E.) lies at the entrance to a fjord gap, 1 mile wide, between Hydra and Varne-set. Rough seas and swells break steeply from depths of about 300m onto the shore.

Area 5.—(58°03'N., 6°40'E.). The seabed slopes steeply along the 7 miles of coast at Lista, between Steinodden and Rauna. This causes wave refraction. Additionally, the current conditions vary with formations of eddies. The confused sea can be rough. Heavy breakers have also been observed in this area.

Area 6.—(57°58'N., 7°30'E.). The coastal current around Ryvingen Light, off Mandal, normally runs W. Winds from SW to W, interact with the current and generate big seas and breakers in the area.

Area 7.—(57°50'N., 6°00'E. to 57°40'N., 8°30'E.). This is a large area lying in the NW part of the Skagerrak, off the S coast of Norway. Depths are mainly less than 100m with the exception of Norskerenna. The W coastal current dominates the current pattern. With waves from SW, several refraction centers are created off the coast (over Norskerenna) and, in addition, refractions are caused by the steep seabed near the shore. Interaction between waves and current leads to breakers.

Area 8.—(59°02'N., 10°32'E. to 58°57'N., 9°45'E.). The area extends from Fider (Faerder) to Hvasser/Tjome, past Svenner to Tvistein Light. The waters are 50 to 100m deep, interspersed by a number of shoals. The W current in the area is independent of the tide and has a rate of 1 to 1.5 knots. There are several refraction centers in this area with winds from SW to SE. Winds from SE to SW create the roughest



Dangerous Wave Areas off the Norwegian Coast

seas and heavy breakers in the E part of the area. The sea is described as rough and recoiling from all directions. Waves from SW break heavily in the W part of the area.

Pilotage is not compulsory for the coastal passage but can be arranged, if needed, through Sogndal or Kristiansand Pilot Stations.

Lindesnes to Kristiansandsfjorden

1.3 The coastline between Lindesnes and Kristiansandsfjorden, about 30 miles ENE, is irregular and much indented by an uninterrupted series of coves, small bays, and long, narrow, winding inlets.

Inland, the terrain consists of a succession of low, rocky hills and rolling plains, somewhat forested but barren for the most part, which continue in from the sea about 10 miles before rising steeply to interior highlands and mountains.

The coast is fronted by many forested islands, barren islets, and scattered rocks which generally extend up to 3 to 5 miles seaward. In appearance, most of these islands and islets tend to blend in with their background and produce a combined effect which offers few distinguishing features.

The 200m curve, in general, lies about 1 to 3 miles S of the off-lying dangers, except between Ryvingen (57°58'N., 7°30'E.) and Ballastskjaerene (57°58'N., 7°41'E.), where it is located less than 1 mile seaward.

The coast between Lindesnes and Tanes, 19 miles E, is considered to be one of the most exposed stretches of the Norwegian coast and also one of the most hazardous to navigation.

1.4 Lindesnes (57°59'N., 7°03'E.), the southernmost extremity of the Norwegian mainland, forms an important land-



Lindesnes Light

fall point for vessels entering the Skagerrak from N or W. It consists of a bluff reddish-brown rocky headland, which rises abruptly to a height of 40m. This headland is steep-to and the depths give vessels little indication of their distance from the land.

A light is shown from a prominent tower, 16m high, standing on the headland.

Neskletten (57°58'N., 7°02'E.), a shoal bank with a least depth of 22m, extends up to about 1.3 miles S of Lindesnes Light and the sea sometimes breaks on it.

The land in the vicinity of Lindesnes is bold, rugged, and moderately high. However, it is difficult to differentiate when seen from seaward because the natural landmarks do not particularly stand out and tend to merge with one another. On

closer approach, the light structure on the headland will become conspicuous. Inland, the peninsula located behind Lindesnes rises to several prominent peaks. These peaks are generally covered with snow and are visible during clear weather, in spring, from a distance of 30 to 40 miles.

The more prominent peaks include Neskongane (58°00'N., 7°05'E.), with several knolls rising to heights of about 90m; Skipmannsheia, 153m high; and Presthusveten (58°03'N., 7°07'E.), 185m high.

Lista Light, equipped with a racon, is shown from a prominent tower, 34m high, standing 17 miles WNW of Lindesnes Light.

For a description of the waters lying W of Lindesnes Light, see Pub. 182, Sailing Directions (Enroute) North and West Coasts of Norway.

1.5 Udvar (57°59'N., 7°13'E.), a small rocky island, lies about 5 miles E of Lindesnes Light and is reported to be radar conspicuous. A light is shown from a building standing on the S end of this island. Udvar lies at the S end of a group of islands, islets, and rocks. Vare, located 1.5 miles N of Udvar, is the largest island of this group and, together with Udvar, rises to the same height as the mainland. The group resembles a lofty promontory until approached close enough for the intervening channels to be distinguished.

Kletten (57°57'N., 7°12'E.), with a least depth of 8m, is the southernmost of a chain of shoals, which extends up to about 2 miles S of Udvar. Gjeslingane, consisting of two rocks awash, lies 0.8 mile N of Kletten and is marked on the W side by a perch.

Langebaene (57°59'N., 7°09'E.), lying between Lindesnes and Udvar, consists of numerous dangers and several rocks, which are grouped around a small central drying area.

Tvistainen, a reef, lies 3 miles E of Udvar Light and partly dries. It is the southernmost danger in this vicinity. During S or SW winds, the sea breaks on ground with depths of 18 to 22m lying near the outer edge of this reef.

Ramslandsvagen (58°02'N., 7°07'E.), a small inlet, is entered 3 miles NNE of Lindesnes. It provides anchorage, in a depth of 15m, sand and clay, close to the W shore and 0.5mile within the entrance. The approach to the inlet is encumbered by reefs and islets, which form a natural breakwater near the entrance. Local knowledge is required. During strong NW winds, a choppy sea forms in the inlet and adjacent waters.

Several other small fjords and bays in this area provide shelter to coasters and small craft; however, the approaches are intricate and local knowledge is necessary.

Hille (58°00'N., 7°22'E.), a relatively large island, lies 4.5 miles ENE of Udvar and rises to a height of 98m near its center. A bay on the N side of this island provides anchorage, in depths of 20 to 34m.

Conspicuous landmarks along this part of the coast include Hovenuten (58°05'N., 7°17'E.), which rises to a height of 209m, and Skeggstadheia, 1.5 miles SSE, which rises to a height of 202m.

1.6 Mannefjorden (57°59'N., 7°28'E.), located 13 miles E of Lindesnes Light, is a deep and somewhat narrow sea area, which provides relatively clear access to the Mandalselva River



Ryvingen Light

Ryvingen (57°58'N., 7°30'E.), a conspicuous island, lies at the E side of the entrance to Mannefjorden. A light, equipped with a racon, is shown from a prominent tower, 22m high, standing on the southwesternmost peak of this island. A beacon is situated close ENE of the light.

Hjelmen and Eigelandskjaer, two small islets, lie close N of Ryvingen, and are conspicuous by reason of their dark brown color. Similarly a strip of sandy beach lying at the head of the fjord and W of the river entrance is visible for a considerable distance because of its bright yellow color.

Two hills, Kalven and Kua, stand in the NE corner of the fjord and are about 120m high. These hills are conspicuous because of their haystack form, but are obscured to vessels proceeding from Lindesnes by the high peaks rising on the island of Hille.

Anchorage.—Large vessels may anchor, in depths of 9 to 11m, about 0.3 mile NNW of Hattholmane Light (58°00'N., 7°27'E.). A rock lies about 0.2 mile NNE of this anchorage and should be avoided. It has a least depth of 6m and is marked by a buoy.

Small vessels, with local knowledge, can anchor, in a depth of 12m, sand, about 0.7 mile NW of Hattholmane Light. A rock, with a least depth of 4.3m, lies close E of this anchorage.

Directions.—Several channels lead from seaward through Mannefjorden and its adjacent waters to the inner anchorages and the facilities at Mandal. The principal approach route, used by deep-draft vessels, leads N through Mannefjorden. It passes W of Ryvingen and E of Hattholmane (58°00'N., 7°27'E.), an island marked by a light on its NE side.

Caution.—The Mandalselva River has a continuous outflow which creates eddies W of the mouth.

A submarine cable extends N and NNE for 1.3 miles between a cove located on the SE side of Ryvingen and an inlet on the SW side of Skjernoy. Another submarine cable extends between Hattholmen and the mainland. These cables may best be seen on the chart.

1.7 Mandal (58°02'N., 7°28'E.) (World Port Index No. 23530) is the southernmost town in Norway. It stands at the foot of a low hill on the W bank of the entrance to the Mandalselva River. This river flows into the head of Mannefjorden. The main commercial facilities of the port are situated at Kleven and

Gismeroya, which are located close E of the town and connected by a bridge.

Tides—Currents.—Water levels fluctuate primarily due to meteorological conditions since tidal action is generally very slight or lacking altogether. Currents within the river attain a velocity of several knots but become insignificant outside. Ice is seldom a hindrance.

Depths—Limitations.—The approach channel leading to Gismeroya has a least depth of 11m. The entrance channel leading into the river is dredged to a depth of 4.5m over a width of only 20m. Berths on the river front banks. A bridge, with a vertical clearance of 3.5m, spans the river, 0.6 mile above the mouth.

Gismeroya provides berths. An oil-fueling installation is situated at Homsvik (58°00.4'N., 7°30.0'E.). For more berthing information see the table titled **Mandal—Berth Information**.

Pilotage.—Pilotage is compulsory in the harbor for vessels over 100 gt. Harbor pilots usually board 1.5 miles SE of Oksoy in position 58°03.3'N, 8°05.6'E. For vessels approaching from the W, the pilot boards 2 miles S of Sondre Katland Light in position 58°01.5'N, 6°50.0'E.

Vessels should request pilot services 24 hours in advance through Safe Sea Net (SSN) or the Horten Pilot Booking Center (see paragraph 1.1).

Contact Information.—See the table titled **Mandal—Contact Information**.

Mandal—Contact Information	
Pilots	
VHF	VHF channels 13 and 16
Telephone	47-33-034-954
Port	
VHF	VHF channels 12 and 16
Telephone	47-40-005152
E-mail	mandalhavn@mandal.kommune.no
Web site	https://www.mandlhavn.no

Caution.—In SE strong winds, entry into the river may be impossible.

1.8 The shore between Mannefjorden and Tanes, a point located 6 miles E, is quite regular with the exception of Hartmarkfjorden, which indents the coast for a distance of about 2 miles.

Mandal—Berth Information				
Berth	Length	Depth	Maximum Vessel LOA	Remarks
Kleven Terminal				
Kleven	97m	7.0m	100m	Dry bulk and fishing vessels.
Gismeroya Terminal				
Gismeroya	170m	9.0m	200m	Dry bulk and fishing vessels.

Oddknuppen (57°58'N., 7°34'E.), marked by a light, is the outermost islet of a group of rocks and islets which extend up to about 3 miles seaward.

Gasekjaerene, lying about 2.5 miles ENE of Oddknuppen Light, is a group of rocks, some awash.

Tanes (58°01'N., 7°40'E.) is marked by a beacon, 3m high. This point is low, but it is backed by Eidsveten, a conspicuous hill, which rises to a height of 130m about 1.5 miles NNW.

The coast between Tanes and Kristiansandsfjorden, about 9 miles ENE, is irregular and indented by an uninterrupted series of deep, and often quite narrow, inlets.

The shore is fronted by an area containing numerous low islands, islets, and scattered rocks. These dangers are steep-to and soundings are of little use when approaching from seaward.

Ballastskjaera Light (57°58'N., 7°41'E.) is shown from a framework tower standing on Vestre Ballastskjaer, the southwesternmost rock, dark and awash, of a group of dangers lying centered about 2.3 miles SSE of Tanes. Udvar, the southernmost island of a chain of islands and islets fronting the mainland, lies 2.6 miles NE of this light.

Songvar, fringed by islets and rocks, lies 5 miles NE of Ballastskjaera Light. This island is light colored and has patches of brown.



Songvar Light

1.9 Songvar Light (58°01'N., 7°49'E.) is shown from a building, 10m high, standing on the SE end of Hellersoy, an island lying 0.2 mile S of Songvar.

Vibaen, a rocky shoal, lies about 1 mile SW of Songvar Light. It has a least depth of 15m and is the outermost danger in this vicinity.

Mandal—Berth Information				
Berth	Length	Depth	Maximum Vessel LOA	Remarks
Homsvik Terminal				
Homsvik	72m	12.0m	200m	Dirty products and breakbulk.

Songvarfjorden (58°02'N., 7°48'E.) is a passage leading between the dangers extending S from the mainland and those fronting the N side of Sngvar. It is about 0.4 mile wide and has depths of 50 to 130m. Varholmen, an islet, lies on the N side of this passage, about 1 mile N of the N end of Songvar, and is marked by a light.

An inner passage, recommended only for vessels with local knowledge, leads E from Tanes. It passes N of Udvar and through Songvarfjorden.

Numerous channels entered from seaward lead through the off-lying dangers to the many inlets indenting this stretch of coast. In addition, channels branching from the inner passage lead to several small harbors, anchorages, and marinas. However, local knowledge and local large-scale charts are required for navigation in this area.

The main anchorage and harbor areas lying within the archipelago bounded by Sandoyhavn in the W and Nodenest in the E are found in the table titled **Main Harbor and Anchorage Areas**.

Main Harbor and Anchorage Areas	
Sandoyhavn	57°58'N, 7°33'E.
Odoyfjorden	57°59'N, 7°35'E.
Tredge	58°00'N, 7°34'E.
Ny Hellesund	58°03'N, 7°51'E.
Hollen	58°05'N, 7°49'E.
Nodenest	58°04'N, 7°52'E.

Kristiansandsfjorden

1.10 Kristiansandsfjorden (58°06'N., 8°02'E.), located 33 miles ENE of Lindesnes, is the first major fjord or inlet to indent the S coast of Norway. It provides access to the extensive port of Kristiansand. The terrain surrounding this fjord is relatively level and consists, in general, of bare, dark gray stone slopes alternating with forested hillocks. The fjord, which is an arm of the sea, extends N for about 5 miles and is 1.7 miles wide. It leads into Topdalsfjorden which then continues N for about 6 miles. The inlet is deep throughout and, with depths over 200m in its middle part, is able to accommodate vessels with the deepest draft.

In general, as is common along this coast, Kristiansandsfjorden is difficult to identify from seaward because the off-lying islands and islets tend to merge with the forested hills of the mainland background.

Kristiansands Høye Land (58°19'N., 7°45'E.), situated about 13 miles NNW of Kristiansand, is an uncharted mountain ridge which rises to two unequal humps. This ridge slopes gradually to the E and, from the higher of the two humps, falls

off abruptly to the W. It is usually one of the first landmarks to be observed when approaching the coast. This ridge is often distinguishable from the surrounding mountain features due to its distinctive bluish color. It is reported, in clear weather, to be visible from a distance of about 30 miles.

Den Omvedte Bat, a hill which resembles a capsized boat, rises about 2.5 miles NNW of Kristiansand and is very conspicuous from seaward.

A smelting works situated at Fiska, 1.2 miles SW of Kristiansand, emits smoke from a chimney, which is often visible to seaward well before any other landmarks in the area can be identified.

Ytre Flekkeroy (58°04'N., 8°00'E.), a large island, obstructs the W side of the entrance to the fjord. Numerous islets and rocks extend up to about 1.5 miles seaward from the S and SE sides of this island and may best be seen on the chart.

Bergenesodden Light (58°03.5'N., 7°58.6'E.) is shown from a framework tower standing on the SW end of Ytre Flekkeroy. A conspicuous radio mast is situated about 0.4 mile ENE of this light.

Svensheia (58°05'N., 7°55'E.), a prominent hill, is situated on the mainland at the W side of the entrance to the fjord. It is 114m high and rises 2.5 miles NW of Bergenesodden Light.

Blaestholmen Light (58°03.4'N., 8°00.6'E.) is shown from a tripod structure standing on an islet lying 1 mile E of Bergenesodden Light.

Hanegalsbaen, a detached shoal patch, lies about 2.2 miles SW of Bergenesodden Light. It has a least depth of 6m and is marked by a buoy. This shoal forms the outermost danger in this vicinity.

1.11 Oksoy (58°04'N., 8°03'E.), a small and low island, lies near the center of the entrance to the fjord, 1.7 miles ENE of Blaestholmen Light. A shoal bank, with depths of less than 10m, extends about 1 mile S and SSW from the S end of this island. A spit, with depths of less than 5m, extends about 0.3 mile N from the N end of this island.

A light, equipped with a racon, is shown from a prominent tower, 36m high, standing on the S part of the island.

Kinn Light (58°05.7'N., 8°02.3'E.) is shown from a structure standing on the N end of a small island lying off the NE side of Ytre Flekkeroy, 1.6 miles NNW of Oksoy Light.

Ostre Randoy (58°06'N., 8°07'E.), a low island, lies in the center of a group of islands, islets, and rocks which obstructs the E side of the entrance to the fjord and may best be seen on the chart.

Odderoya Light (58°08'N., 8°00'E.), situated 2.3 miles NNW of Kinn Light, is shown from a tower structure, 6m high, standing on the foreshore at the SW side of an island of the same name. This island rises to a height of 90m. The former conspicuous lighthouse building is situated close behind the

light structure.



Kristiansand



By Peulle (Own work) [CC BY-SA 4.0 (<http://creativecommons.org/licenses/by-sa/4.0/>)], via Wikimedia Commons

Oksoy Light

Gronningen (58°05'N., 8°05'E.), an islet, lies on a reef at the SW end of the group, 1.3 miles ENE of Oksoy Light. A light is shown from a tower surmounting a building, 14m high, standing on the N extremity of this islet.

Skogrunnen, a rocky shoal with a least depth of 8.5m, lies at the S end of a bank, about 1.5 miles ESE of Gronningen Light, and forms the outermost danger in this vicinity.

1.12 Vestregapet (58°04'N., 7°57'E.), the SW and second-

ary approach from seaward into Kristiansandsfjorden, leads between the SW side of Ytre Flekkeroy and the numerous islets and rocks lying S of the mainland coast. Flekkeroygapet, the continuation of this passage, is a narrow channel lying between the NW side of Ytre Flekkeroy and the irregularly-formed mainland peninsula of Indre Flekkeroy. The route then joins the SE approach through Kristiansandsfjorden.

Oksoygap (58°05'N., 8°05'E.), the SE and main approach from seaward into Kristiansandsfjorden, leads between the dangers fronting the E side of Oksoy and similar dangers fronting the W side of Gronningen. This passage, which has a least width of about 0.6 mile, is deep. The fairway, which passes NE of Kinn Light, is indicated by the white sector of Odderoya Light.

Foreign commercial vessels must enter Kristiansandsfjorden by proceeding through Oksoygap.

Tides—Currents.—A prevailing W setting coastal current enters Kristiansandsfjorden through the SE approach, passes N of Ytre Flekkeroy and exits through the SW approach. Concurrently, fresh water discharged into Tovdalsfjorden and the upper reaches of Kristiansandsfjorden first sets S then, deflected by its encounter with the coastal current, similarly exits through the SW approach. Currents are therefore generally stronger in the SW approach than in the SE approach and may reach a velocity of 3 knots, particularly during periods of fresh water run-off caused by rain or melting snow.

Pilotage.—Pilotage is compulsory for all foreign commercial vessels during transit of the waters within the restricted ar-

ea fronting Kristiansandsfjorden. Such vessels may not navigate in any channel other than the SE approach passage leading to Kristiansand or Tovdalsfjorden.

Vessels should arrange for pilot services through Safe Sea Net (SSN), or via the Horten Pilot Booking Center, 24 hours in advance (see paragraph 1.1). Vessels should send an ETA 5 hours prior to arrival and 2 hours prior to arrival. Pilots board 1.5 miles SE of Oksoy and 1.5 miles ESE of Songvar Light.

The station at Kristiansand also provides pilots for Farsund, Agnesfost, Lillesand, Grimstad, Risor, and Arendal.

Kristiansandsfjorden—Pilot Information	
Boarding Positions	
SE of Oksoy	57°58'N, 7°33'E.
ESE of Songvar	57°59'N, 7°35'E.
Contact Information	
VHF	VHF channels 13 and 16
Telephone	47-33-034-954

Regulations.—A restricted area, in which navigation is controlled, fronts Kristiansandsfjorden and the adjacent waters. The seaward limit of the area is formed by a line joining Arosveten (58°04'N., 7°50'E.), Hellersoy (58°01'N., 7°49'E.), Lille Svarten (58°03'N., 8°01'E.), Meholmskjaer (58°06'N., 8°12'E.), Langbaen (58°07'N., 8°15'E.), and Krygholmen (58°07'N., 8°14'E.). Foreign commercial vessels may only enter this area via Oksoygap and with an authorized pilot on board.

Caution.—A disused explosives dumping area, the limits of which may best be seen on the chart, lies centered 1 mile NW of Gronning Light.

An explosives dumping area, the limits of which may best be seen on the chart, lies centered 8 miles S of Oksoy Light.

Several submarine cables, which may best be seen on the chart, extend the length of the fjord and lead seaward through Oksoygap.

Kristiansand (58°09'N., 8°00'E.)

World Port Index No. 23550

1.13 Kristiansand stands on a sandy plain about 5 miles inside Kristiansandsfjorden. It is located on the W side of the

mouth of the Otra River. The port area is divided into two sections by the forested island of Odderoya, which lies S of the town. Vesterhavn, the W section, along with its SW extension Fiskabukta, is commonly used by commercial shipping. This area is considered to be one of the finest natural harbors in Norway because of its shelter, room, convenient depths, and easy access. There is sufficient space to accommodate a large number of vessels in this section. S of the commercial port are several shipyards with industrial plants stand along the mainland shore of Vesterhavn and Fiskabukta.

Austerhavn (Osterhavna), the E section, is open to the SE and mostly encumbered by a shallow bank. It has several marinas and is used mostly by only small craft. A former naval base, which closed in 2002, is situated at Marvika, 1 mile E of the town.

Port of Kristiansand
https://www.portofkristiansand.no

Ice.—Ice is seldom a concern for shipping. In severe winters, from the middle of February to the beginning of March, it may become a hindrance, but never so great that icebreakers cannot keep the harbor open and clear.

Tides—Currents.—Tides in the harbor are mostly negligible but a rise of 0.3m is referenced for HW springs. During storms, with strong S or W winds, the water level may rise by as much as 0.6m. With strong N or E winds, the water level may decrease by the same amount.

Water flowing from the Otra River empties into Austerhavn and often produces a noticeable set which flows toward the small islands lying on the NE side of Odderoya.

Depths—Limitations.—Vessels up to 40,000 dwt, 200m in length, and 10.9m in draft can be accommodated. The principal commercial berths, with alongside depths, are included in the table titled **Kristiansand—Berth Information**.

The port has facilities for general cargo, ro-ro, cruise, container, ferry, tanker, bulk, and fishing vessels. In addition, there are several shipyards, lay-up anchorages, and facilities for servicing oil and gas rigs.

The port has several dry docks. Several specialized berths, used by small vessels, are situated along the lower banks of the Otra River. The bar at the mouth of this river has a depth of 3.7m. A bridge, with a vertical clearance of only 4m, spans the river 0.5 mile above its mouth.

Kristiansand—Berth Information						
Berth	Length	Depth	Maximum Vessel			Remarks
			LOA	Draft	Size	
Breakbulk Terminal						
No. 45	100m	4.5m	—	—	—	Cement and general cargo.
Cruise Terminal						
No. 13	295m	10m	—	—	—	Cruise and breakbulk.
Dry Bulk Terminal						
Dry Bulk	242m	10.6m	—	10.9m	—	Breakbulk, others, and bulk cargo.

Kristiansand—Berth Information						
Berth	Length	Depth	Maximum Vessel			Remarks
			LOA	Draft	Size	
Ferry Terminal						
No. 6A	48m	2m	—	—	—	Fast ferries.
No. 6B	48m	2m	—	—	—	—
No. 1A	210m	8.8m	—	—	—	Ro/Pax.
No. 1B	218m	8.7m	—	—	—	Ro/Pax.
No. 1	100m	6.6m	—	—	—	Ro/Pax.
No. 2	180m	5.6m	—	—	—	Fast ferries.
No. 2A	166m	7.4m	—	—	—	Fast ferries.
Fishing Terminal						
No. 12	155m	3.2m	—	—	—	Fishing vessels.
Freight Terminal						
No. 03	144m	5.7m	—	—	—	Containers.
No. 20	265m	7.3m	—	—	—	Ro-ro/lo-lo, containers, and general cargo.
No. 21	110m	7.3m	—	—	—	Fertilizer, breakbulk, and bulk cargo.
No. 09	183m	8.5m	—	—	—	Ro-ro freight and container.
Seafront Terminal						
No. 35	144m	13.2m	—	—	—	Ro-ro freight, containers, breakbulk, and general cargo.
No. 36	307m	12.2m	—	—	—	Offshore, shiplift/LASH, breakbulk, and bulk cargo.
Service Terminal						
No. 22	34m	8m	—	—	—	Berthing length of 61m (incl. dolphins). Coastal vessels.
Equinor Terminal (Kolsdalsodden)						
No. 109	15m	10m	120m	—	10,160 dwt	Bunkers.
Hydro Texaco Terminal (Kroodden)						
No. 150	14m	7.5m	100m	—	8,000 dwt	Clean products.
Shell Terminal (Odderoya)						
No. 16	63m	10.7m	200m	—	40,000 dwt	Bunkers.

Aspect.—Hogfjell, a prominent hill, rises at the E side of Ytre Flekkeroy, about 0.9 mile NNW of Blaestholmen Light. It is 52m high and surmounted by a radio mast.

A cathedral, with a prominent spire, stands in the middle of the town. A conspicuous radio mast, with satellite dishes, is situated about 0.7 mile SSE of the cathedral, near the middle of Odderoya.

Pilotage.—See Pilotage under Kristiansandfjorden in paragraph 1.1 and in paragraph 1.12.

Contact Information.—See the table titled **Kristiansand—Contact Information.**

Anchorage.—Vesterhavn provides sheltered anchorage for

up to six large vessels, in depths of 15 to 40m, mud, sand, and scattered patches of rock. A rock is situated upon a shoal, with a depth of 12m, in the NW part of the anchorage. Fiskabukta also provides sheltered anchorage for large vessels.

Caution.—A measured distance of 1,852m, which may best be seen on the chart, is situated at the E side of Byfjorden, 1 mile N of Kinn Light, and is marked by beacons on Dvergsøya (58°06'40.8"N., 8°03'25.8"E.) and Revholmane (58°07'33.6"N., 8°02'2.4"E.). It is reported these beacons are in poor condition and not readily visible. Submarine cables located at the entrance of Vesterhavn and Austerhavn are best seen

on a chart.

Kristiansand—Contact Information	
Pilots	
VHF	VHF channels 13 and 16
Telephone	47-33-034-954
Port	
VHF	VHF channels 12 and 16
Telephone	47-38-006-000
	47-38-006-010
Facsimile	47-38-027-099
	47-38-006-023
E-mail	post@kristiansand-havn.no
Web site	https://www.kristiansand-havn.no

1.14 Tovdalsfjorden (58°07'N., 8°03'E.), the continuance of Kristiansandsfjorden, is generally quite deep throughout but the entrance is somewhat obstructed by several off-lying rocks.

A suspension bridge, with a vertical clearance of 27m, spans the fairway about 1.2 miles within the entrance. A submarine pipeline, which may best be seen on the chart, crosses the inlet close below the bridge.

Gleodden (58°08.8'N., 8°02.3'E.), marked by a light, is the W entrance point of this inlet.

Marvika, a cove located close N of Gleodden, is the site of a small naval base. Navigation and anchorage are prohibited within the vicinity of this cove.

Alefjaer (58°14'N., 8°02'E.) is located at the head of Alefjaerfjorden, a continuation of Tovdalsfjorden. This small harbor has a berth, 35m long, with depths of 3.9 to 4.4m alongside. It is used by small vessels to load timber.

Anchorage.—Tovdalsfjorden provides good anchorage throughout, in depths of 13 to 43m. Kongsgardbukta (59°09.4'N., 8°02.2'E.), about 0.7 mile WSW of the Varodden Bridges, and about 0.5 mile N of Gleodden, at the W side of the fjord, forms a good lay up area, containing two berths with lengths of 140m and 160m. Anchorage is available, in depths of 23 to 27m, mud, and is reported to contain a number of mooring buoys.

Kristiansandsfjorden to Arendal

1.15 The coast between Kristiansandsfjorden and the approaches to Arendal, about 27 miles NE, is irregular with an uninterrupted series of coves, small bays, and inlets of a generally moderate size throughout. Inland, the terrain continues as a succession of low, rocky hills and rolling plains which become more forested the greater the distance from the open sea. The land has a general light gray color as far as Homborsund, 15 miles NE. It then has a dark gray shade, except for a stretch extending 5 miles NE of Grimstad (58°20'N., 8°36'E.), which has an easily identifiable and prominent reddish-brown color. Off-shore, the coast continues to be fronted by many islands, numerous islets, and a multitude of scattered rocks which are

generally barren. In appearance, they all tend to merge with the mainland background which is largely void of any distinguishing features. In places, breakers on the coastal bank have been observed up to 1 mile seaward of the outer dangers. The 200m curve parallels the coast and lies between 2 to 4 miles seaward of the dangers, except near Kvasefjorden, where it closes to a distance of about 1 mile.

Directions.—From a position located about 5 miles SSE of Oksoy Light (58°04'N., 8°03'E.), off the entrance to Kristiansandsfjorden, the coastal route leads ENE for 10 miles and then 23 miles NE to a position 4 miles ESE of Torungen Light (58°24'N., 8°48'E.). It passes outside the 200m curve and clear of all dangers.

An inner passage, available to coasters and small craft, leads between the mainland coast and the archipelago of off-lying islands and islets. However, local knowledge and local large-scale charts are required for navigation along this route. Entry into the inner passage is restricted for foreign vessels (see paragraph 1.12).

1.16 Kvasefjorden (58°07'N., 8°12'E.) is located 4.5 miles NE of Oksoy Light (58°04'N., 8°03'E.) and extends N for about 3.5 miles. This fjord is quite deep throughout but the entrance is largely encumbered by many off-lying dangers which may best be seen on the chart.

Torsoy Light (58°06'N., 8°09'E.) is shown from a structure standing on the E extremity of Torsoya, an island lying at the W side of the fjord.

Ytre Hausane (58°06'N., 8°11'E.), with a least depth of 4.5m, lies about 1.8 miles SE of Torsoy Light and is marked by a lighted buoy. Sorenshausen, a detached shoal patch, lies about 0.7 mile ENE of Ytre Hausane and has a depth of 15m. These detached rocky shoals form the outermost dangers lying off the entrance to the fjord.

Anchorage.—Large vessels can anchor near the head of Kvarnesfjorden, a bay lying on the W side of Kvasefjorden, about 1.5 miles within the entrance. Large vessels may also anchor in Dypingen, a narrow bay lying on the E side of the fjord. An uncharted hill stands on the E side of Dypingen. It is distinctive from the SW because of the steep slope on its W side.

Caution.—Several submarine power cables, which may best be seen on the chart, extend through the middle of Kvasefjorden and then project seaward across the Skagerrak. These cables may cause magnetic anomalies.

1.17 Natviktangen Light (58°08'N., 8°15'E.) is shown from a structure standing on a small mainland promontory, 4 miles NE of Torsoy Light. This promontory is fronted by numerous dangers which may best be seen on the chart.

Bleikgrunnen (58°05'N., 8°15'E.), a detached rocky shoal, lies about 2.6 miles SSW of Natviktangen Light and seldom breaks. It has a least depth of 18m and forms the outermost danger lying to the S of the light.

Roynevardsgrunnen (58°08'N., 8°20'E.), a detached rocky shoal, lies about 2.5 miles ESE of Natviktangen Light and has a least depth of 16m. Sandsloa, an isolated rocky patch with a least depth of 19m, lies about 0.3 mile SW of this shoal. These rocky patches form the outermost dangers lying to the E of the light.

Makrelhausen (58°09'N., 8°20'E.), a detached rocky shoal,

lies about 2.6 miles ENE of Natviktangen Light and has a least depth of 12m. A group of rocky patches, with depths of 3 to 10m, extends up to about 0.8 mile N of this shoal. Together, these rocky patches form the outermost dangers lying to the ENE of the light.

Justoya (58°13'N., 8°22'E.) lies 5.5 miles NE of Natviktangen Light, in the SW approach to Lillesand. This large island is located within an area consisting of a multitude of off-lying small islands and islets. Several narrow winding fjords indent this part of the mainland.

1.18 Nodingen (58°11'N., 8°22'E.), a flat-topped islet, lies 0.5 mile SSE of the S end of Justoya. It is marked by a prominent pyramidal beacon. A rocky shoal patch, with a depth of 7.5m lies about 0.6 mile SSE of this islet and at the seaward extremity of a chain of dangers extending ESE from the coast.

Mebo Beacon, a prominent tower, stands at an elevation of 49m on the E side of Justoya, 1.5 miles NNE of Nodingen.

Reierskjaer Light (58°12'N., 8°24'E.) is shown from a structure standing on a rock lying off the SE side of Justoya, 1.1 miles NE of Nodingen. Several detached rocky shoal patches, with depths less than 10m, lie up to about 0.8 mile SSW, 0.5 mile SSE, and 0.3 mile E of this light.

Bregen (58°12'N., 8°25'E.), a rock awash, lies about 2.2 miles ENE of Nodingen and at the E side of an extensive shallow reef. The reef, which may best be seen on the chart, lies in the S approach to Lillesand and is marked by buoys and perches.

Gasa Light (Gasen) (58°13'N., 8°28'E.), equipped with a racon, is shown from a post, 11m high, standing on a small islet lying about 2 mile NE of Bregen, in the SE approach to

Lillesand. Shoals, with rocks awash, extend about 0.4 mile E, SE, and SW from the light. These shoals form the outermost dangers in this vicinity.

Numerous channels entered from seaward lead through the off-lying dangers fronting this stretch of coast. In addition, channels branching from the inner passage lead to several small harbors, anchorages, and marinas. However, local knowledge and local large-scale charts are required for navigation in this area.

The main anchorages and harbors situated along this stretch include Ulvoysund (58°07'N., 8°13'E.), which is used by fishing vessels, and Risholmfloa (58°09'N., 8°16'E.).

Lillesand (58°15'N., 8°23'E.)

World Port Index No. 23570

1.19 Lillesand, a coastal harbor and summer resort, is situated on the NW side of a fjord and sheltered by the many islands lying in the entrance.

Tides—Currents.—Neither currents or tidal waters are especially noticeable in the harbor, which is also generally ice free in winter.

Depths—Limitations.—The main approach to the harbor is from SE, passing between Gasa Light and Bregen. The channel has a least depth of 55m.

The main harbor provides 13 berths. There are berths at Fossbekk, 0.4 mile SW of the main harbor. Vessels with a draft of up to 7.3m can be handled. For more berthing information see the table titled **Lillesand—Berthing Information**.

Lillesand—Berthing Information				
Berth	Length	Depth	Maximum Vessel Draft	Remarks
Kokkenes Terminal				
Kokkenes	80m	9.5m	—	Passengers and breakbulk.
Havnegata Terminal				
Havnegata	48m	—	7.3m	Passengers and breakbulk.
Fossbekk Terminal				
Fossbekk	50m	8m	—	Dry bulk and breakbulk.

Aspect.—Saltholmen Light (58°14'N., 8°24'E.), shown from a structure, 5m high, standing 2.1 miles WNW of Gasa Light, indicates the outer approach from SE. A conspicuous white building is situated close to the light.

A prominent church, yellow with a dark gray roof and a spire, stands in the town. Floresteinen, a prominent hill, rises close E of Lillesand and is 82m high. Hisasen, another hill, rises about 4.5 miles NNE of the town and is 242m high.

Pilotage.—Pilotage is compulsory and should be ordered through Safe Sea Net (SSN). For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and

Adjacent Seas. Alternatively the Horten Pilot Booking Center can be used but may incur additional charges.

Pilots board vessels about 1.5 miles SE of Oksoy Light (58°03.5'N., 8°05.6'E.) or 1.5 miles SE of Torungen Light (58°23.5'N., 8°48.6'E.).

Vessels should send an ETA and arrange pilotage services 24 hours in advance (see paragraph 1.1). They should also send an ETA to the port through their agent 24 hours, 12 hours, and 6 hours in advance.

Contact Information.—See the table titled **Lillesand—**

Contact Information.

Lillesand—Contact Information	
Pilots	
VHF	VHF channel 16
Telephone	47-33-034-954
Port	
VHF	VHF channels 13 and 16
Telephone	47-37-261-500

Anchorage.—Anchorage is available, in depths of 20 to 30m, sand and clay with good holding ground, in the fjord off the harbor. Local knowledge is advised. Anchorage is also available, in depths of 30 to 40m, mud, within Skallefjorden, a large and sheltered fjord lying 1 mile SW of the town.

Caution.—A magnetic anomaly, amounting to a decrease of about 3° in variation, is reported to exist within an area located in the approaches, about 1 mile WNW of Gasa Light.

1.20 Homboroya (58°15'N., 8°31'E.), lying 2.1 miles NE of Gasa Light, is an island fringed by several islets and rocky shoals. A beacon stands on its E extremity. This island is somewhat lower than the mainland coast and can easily be identified.

Homborsund Light (58°15'N., 8°32'E.) is shown from a tower on a building, 20m high, standing on the S end of an islet lying close off the NE side of Homboroya.



By logopop [CC BY-SA 3.0 (<https://creativecommons.org/licenses/by-sa/3.0/>)], via Wikimedia Commons

Homborsund Light

Knatten (58°15'N., 8°33'E.), a detached shoal patch, lies about 0.9 mile ESE of Homborsund Light. It has a least depth of 13m and forms the outermost danger in this vicinity.

Bjoroya (58°17'N., 8°33'E.), an island, lies 2.3 miles NNE of Homborsund Light and rises to a height of 34m in its N part. A light is shown from its NE extremity. This island forms part of the SE side of Bufjorden and encompasses an area of the mainland coast which is indented by many inlets and fronted by numerous off-lying islets and isolated dangers.

Stangholmen Light (58°18'N., 8°36'E.) is shown from a

structure standing on the S end of the southernmost of a group of islets, 3.2 miles NE of Homborsund Light. A prominent beacon, 3m high, stands on a rocky shoal, 0.7 mile SSW of the light.

Grundsetta (58°15'N., 8°33'E.), a detached shoal patch, lies about 1.4 miles SE of Stangholmen Light. It has a least depth of 11.5m and forms the outermost danger in this vicinity.

Grosfjorden (58°19'N., 8°35'E.) extends about 2.3 miles NNE from a position located about 1 mile NE of Bjoroya Light. The entrance to this fjord is narrow and encumbered by numerous rocks, islets, and shoals. It has depths of 9 to 15m, but inside the fjord the depths increase to over 50m. Vikkilen, the continuation of Grosfjorden to the N of Grimstad, is relatively free of dangers and has depths up to 30m.



Grimstad

1.21 Grimstad (58°20'N., 8°36'E.), a small port, is situated in a cove on the W side of Grosfjorden, 3 miles NNE of Bjoroya Light. It is also a summer resort and boat building center.

Tides—Currents.—The rise and fall of the tide is minimal. Currents within the harbor are insignificant. Ice is generally negligible, except during especially severe winters when the harbor may freeze over for short periods.

Depths—Limitations.—Numerous narrow channels lead between the off-lying islets and rocks into the fjord. The main entrance route is from the S, passing ENE of Knatten and E of Bjoroya. It has a controlling depth of 14m.

The port provides about 500m of commercial quayage. Vessels up to 60,000 dwt, 200m in length, and 9.2m draft can be accommodated. For more berthing information see the table titled **Grimstad—Berthing Information**.

Grimstad—Berthing Information		
Berth	Length	Remarks
North	90m	General cargo.
South	70m	General cargo.

Aspect.—A prominent church, yellow with a dark green roof and gray spire, stands in the town.

Homborsundsfald (58°28'N., 8°31'E.), a mountainous pla-

teau, stands about 8 miles NNW of Grimstad. The steep slope at its E end is very conspicuous from S.

Pilotage.—Local knowledge is required. Pilots are available from the stations at Arendal and Kristiansand. They may be contacted by VHF and board about 1.5 miles ESE of Torungen Light (58°24'N., 8°48'E.). Vessels should send an ETA and arrange pilotage services through Oslofjorden 24 hours in advance (see paragraph 1.1). Vessels should also send an ETA to the port through their agent 24 hours, 12 hours, and 6 hours in advance.

Contact Information.—See the table titled **Grimstad—Contact Information.**

Grimstad—Contact Information	
Pilots	
VHF	VHF channels 13 and 16
Telephone	47-33-034-954
Port	
Telephone	47-37-250-169
Facsimile	47-37-049-522
E-mail	havnekontoret@grimstad.kommune.no

Anchorage.—The main anchorage is within Vikkilen, the continuation of Grosfjorden above the harbor. There are depths of 30 to 40m in the S part and 10 to 15m in the N part.

1.22 Hesnesbregen Light (58°18'N., 8°40'E.) is shown from a tripod structure, 14m high, standing on the southernmost of a group of shallow rocky shoals, 2.3 miles ENE of

Stangholmen Light. These shoals form the outermost dangers in this vicinity.

Hesnesoya (58°20'N., 8°39'E.) lies close offshore, 1.5 miles N of Hesnesbregen Light. This island is comparatively low but it stands out against the prominent reddish-brown color of the mainland background, even during periods of poor visibility. Tonneholmen, an islet, is situated close off the E side of Hesnesoya. It is 6m high and marked by a prominent beacon.


An arc of off-lying islets and dangers, which may best be seen on the chart, extends E for about 1.5 miles from Hesnesoya and then continues NNE for 5 miles into the S approaches to Arendal.

Sandoddryggene, with depths of 2.7 to 8m, lies about 2.2 miles ENE of the E side of Hesnesoya. This shoal bank forms the outermost danger at the SE side of the arc. Other shoal banks, with rocks awash, lie centered 1 mile and 2.1 miles NNE of Sandoddryggene. Several passages, available to small vessels with local knowledge, lead through the off-lying dangers extending in a NE direction from Hesnesoya.

Numerous channels entered from seaward lead through the off-lying dangers fronting this stretch of coast. In addition, channels branching from the inner passage lead to several small harbors, anchorages, and marinas. However, local knowledge and local large-scale charts are required for navigation in this area.

The main anchorages and harbors situated along this stretch include Bufjord (58°18'N., 8°32'E.) and Fevikkilen (58°22'N., 8°41'E.).

Torungen Light (58°24'N., 8°48'E.), equipped with a racon, is situated 6.8 miles NE of Hesnesbregen Light, in the approaches to Arendal. It is fully described in paragraph 2.2.

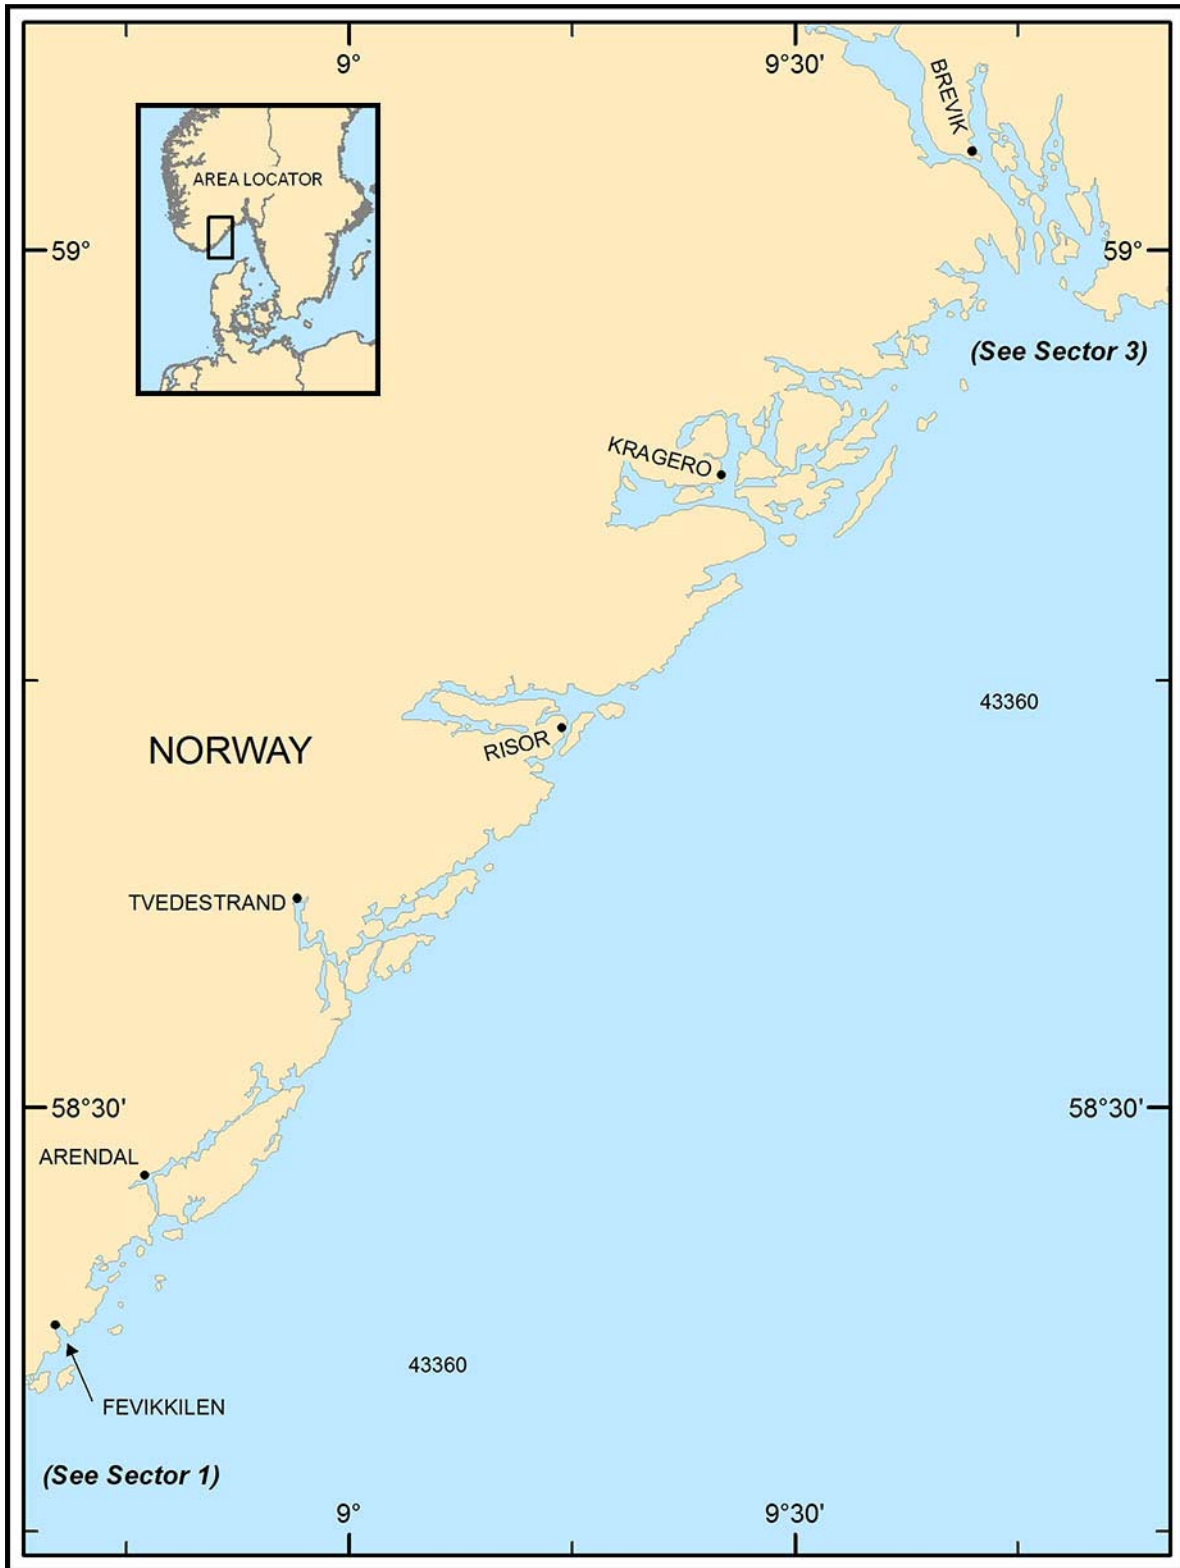

Additional chart coverage may be found in NGA/DLIS Catalog of Maps, Charts, and Related Products (Unlimited Distribution).

SECTOR 2 — CHART INFORMATION

SECTOR 2

NORWAY—SOUTHEAST COAST—ARENDALE TO LANGESUNDSFJORDEN

Plan.—This sector describes the SE coast of Norway for a straight line distance of about 50 miles between the approaches to Arendal and Langesundstangen, the W entrance point of Langesundsfjorden. The description is SW to NE.

General Remarks

2.1 The SE coast of Norway between Arendal and Langesundsfjorden is primarily a monotonous succession of level land and unremarkable, rounded hills. The coast is less irregular than that extending SW from Arendal to Lindesnes and the off-lying islands, islets, and rocks tend to be situated closer inshore. These dangers decrease in number to the NE.

Natural landmarks and distinguishing features are few and widely separated. Those more easily observed by vessels navigating off the coast include the three mountain peaks of Tromlingene (58°38'N., 8°38'E.), the irregular ridge of Hovdefjell (58°42'N., 8°40'E.), and the elongated island of Jomfruland (58°51'N., 9°36'E.).

An inner passage, available to small vessels with local knowledge, leads between the mainland coast and the archipelago of off-lying islands and islets, which is known as Skjaergarden. The passage from Arendal to Lyngor (58°38'N., 9°09'E.) is generally quite deep and sheltered, except in the area of Flostaoya (58°51'N., 9°36'E.), where the route is more exposed. From Lyngor to Langesundsfjorden, the inner passage is exposed for considerable stretches, except in the area of Jomfruland (58°51'N., 9°36'E.).

Pilotage.—The waters and ports described in this sector lie within the Oslofjorden (Horten) Pilot Booking Center Area, which extends E from Egersund (58°27'N., 6°00'E.) to the Swedish border. All vessels must send an ETA and arrange pilotage services through Oslofjorden Pilot Booking Center at least 24 hours prior to arrival. The practice of requesting pilots through the local stations has been discontinued. For further details, see paragraph 1.1 and Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

The Norwegian Pilot Guide

<https://dnl.kartverket.no>

Regulations.—Sea Safe Net (SSN) is a mandatory reporting system operated by the Norwegian Coastal Administration for all vessels entering Norwegian ports. For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

Special recommendations concerning routes apply to tankers of 40,000 dwt and over navigating along the coast and are described in paragraph 1.1.

Vessel Traffic Service.—NOR Vessel Traffic Service (NOR VTS) is in operation for vessels transiting the Norwegian Economic Zone (NEZ) from the Norway/Sweden border in the S to the Norway/Russia border in the N. The NEZ also includes the

areas around Svalbard and Jan Mayen Island. For further information, see paragraph 1.1.

Directions.—From a position located about 4 miles ESE of Torungen Light (58°24'N., 8°48'E.), in the approaches to Arendal, the coastal route leads NE for 20 miles to a position about 6 miles ESE of Lyngor (58°38'N., 9°09'E.). It passes outside the 200m curve and clear of all dangers. The route then continues NE for 20 miles to a position located 7 miles SW of Tvistein Light (58°56'N., 9°56'E.). It passes outside the 100m curve and clear of all dangers. For routes concerning tankers of 40,000 dwt and over, see paragraph 1.1.

An inner passage, available to coasters and small craft, leads between the mainland coast and the archipelago of off-lying islands and islets. However, local knowledge and local large-scale charts are required for navigation along this route.

Caution.—An extensive aerial target firing area lies off much of the coast and extends seaward from the approaches to Langesundsfjorden. In addition, several coastal artillery firing areas are located in the immediate approaches to Langesundsfjorden. Warnings are disseminated by local notice to mariners and coastal radio stations.

Certain areas within the Sorlandet Maritime Defense District are prohibited to navigation. These areas generally lie within 50m of the shore around Hisoy (58°26'N., 8°46'E.), in the approach to Arendal. However, details of the limits should be obtained locally. Photography is also prohibited. For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

The dangers fronting this part of the coast lie about 2 to 5 miles offshore. The outer ones are steep-to and vessels should keep well clear of them in thick weather.

Vessels are advised to stay well clear of the coast during on-shore winds which are often accompanied by fog or mist. These winds influence the current and often cause a strong set toward the land.

Approaches to Arendal

2.2 Torungen Light (58°23.9'N., 8°47.5'E.), equipped with a racon, is shown from a prominent tower, 34m high, standing on Tyre Tourneying, an islet lying in the outer approach to Arendal.

Heksebaen, with a depth of 5.5m, lies about 0.8 mile S of Torungen Light. This shoal patch is the outermost of a group of islets, rocks, and shoals which extend SSW from Ytre Torungen.

A detached rocky shoal, with a depth of 19m, lies about 0.5 mile ESE of Torungen Light and another rocky shoal, with a depth of 19m, lies 0.3 mile NNE of it. These shoals form the outermost dangers lying E of Ytre Torungen.

Lille Torungen Light (58°24.6'N., 8°47.6'E.) is shown from a structure standing on the SE end of Indre Torungen, an islet lying 0.8 mile N of Torungen Light. A conspicuous disused lighthouse, 29m high, is situated in the middle of this islet.

Hagasgrunnen, a shoal patch with a depth of 7.3m, lies about 0.4 mile SE of Lille Torungen Light. Makrelbaen, a detached shoal bank, lies centered 0.5 mile E of Lille Torungen Light. It has depths of 5.8 to 11.9m and is marked by a buoy. Lordsbaen, with a least depth of 7m, is an isolated rocky shoal lying about 0.4 mile ENE of Lille Torungen Light. These shoals form the outermost dangers lying E of Indre Torungen.

Detached rocky shoals, with depths of 2m and 5.7m, lie about 0.2 mile and 0.4 mile, respectively, SSW of Lille Torungen Light and are marked by perches.

Merdoy Light (Merdo) (58°25.5'N., 8°47.6'E.) is shown from a structure standing on the W extremity of an island of the same name lying 0.8 mile NNE of Lille Torungen Light.

Kankene, a group of shallow shoals, lies centered 0.4 mile SSE of Merdoy Light and is marked by a buoy on its SW side.

Sandvikodden Light (58°26'N., 8°47'E.), located 0.8 mile NNW of Merdoy Light, is shown from a structure, 17m high, standing on the W entrance point Galtesundet.



Sandvikodden Light

Directions.—Galtesundet (58°26'N., 8°47'E.) forms the main entrance channel leading to Arendal. This passage separates the island of Hisoy (58°26'N., 8°46'E.) from the W end of the large island of Tromoy. It is approached from SE of Torungen Light. Vessels should proceed NW in the white sector of Lille Torungen Light and pass close NE of Hagasgrunnen. When about 0.4 mile from the light, they should steer NNW toward the range formed by Merdoy Light and Sandvikodden Light. After passing ENE of Indre Torungen, vessels should then continue to adjust their course NW and N in order to pass through Galtesundet.

A secondary entrance channel leads through Tromoyundet (58°30'N., 8°53'E.), a sound about 8 miles long lying between the mainland and the N side of Tromoy. The main seaward approach to this sound is from ENE in the vicinity of Bondon Light (58°31'N., 8°59'E.).

Tromoybrua (58°28'N., 8°49'E.), a suspension bridge, spans Tromoyundet about 1.7 miles E of Arendal and has a vertical clearance of 37m over a width of 100m.

Caution.—Several submarine cables, which may best be seen on the chart, extend seaward from the vicinity of Indre Torungen.

Arendal (58°28'N., 8°46'E.)

World Port Index No. 23600

2.3 Arendal, an industrial and commercial town, stands at the SW end of Tromoyundet, a sound about 8 miles long lying between the mainland and the large, forested island of Tromoy. Several summer resorts are situated in the surrounding area.

Ice.—Ice is seldom a hindrance and, if necessary, the port is kept open by an icebreaker during severe winters.

Tides—Currents.—The tidal currents and water level fluctuation are negligible; the tidal range is approximately 0.3m.

The outflow from the Nidelva River, which enters the sound close WSW of the town, causes a constant ENE set through the harbor area. The greatest outflow occurs with the melting snows of spring or after heavy rainfall. The set may attain a maximum rate of 4 knots but rapidly decreases to relative insignificance about 0.5 mile E of the town.

Depths—Limitations.—The least depth in the entrance channel is 22m. The port provides about 1,000m of main commercial quayage with 27 berths. Vessels up to 75,000 dwt, 260m in length, 40m beam, and 11m draft can be accommodated. For more berthing information see the table titled **Arendal—Berth Information**.

A shipyard, which constructs structures for the offshore exploration industry, is situated at Vindholmen, on the N side of Tromoyundet, 0.6 mile W of the suspension bridge.

A bunkering berth is situated at Steinbukta, close SSW of Sandvikodden Light. Eydehavn Terminal is a multi-purpose deep-water terminal with equipment to handle bulk cargo, project cargo, offshore equipment, and containers. The facility is situated on the N side of Tromoyundet, about 2.2 miles NE of the suspension bridge.

Arendal—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
Arendal Cruise Terminal							
Batterikaia	110m	10.0m	260m	9.0m	32.0m	30,000 dwt	Cruise and bunkers. 39,444 gt.
Hotellkaia	77m	10.0m	260m	9.0m	32.0m	30,000 dwt	Cruise and bunkers. 39,051 gt.
Arendal CSUB Terminal							
CUSB	73m	8.0m	—	—	—	—	Offshore vessels, steel products, and breakbulk.

Arendal—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
AT Skog Eydehavn Terminal							
Timber	110m	7.0m	150m	4.5m	20.0m	8,429 dwt	Breakbulk and bunkers.
Eydeavn Terminal							
Hovedkaia Eydehavn	326m	12.5m	240m	11.0m	40.0m	75,000 dwt	Aggregates, cement, others, salt, containers, offshore, project/heavy cargo, reefer, ro-ro/lo-lo, bunkers, and breakbulk. 17,644 gt and 1,118 tru.
Nymo Eydeavn							
Nymo	150m	10.0m	168.6m	—	25.2m	19,863 dwt	Others, ro-ro/lo-lo, containers, offshore vessels, Shiplift/LASH, project/heavy cargo, breakbulk, bunkers, and reefer. 17,644 gt and 1,118 teu.
Sandvikodden							
Tanker	80m	10.0m	200m	9.0m	32.0m	50,000 dwt	Bio fuel, clean products, and vegetable oil.



Arendal—Southeast Approach

Aspect.—The surrounding terrain is tree-covered with rocky shores. A conspicuous church, white with a dark roof, stands on the seaward side of Tromoy, 3.2 mile NE of Lille Torungen Light. It has no tower but is very prominent from E.

Veden, a prominent hillock 52m high, rises in the SW part of Tromoy, 0.7 mile ENE of Sandvikodden Light.

Pilotage.—Pilotage is compulsory for vessels over 100 tons. Vessels should send an ETA and arrange pilotage services through SAFE SEA NET (SSN), Horten Pilot Booking Center. Oslofjorden can be used, but may require additional charges. Oslofjorden pilots must be contacted at least 24 hours in advance (see paragraph 2.1).



By Ken (Own work) [CC BY 3.0 (<https://creativecommons.org/licenses/by/3.0>)], via Wikimedia Commons
Arendal—Eydehavn smelting facility in the distance



By Knudsens Fotosenter/DEXRA Photo [CC BY 4.0 (<https://creativecommons.org/licenses/by/4.0>)], via Wikimedia Commons

Arendal—Vindholmen Shipyard

Pilots board about 0.7 mile SE of Ytre Torungen (58°23.5'N., 8°48.6'E.). This station also provides pilots for Risor and Grimstad.

Contact Information.—See the table titled **Arendal—Contact Information**.

Arendal—Contact Information	
Pilots	
VHF	VHF channels 13 and 16
Telephone	47-33-034-954

Arendal—Contact Information	
Port	
VHF	VHF channels 12, 13, and 16
Telephone	47-97-527-000
Facsimile	47-37-013-157
E-mail	post@arendalhavn.no
Web site	https://www.arendalhavn.no

Regulations.—Within Galtesundet, N of Sandvikodden Light, and within Tromøysundet, W of the bridge, speed limits of 6 knots apply to deep-sea vessels and 12 knots to pleasure craft. Within the inner harbor area, a speed limit of 6 knots applies to all vessels. This rule does not apply to sea planes when landing or taking off.

Anchorage.—The bay lying 0.7 mile E of Sandvikodden Light provides good anchorage for vessels up to 10,000 dwt. Vessels may anchor, in depths of 15 to 25m, sand and clay, with good holding ground.

Vessels may anchor within a bay, on the N side of Tromøysundet, lying off the E side of Buoya (58°30'N., 8°54'E.). This anchorage has a depth of 34m, clay with good holding ground, but the swinging room is limited.

Vessels may also anchor, in depths of 20 to 25m, anywhere within the inner harbor area, clear of the main channel. There is good holding ground of clay and mud, but local knowledge is advised.

Caution.—Several ferries navigate within the harbor area and its approaches.

Seaplanes land and take off within Tromøysunde.

Several submarine pipelines and cables, best be seen on the chart, extend across the harbor area and its approaches.

Arendal to Risor

2.4 The coast between Arendal and Sildeodden, a mainland point about 18 miles NE, is indented by a series of small inlets. Oksefjorden, the largest of these inlets, forms the most considerable and central of all the indentations within the area. Inland, the terrain in the SW part is mostly flat, becoming progressively higher and more forested to the NE of Arendal.

The mainland shore is sheltered by uninterrupted groups of off-lying islands, islets, and rocks. These dangers are difficult to distinguish from the mainland background because of their generally gray color and low character.

Tromlingene (58°38'N., 8°38'E.), located about 12 miles NNW of Arendal, consists of three conspicuous mountain summits rising in a row. Hovdefjell (58°42'N., 8°40'E.), rising about 4 miles NNE, is a rather irregular ridge somewhat less conspicuous than Tromlingene. In clear weather, both of these landmarks have been observed from a distance of 50 miles.

The outer dangers lying along this part of the coast are steep-to and vessels should stay well clear of them in thick weather. Vessels are also advised to stay well clear of the coast during onshore winds which are often accompanied by fog or mist. These winds influence the current and often cause a strong set toward Tromoy.

Tromoy (58°28'N., 8°58'E.), a large and low island, extends about 8 miles NE and fronts the mainland to the E of Arendal. Its SE side is indented by several inlets and fronted by numerous dangers, which may best be seen on the chart.

Alvekilen (58°28'N., 8°53'E.), a narrow inlet, indents the SE side of Tromoy and provides anchorage for small vessels, in a depth of 7m, mud and sand. Local knowledge is advised.

Batstangen, a low and light-colored point, is located on the S side of the entrance to this inlet.

Tallaken, a detached rocky shoal patch, lies about 0.5 mile SSE of Batstangen and has a least depth of 1.8m. Ravnasknatten, another detached shoal patch, lies about 0.7 mile E of Batstangen and has a least depth of 7.9m. These shoals form the outermost dangers in the approach to Alvekilen.

Brenningane, a shoal bank, lies about 1.2 miles NE of Batstangen at the N end of a group of rocky patches. It has rocks, awash, and is marked by a beacon, 2m high.

2.5 Bonden Light (58°31'N., 8°59'E.) is shown from a structure standing on the NW edge of a rocky shoal lying about 0.7 mile from the mainland coast. A beacon is situated close to the light.

Numerous islets, rocks, and shoals, which may best be seen on the chart, front the seaward side of this light and extend up to about 1.2 miles NE, 0.7 mile SE, and 1.5 miles SSW of it.

Gitmertangen, the NE extremity of Tromoy, is located 1.3 miles SW of Bonden Light and is marked by a light.

Dybingsbaen, a detached shoal patch, lies about 1.4 miles S of Gitmertangen. It has a least depth of 3.3m and is marked by

a buoy. Rosbaen, a rocky shoal, lies about 0.3 mile ENE of Dybingsbaen. It has a least depth of 0.9m and is marked by a perch.

Tromsoysundet, the sound extending SW to Arendal, is entered close N of Gitmertangen. Skinnfelltangen Light, located 0.3 mile NNW of Gitmertangen, is shown from the N entrance point of the sound. An approach route from seaward leads in a N direction between the E side of Tromoy and Dybingsbaen. It continues in a NNE direction, passing W of the dangers lying S of Bonden Light, and rounds Gitmertangen.

Bondedybet, which forms the main approach from seaward, is entered about 2.5 miles NE of Gitmertangen. This channel leads in a SW direction through the off-lying dangers. The fairway passes close NW of Bonden Light and is indicated by range lights situated in the vicinity of Gitmertangen. Local knowledge is advised.

2.6 Oksefjorden (58°35'N., 9°00'E.), which extends about 5 miles NW, is entered about 2.5 miles NNE of Bonden Light. The entrance of this fjord is fronted by a scattered multitude of islets, rocks, and shoals, which extends NE for about 4 miles from Bonden Light and may best be seen on the chart. Most of the outer submerged dangers are steep-to and lie unmarked except for the breakers that occur over them.

Oksefjorden Light (58°33.7'N., 9°00.3'E.) is shown from a structure standing on the E end of an islet, which lies 2.4 miles NNE of Bonden Light and forms the W entrance point. The E entrance point of the fjord, located 0.4 mile NNE of this islet, is formed by the S extremity of Boroya.

Tverrdaloy Light is shown from a structure standing on Holmesundsodden, 0.3 mile SSW of Oksefjorden Light.

Kilsund Light (58°33.0'N., 8°59.5'E.) is shown from a structure standing on the NE end of Flostaoya, 0.4 mile SSW of Tverrdaloy Light.

Ice.—Ice is frequent and the inlet may be closed from March to April in severe winters.

Tides—Currents.—The tidal rise is small. The tidal current usually sets S in the winter, except during E gales. In the summer, the current sets N in the morning and S in the afternoon.

Directions.—From a position located about 1.5 miles NE of Bonden Light, the main approach from seaward to Oksefjorden leads NW through the off-lying dangers, using the white sector of Kilsund Light. From a position located about 0.2 mile SE of Kilsund Light, the route continues NNE toward the entrance of the fjord, passing close ESE of Tverrdaloy Light. The route then rounds Oksefjorden Light and leads in mid-channel through the inlet.

2.7 Tvedestrand (58°37'N., 8°56'E.), a small harbor, is located within a cove at the head of Oksefjorden. It is used mostly by fishing boats, pleasure craft, and local timber vessels.

Tvedestrand—Berth Information					
Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Beam	
No. 1	28m	7.4m	—	—	Fishing vessels, breakbulk, and bunkers.

Tvedestrand—Berth Information					
Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Beam	
No. 2	35m	—	16.7m	5.5m	Ro/pax, fishing vessels, breakbulk, and bunkers.

Depths—Limitations.—The main commercial quay, Kom-munekaien, is situated at the SW side of the cove.

The quay is used by fishing vessels. Vessels up to 16.7m in length and up to 5.5m beam can be accommodated.

For more berthing information see the table titled **Tvedestrand—Berth Information**.

Pilotage.—Pilotage is compulsory. Pilots are provided by the station at Arendal. Vessels should send an ETA and arrange pilotage services through Oslofjorden 24 hours in advance (see paragraph 2.1).

Anchorage.—Small vessels can anchor in the outer harbor, in a depth of 14m, good holding ground, with stern moorings.

General anchorage, in depths of 17 to 30m, with good holding ground, may be found off several coves throughout Oksefjorden. Local knowledge is advisable.

General anchorage, in depths of 18 to 53m, soft bottom, good holding ground, may be found throughout Havefjorden (58°35'N., 9°02'E.), a fjord entered about 1 mile NNE of Oksefjorden Light.

Caution—It has been reported that seven hydrophones have been deployed to a depth of 2.5m. The reported positions of these hydrophones are, as follows:

- 58°35.75'N, 8°57.27'E.
- 58°35.76'N, 8°56.93'E.
- 58°35.82'N, 8°56.98'E.
- 58°35.92'N, 8°56.88'E.
- 58°36.03'N, 8°56.86'E.
- 58°36.19'N, 8°56.77'E.
- 58°37.16'N, 8°56.28'E.

Mariners should take care to avoid these obstructions.

2.8 Sildeodden (58°40'N., 9°12'E.), a mainland point, is located about 9 miles NE of the entrance to Oksefjorden. The coast between is characteristically irregular. It is fronted by several large islands and a number of smaller islands which may best be seen on the chart. These islands are generally lower than the mainland and tend to blend in with the background. However, the openings separating the islands are very distinguishable from seaward.

The outer sides of the islands are fronted by numerous islets, rocks, shoals, and reefs which extend up to about 1.2 miles offshore. Several deep passages lead from seaward through these dangers.

Torskbaen (58°35'N., 9°06'E.), the outermost danger, is a narrow submerged reef which lies parallel to the shore and is about 4.5 miles long. It is located about 1 mile offshore and is marked by breakers during heavy seas.

Persknatten (58°39'N., 9°13'E.), a detached shoal patch, lies about 1 mile SSE of Sildeodden and has a depth of 19.8m. Fidjebaen, a large shoal bank, lies 1.2 miles ENE of Sildeodden. It has a least depth of 7.9m and is marked by a buoy. These shoals form the outermost dangers in this vignette.

Lyngor Light (58°38'N., 9°09'E.) is shown from a promi-

nent building with a tower, 17m high, standing on the S end of Kjeholmen, a small island lying 2.5 miles SW of Sildeodden.



By Peulle (Own work) [CC BY-SA 4.0 (<http://creativecommons.org/licenses/by-sa/4.0/>)], via Wikimedia Commons

Lyngor Light

The inner passage, available to coasters and small craft, leads through the archipelago of off-lying islands. However, local knowledge and local large-scale charts are required for navigation along this route. The channels are narrow in places but generally quite deep.

Numerous passages lead from seaward through the off-lying dangers to the many inlets indenting this stretch of coast. In addition, channels branching from the inner passage lead to several small harbors, anchorages, and marinas. The main anchorages and harbors lying within this archipelago include the following:

- Lyngor (58°38'N., 9°08'E.).
- Krakovag (58°37'N., 9°02'E.).
- Dypvagkilen (58°38'N., 9°04'E.).
- Ostre Askeroy (58°37'N., 9°06'E.).
- Vestre Askeroy (58°36'N., 9°03'E.).
- Vollen (58°39'N., 9°09'E.).
- Klaholmen (58°36'N., 9°05'E.).

2.9 Sandnesfjorden (58°42'N., 9°12'E.), entered about 2.3 miles NNE of Sildeodden, extends about 5 miles WSW from its entrance. This narrow and wooded fjord is quite deep throughout, except in the W part. The entrance is encumbered by several islands, islets, and rocky shoal patches.

Store Furuoy, a small and hilly island, lies in the approaches; entrance passages lead N and S of it. Anchorage is available, in depths of 10 to 30m, mud, good holding ground, within several small coves which indent the sides of this fjord. Local knowledge is required.

Sondeledfjorden (58°44'N., 9°11'E.), about 5 miles long, lies 2 miles N of Sandnesfjorden and has high, wooded shores.



By Peulle (Own work) [CC BY-SA 4.0 (<http://creativecommons.org/licenses/by-sa/4.0/>)], via Wikimedia Commons

Stangholmen Light

This fjord, which is about 1 mile wide, is divided into two parts by the island of Barmen. Nordfjorden, the N part, is deep and relatively unencumbered. Sorfjorden, the S part, is deep but encumbered by several islets and numerous shoal patches. Its E end is obstructed by a low bridge which connects Barmen to the mainland.

Stangholmen Light (58°42'N., 9°14'E.) is shown from a structure standing on the NE side of Store Stangholmen, a small island lying about 1.3 miles NNE of the S entrance point of Sandnesfjorden. A former lighthouse building is situated close to the light.

Risor (58°43'N., 9°14'E.)

World Port Index No. 23630

2.10 Risor is situated at the E end of the promontory which separates Sandnesfjorden from Sondeledfjorden. The harbor is sheltered by a number of small islands and islets, but is exposed to the S.

Ice.—The harbor is free of ice except during very severe winters.

Tides—Currents.—The tides and currents are negligible.

Depths—Limitations.—The harbor can be approached from E through Gronholmgapet (58°44.5'N., 9°20.0'E.), but this passage is tortuous and narrow. The main approach is from S via Stangholmgapet. Vessels proceed NNW, using the white sector of Stangholmen Light, and then pass close E of Store Stangholmen. They continue N to the harbor using a lighted range.

There are two main commercial facilities. For more berthing information see the table titled **Risor—Berth Information**. Vessels up to 10,000 dwt and 8.5m draft can be accommodated.

Aspect.—Risor Flekk, located close E of Risor, is a conspicuous white patch, situated high up on the face of a rocky wall, which can be distinguished from a considerable distance to seaward. A conspicuous building stands on a small promontory in the N part of the harbor. The town is prominent because the

majority of the houses are painted white.

Risor—Berth Information			
Berth	Length	Depth	Remarks
Risor Terminal			
Dampskipbrygga	112m	5.1-7.3m	19 berths around inner harbor.
Kranfjorden	90m	9.5-12.5m	—

Pilotage.—Pilotage is compulsory for vessels over 100 tons. Pilots are provided by the stations at Langesund (Brevik), Arendal, and Kristiansand. Vessels should send an ETA and arrange pilotage services through Oslofjorden 24 hours in advance (see paragraph 2.1 and paragraph 2.3). Vessels should also send an ETA through the agent to the port 24 hours, 12 hours, and 6 hours in advance. Vessels should contact the pilot by VHF 2 hours prior to arrival.

Regulations.—A speed limit of 7 knots applies in the approaches within Store Stangholmen; a speed limit of 4 knots applies in the inner part of the harbor.

Anchorage.—Anchorage is available, in depths up to 45m, within the outer part of the harbor, but this roadstead is exposed to S winds. Sheltered anchorage is available, in a depth of 29m, within Kranfjorden, about 0.7 mile NW of Risor.

Caution.—During gales from S, the sea sometimes breaks across the narrow part of Stangholmgapet and entry is not possible.

Risor to Langesundsfjorden

2.11 Between Risor and Langesundsfjorden, about 25 miles NE, the mainland is somewhat exposed to the open sea. The coast is indented by two rather extensive inlets which trend through a hilly but generally level terrain. These inlets, which are fairly deep throughout, are fronted by numerous off-lying islands, rocks, and shoals.

Jomfruland (58°51'N., 9°36'E.), lying about midway along this section of the coast, is about 4 miles long and one of the outermost islands. Although low and mostly flat, this island is very distinctive.

Jomfruland Light is shown from a prominent tower, 31m high, standing 1.5 miles SSW of the N extremity of the island. A disused light tower is situated near the light; a conspicuous radio mast, 100m high, stands 0.5 mile NNE of it. It is reported that the radio mast no longer exists.

Djupodden Light is shown from a structure standing near the middle of the island. A conspicuous beacon, 12m high, is situated near the SW end of the island, 1.4 miles SSW of this light.

Knubbehausen Light (58°48.8'N., 9°29.2'E.), equipped with a racon, is shown from a column, 12m high, standing on a rock, 4.7 miles SW of Jomfruland Light. Numerous dangers extend SW and NE of this light.

Stromtangen Light (58°50.1'N., 9°28.4'E.) is shown from a building with a tower on the side, 9m high, standing on the mainland, 1.4 miles NNW of Knubbehausen Light.

A mass of islands, islets, and rocky shoals lies between the mainland coast and the W side of Jomfruland. Several chan-



By Alangset [CC BY-SA 4.0 (<https://creativecommons.org/licenses/by-sa/4.0>)], via Wikimedia Commons

Jomfruland Light

nels, available to coasters and small craft, lead through this mass and form part of the inner passage. However, local knowledge and local large-scale charts are required for navigation within this area.

Channels branching from the inner passage route in this area lead to several small harbors, anchorages, and marinas. The main anchorages and harbors lying within this archipelago include the following:

1. Portor (58°48'N., 9°26'E.).
2. Eidskilen (58°50'N., 9°19'E.).
3. Kjolebrunnkilen (58°50'N., 9°17'E.).
4. Kil (58°52'N., 9°19'E.).
5. Skatoy (58°51'N., 9°30'E.).
6. Korset (58°50'N., 9°31'E.).
7. Asvika (58°51'N., 9°29'E.).
8. Lokstadbukta (58°51'N., 9°34'E.).
9. Hovedgard (58°52'N., 9°36'E.).

2.12 Straholmen (58°54'N., 9°39'E.), a low and flat island, lies 1.2 miles NE of the N extremity of Jomfruland and is surrounded by rocks and shallow reefs. Mostein, a whitish-colored conical rock, lies 0.2 mile SE of the S end of this island and is conspicuous from seaward.

Jomfrulandsgapet, a shallow passage, leads between the N end of Jomfruland and Straholmen. The sea breaks across this channel during bad weather.

Svea, a detached shoal bank, lies 1.3 miles S of the S end of Straholmen. It has a least depth of 5m and is marked at the N end by a buoy. Rislebaen, a shoal bank, lies centered about 1 mile ESE of the S end of Straholmen and has a least depth of 4m. These two shoals form the outermost dangers in this vicinity.

Steingrunnen (58°56'N., 9°44'E.), an extensive shoal area, lies about 2.7 miles NE of the N end of Straholmen. It has depths of less than 10m and is marked by a lighted buoy.

Ranheusen (58°56'N., 9°44'E.), a rocky shoal, lies about 0.5 mile NNW of Steingrunnen. It has a least depth of 2m and is marked by buoys. Sasteinsbaen, a shoal bank with a least depth of 13m, lies about 1 mile N of Ranheusen.



By Danckert Monrad-Krohn, Riksantikvaren [CC BY 2.5 (<https://creativecommons.org/licenses/by/2.5>)], via Wikimedia Commons

Stromtangen Light

These shoals lie at the NE end of a chain of islets and rocks, which extends NE for about 3 miles from the N end of Straholmen, and form the outermost dangers along this part of the coast.

Numerous islets, rocks, and shoals lie between this outer chain and the mainland coast. Several winding and narrow channels, approached from N of Ranheusen, lead from seaward through this archipelago to a number of anchorages and small loading places. These passages are available to small vessels with local knowledge. Access to Kragero can be gained via a passage leading through Eksefjorden, Langarsund, and Kjøpmannsfjorden.

Ice occurs in much of these inner waters from January to March, or in severe winters to the end of April, and closes most of the channels. The main anchorages and harbors include the following:

1. Barmskilen (58°56'N., 9°29'E.).
2. Fossing (58°56'N., 9°28'E.).
3. Vagoyfjorden (58°56'N., 9°34'E.).
4. Havsundhamn (58°56'N., 9°37'E.).
5. Bjornoybukta (58°58'N., 9°39'E.).

2.13 Kragero (58°52'N., 9°25'E.) (World Port Index No. 23640), a small port, is situated on the W side of Berofjorden. The town stands on the mainland coast about 4 miles NW of Knubbehausen Light. The harbor is well sheltered by the islands and islets lying W of Jomfruland.

Ice.—Ice forms over most of the inner waters in the approach to the harbor. However, entry is blocked only during severe winters.

Tides—Currents.—Tidal action is negligible. The offshore currents act under the influence of wind conditions and generally tend to set toward the land. Inshore currents generally set seaward out of the approach channels.

The water level is similarly influenced more by winds than tidal conditions. It rises with W winds and falls with E winds. The highest observed rise of the water level reached during storm conditions was 1.4m.

Depths—Limitations.—The least depth in the approach channels is 12.5m. Vessels up to 9m draft can be handled. The

port is closed for commercial operation (2022).



Kragero

Steamboat is the main quay with a length of 90.9m and 7.2m alongside. An automobile ferry berth provides ro-ro facilities on the Steamboat quay. Stillnestangen Berth is located at the N end of the harbor. Jernbanekaien Berth is located about 0.4 mile SSW of Stillnestangen Berthe. Malmhella Hyperite Berth, located 0.3 mile NW of Stillnestangen Berth. There are also several additional berths for small coasters and fishing vessels.

Pilotage.—Pilotage is compulsory for vessels over 50 gt. Pilots are provided by the station at Langesund. Vessels should send an ETA and arrange pilotage services through Oslofjorden 24 hours in advance (see paragraph 2.1). Vessels should also send an ETA through their agent to the port at intervals of 24 hours, 12 hours, and 6 hours prior to arrival. Vessels should contact the pilot by VHF channel 16 and 13 or telephone 2 hours prior to arrival.

Regulations.—When passing the outer approach lighted buoy, moored 1 mile SE of Knubbehausen Light, all vessels should give a general safety message on VHF channel 12, stating their name, position, and intended route.

Contact Information.—See the table titled **Kragero—Contact Information**.

Kragero—Contact Information	
Port	
VHF	VHF channels 12, 13, 14, and 16

Kragero—Contact Information

Telephone	47-35-931-000
E-mail	post@kragero-havnevesen.no

Anchorage.—The main anchorage is in depths of 16 to 29m, good holding ground, within a bay lying close SSE of Stillnestangen Berth.

Directions.—The main approach to the harbor from seaward is from SE through Stanggapet (58°48.8'N., 9°29.4'E.). The entrance to the channel is reported to be marked by a lighted buoy moored about 1 mile SE of Knubbehausen Light. The narrow fairway leads through the off-lying dangers and continues NNW and NW between the mainland coast and the islands and islets lying W of Jomfruland. Local knowledge is required.

Langesundsfjorden


2.14 Langesundsfjorden (58°59'N., 9°45'E.), also known as Grenland Harbor, is entered about 7 miles NE of the N end of Jomfruland. The offshore area between first consists of a concentration of larger islands sheltering Kragero and then a scattering of islets and shoal extending NE in a series of almost parallel rows. The number of islets and shoals decreases to the NE then ceases altogether near Store Sastein (58°58.0'N., 9°42.4'E.), a reef-fringed island lying on the W side of the approach to Langesundsfjorden. Langesundsfjorden is further described beginning in paragraph 3.2

Mejulen (58°58'N., 9°42'E.), a gray islet, lies on the reef, 0.5 mile SW of Store Sastein, and a light is shown from its W side. A wide marble stripe runs from the summit of this islet down to the sea and is very conspicuous.

Abyfjorden (58°59'N., 9°42'E.) and Rognsfjorden (59°00'N., 9°43'E.) are entered 0.9 mile NNW and 1.4 miles NNE, respectively, of Store Sastein. These fjords, which lie on the W side of the entrance to Langesundsfjorden, are used only by local small craft and have no commercial significance.

Langoytangen Light (58°59.4'N., 9°45.5'E.) is shown from the S end of Langoy, in the entrance to Langesundsfjorden, and is described in paragraph 3.2.

Tvistein Light (58°56'N., 9°56'E.), equipped with a racon, is located 9 miles NE of the N end of Straholmen, at the SE side of the approach to Langesundsfjorden, and is described in paragraph 3.9.

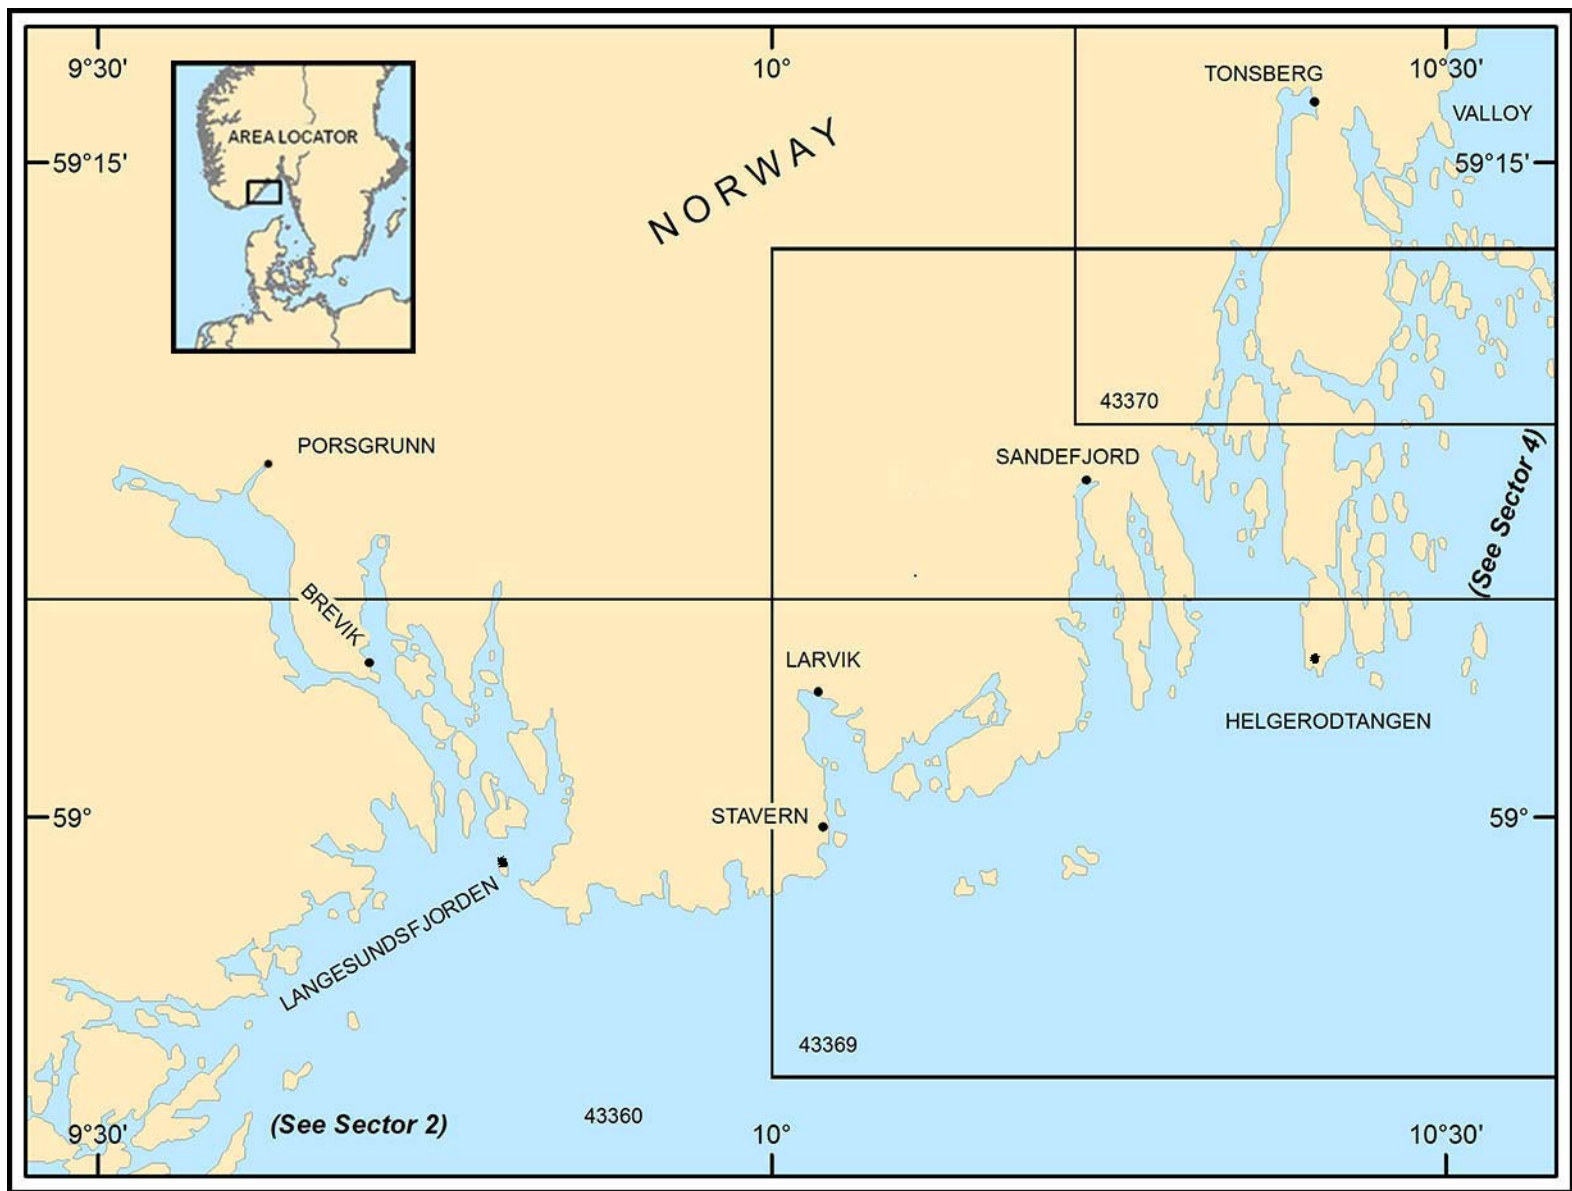

Additional chart coverage may be found in NGA/DLIS Catalog of Maps, Charts, and Related Products (Unlimited Distribution).

SECTOR 3 — CHART INFORMATION

SECTOR 3

NORWAY—SOUTHEAST COAST—LANGESUNDSFJORDEN TO TONSBERGFJORDEN

Plan.—This sector describes the SE coast of Norway for a distance of about 21 miles between Langesundsfjorden and Helgerodtangen, which is the S extremity of Tjome and the W entrance point of Oslofjorden. The descriptive sequence is from W to E.

General Remarks

3.1 Between Langesundsfjorden and the entrance to Oslofjorden, about 21 miles NE, the coast is deeply indented and many dangers lie up to 4 miles offshore. The coast in this area has several deep indentations; from W to E the principal ones are Langesundsfjorden, Larviksfjorden, Sandefjorden, Tonsbergfjorden, and Oslofjorden.

The main ports are Langesund, Brevik, Porsgrunn, and Skien in Langesundfjorden (Grenland Harbor); Larvik, in Larviksfjorden; Sandefjord at the head of Sandefjorden; and Tonsberg, at the head of Tonsbergfjorden.

There is no continuous inner passage extending along this stretch of coast. Between Larviksfjorden and Tonsbergfjorden, the dangers fronting the coast are separated from the shore by areas of comparatively open water. Two inner passages, used by vessels with local knowledge, lead through these areas.

Aspect.—Stavernsadlen (59°03'N., 9°58'E.), standing 2.1 miles WSW of Larvik, is 222m high. This prominent hill has a deep cleft in the middle which is most apparent from SW.

Lovesnyta (59°08'N., 10°02'E.), with a prominent rocky summit, rises about 5 miles NNE of Stavernsadlen. This hill is 227m high and resembles a haystack.

Kjerringfjell (59°02'N., 10°12'E.), 116m high, stands near the coast on the W side of the entrance to Sandefjorden. This prominent hill is steep on its W side but appears to have a gradual slope when seen from SW. When seen from SE, at a distance of 16 to 20 miles, a deep cleft can be observed in the middle of the hill, just above the horizon.

The Norwegian Pilot Guide

<https://dnl.kartverket.no>

Pilotage.—The practice of requesting pilots through local stations has been discontinued. For the waters and ports described in this sector mariners must arrange for pilots electronically using Safe Sea Net (SSN). Alternately, pilots may be ordered directly through the Horten Pilot Booking Center by facsimile, telephone, or VHF channel 13 stating the following International Maritime Organization (IMO) Ship Reporting System (SRS) items: ALPHA, HOTEL, INDIA, OSCAR, PAPA, UNIFORM, and X-RAY (including the reason for call and whether one or two pilots are required). Be advised the use of the Pilot Booking Center as opposed to SSN may incur additional charges.

All vessels must send an ETA and arrange pilot services 24 hours prior to arrival. Vessels should send confirmation for pi-

lots at least 2 hours before arrival to the Horten Pilot Dispatch Center by telephone or VHF channel 13, stating the following IMO SRS items: ALPHA and HOTEL.

For further details, see paragraph 1.1 and Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

Regulations.—Sea Safe Net (SSN) is a mandatory reporting system operated by the Norwegian Coastal Administration for all vessels entering Norwegian ports. For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

The entry of foreign commercial vessels into the inner (internal) waters of Norway is restricted and certain regulations and procedures apply. For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

Special recommendations, concerning routes, apply to tankers of 40,000 dwt and over navigating along the coast; for further information, see paragraph 1.1.

Vessel Traffic Service.—NOR Vessel Traffic Service (NOR VTS) is in operation for vessels transiting the Norwegian Economic Zone (NEZ) from the Norway/Sweden border in the S to the Norway/Russia border in the N. The NEZ also includes the areas around Svalbard and Jan Mayen Island. For further information, see paragraph 1.1.

Directions.—From a position located about 10 miles SSE of the entrance to Langesundsfjorden, the coastal route leads ENE for about 25 miles to a position located at the entrance to Oslofjorden, 3 miles SSE of Faerder Light (59°04'N., 10°31'E.). It stays outside the 100m curve. For routes concerning tankers of 40,000 dwt and over, see paragraph 1.1.

Caution.—For information concerning Dangerous Wave Areas lying off this stretch of coast, see paragraph 1.2.

Langesundsfjorden

3.2 Langesundsfjorden (59°00'N., 9°48'E.), a large area of deep inlets indenting the mainland, is also known as Grenland Harbor. The area is entered between Store Sastein (58°58.0'N., 9°42.4'E.), a reef-fringed island, and Fugloya (58°57.9'N., 9°48.3'E.), a steep-to island lying 3 miles ENE.

Langesundbukta, the body of water lying S of the entrance to Langesundsfjorden, is entered from seaward between Steingrunnen (58°56'N., 9°44'E.), an extensive shoal area, and the dangers fronting the mainland coast, about 4 miles ENE.

Skjeregga, a narrow islet lying on a rocky reef, is located 1.7 miles W of Fugloya and forms the outermost danger in the entrance.

Langesundfjorden has an irregular shape and extends for about 12 miles. The entrance is divided into four channels by the large islands of Langoya (58°59.0'N., 9°45.4'E.), Geitroya (58°59.0'N., 9°46.5'E.), and Aroya (58°59.0'N., 9°48.1'E.), as follows:

1. Langesund Channel leads between the mainland and



By Marius Kallhardt (originally posted on Flickr as *Norwegen 06*) [CC BY-SA 2.0 (<https://creativecommons.org/licenses/by-sa/2.0/>)], via Wikimedia Commons

Langoytangen Light

the W side of Langoya. It provides access to Langesund Harbor.

2. Gamle Langesund Channel leads between Langoya and Geitroya but is almost completely obstructed by shoals.

3. Dypingen Channel, a main passage, leads N between Geitroya and Aroya. It continues NNW via Kjortingeng Channel (59°00.5'N., 9°46.5'E.), which passes between the NE side of Geitroya and Kjortingeng, a small islet lying on foul ground. The channel then leads into Brevikfjorden (59°01.2'N., 9°45.0'E.) which continues NW to Brevik.

4. Kaven Channel, a main passage, leads E through Helgerfjorden (58°59.5'N., 9°49.0'E.), which is entered between the N end of Fugloya and the S end of Aroya. It continues NW through Haoyfjorden (59°01.0'N., 9°48.2'E.) and Kavan (59°02.0'N., 9°46.2'E.). The channel then leads W via Kalvsundet (59°02.6'N., 9°44.5'E.) and joins Brevikfjorden.

Kaven Channel also provides access to the adjacent inlets of Morjefjorden (59°01'N., 9°50'E.), Langangsfjorden (59°04.0'N., 9°47.5'E.), and Ormefjorden (59°03.4'N., 9°45.0'E.). The numerous islands lying between Kalven and Brevikfjorden are separated by passages which are available, for the most part, to small vessels with local knowledge.

Brevikfjorden (59°01.2'N., 9°45.0'E.) is also known locally as Langesundfjorden. This inlet divides at Brevik (59°03'N., 9°42'E.), continuing N into Eidangerfjorden and NW into Frierfjorden.

Brevikstrommen is the narrow passage which leads in a W direction and connects the N end of Brevikfjorden with the S end of Frierfjorden.

The Skienselva River flows into the N part of Frierfjorden. Volls fjorden (59°07'N., 9°33'E.) is the NW continuation of Frierfjorden.

Ice.—Ice occurs throughout Langesundsfjorden during the winter months from January to April and forms first in those areas where the current is weak, mainly in Brevikfjorden, Ormefjorden, and the N part of Kalven. During severe winters, ice may form over the entire inlet for a period of up to two months. Icebreaker service is available. The port of Langesund generally remains ice free.

Tides—Currents.—Generally, the current flow within Langesundsfjorden is most strongly influenced by the fresh water discharge from the rivers. Tides and meteorological conditions also have an affect. Surface currents are brackish to a depth of 1 to 2m and commonly set seaward over a weak in-bound current.

During extreme conditions, the outbound current can reach a velocity of 3 to 4 knots in the narrows between Brevikfjorden and Frierfjorden, while at Kjortingeng, in the entrance to Brevikfjorden (Langesundsfjorden), it still flows seaward with a rate of up to 1 knot. In exceptional cases, an inbound current can predominate, particularly during strong S winds.

Water discharged from the Skienselva River sets S through Frierfjorden toward Saltbua (58°04'.N., 9°38.7'E.), a mainland point, where an eddy forms that sends a weak current N along the E side of the inlet.

The current from the river continues S and enters Brevikfjorden. It sets strongly onto the island of Sandoya where it divides. The N branch flows into Eidangerfjorden and circulates counter clockwise at a velocity up to 3 knots; while the S branch continues seaward, with a strong set, onto the W side of the adjacent islands.

During floods, the outgoing flow in Brevikstrommen can attain a rate of 3 to 4 knots. Off Langesund, the flow attains a rate of 1 knot, but it can be a problem in the narrow passage.

Depths—Limitations.—The entire area of fjords lying within Langesundsfjorden is known collectively as Grenland Harbor. The Grenland Harbor Authority controls all shipping movements within this area.

Within Grenland Harbor, a local Traffic Separation Scheme has been established between the entrance and Brevik (59°03'N., 9°42'E.). This scheme includes Dypingen Channel and Kaven Channel. for further information, see Regulations.

The Grenland Center, based at Brevik, controls the use of these two channels and allocates the routes to be followed by all vessels.

Vessels up to 64,050 dwt, with a maximum length of 229.8m, a maximum draft of 9.9m, and a maximum beam of 33.2m, can be accepted for transit through the channels. For more berthing information see table titled **Langesundsfjorden—Berthing Information**.

The **Brevik Bridge** (59°03'N., 9°42'E.) spans the narrows of Brevikstrommen and connects Brevik to Stathelle. It has a vertical clearance of 45m over a navigable width of 100m.

The Grenland E18 Bridge spans Brevikstrommen about 0.6 mile WNW of the Brevik Bridge. It has a vertical clearance of 50m over a navigable width of 150m.

An overhead cable, with a vertical clearance of 45m, spans

Brevikstrømmen close W of the Grenland E18 Bridge.

Langesundsfjorden—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			Length	Draft	Beam	Size	
Brevik Terminal							
Norcem	130m	10.0m	129.9m	—	23.0m	16,800 dwt	Cement.
Ro-Ro	—	10.0m	229.8m	—	26.5m	15,990 dwt	Ro-ro/lo-lo. Berthing length of 155m (including dolphins).
Tagen	200m	15.0m	151.7m	—	23.4m	13,031 dwt	Coal, bulk cargo, containers, and breakbulk.
Langesund Ferry Terminal							
Ferry	180m	8.0m	—	—	—	—	Fast ferries and ro-ro/lo-lo.
Norcem (Brevik Terminal)							
Norem 1	—	10.9m	175.6m	—	26.0m	33,173 dwt	Cement. Continuous berthing length of 225m.
Porsgrunn							
Dypvannskaia	175m	9.7m	169.7m	—	27.2m	28,189 dwt	Ammonia and others.
Eramet Norway	230m	6.7m	144.5m	—	18.2m	12,004 dwt	Coal, manganese ore, metallurgical coke, and mineral ore.
Krankaia	230m	6.7m	119.3m	—	17.0m	6,796 dwt	Breakbulk.
Tinfos	150m	6.7m	119.3m	—	16.5m	6,796 dwt	—
Skien Harbor Terminal							
No. 1	130m	—	140.6m	—	23.9m	12,638 dwt	Breakbulk and bulk cargo.
No. 2	155m	9.5m	166.1m	—	24.0m	16,522 dwt	Ro-ro/lo-lo and breakbulk. Berthing length of 168m (including dolphins).
Asdaltangen Petrochemical Plant							
Asdaltangen	82m	—	106m	—	16.0m	6,864 dwt	Berthing length of 110m (including dolphins). Clean products, breakbulk, and multipurpose.
Heroya Industrial Park							
Bulkpiren	75m	—	109m	—	18.2m	6,519 dwt	Clean products, fertilizer, and breakbulk.
Hovedkai	372m	—	213.4m	—	32.2m	64,050 dwt	Fertilizer.
Norsk Hydro Main	—	10.9m	213.4m	9.9m	32.2m	63,242 dwt	Chemicals, breakbulk, and multipurpose. Continuous berthing length of 560m.
Oil	50m	—	159.8m	11.8m	25.6m	18,547 dwt	LPG. Berthing length of 85m (including dolphins).
Vestre Kai	174m	—	199.9m	—	32.2m	61,238 dwt	Clean products, bulk cargo, and breakbulk.
Langesund							
Shell Ekstra	68m	—	129.8m	9.5m	19.2m	9,597 dwt	Clean products.
Rafnes							
No. 1 Jetty	65m	12.4m	199m	9.9m	33.2m	42,543 dwt	Berthing length of 240m (including dolphins). Gas capacity of 60,000m ³ .

Langesundsfjorden—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			Length	Draft	Beam	Size	
No. 2 Jetty	44m	10.0m	159.9m	—	24.7m	16,920 dwt	Chemicals gases, chemicals, clean products, crude, LPG, and bunkers. Berthing length of 192m (including dolphins).
No. 3 Jetty	75m	12.0m	142.5m	9.4m	22.0m	14,002 dwt	Chemicals. Berthing length of 108m (including dolphins).

Aspect.—The entrance to Langesundsfjorden itself is distinctive from seaward. The shores of the inlet consist mostly of steep rocky beaches backed by low, undulating, and forested terrain with scattered patches of cultivated land. Neighboring hills rise in gentle slopes and alternate with flat land.

Langoytangen Light (58°59.5'N., 9°45.5'E.) is shown from a prominent tower on a house, 14m high, standing on the S end of Langoy.

A church standing in Langesund, about 0.6 mile NNW of the light, is conspicuous from seaward. It consists of a white structure with a tower and a slate roof.

A conspicuous radar scanner stands at the W side of Fugloya (58°57.9'N., 9°48.3'E.). A light is shown from an islet lying close NNW of the N extremity of this island.

Pilotage.—Pilotage is compulsory for all vessels. Vessels should send an ETA and arrange pilot services through Safe Sea Net (SSN) or alternately, through Horten Pilot Booking Center, 24 hours in advance (see paragraph 3.1). A confirmation message should be sent 5 hours and again when 2 hours prior to arrival at the pilot boarding place.

The pilot boards about 3 miles SSE of Langoytangen Light, in the vicinity of position 58°56.6'N, 9°47.5'E.

Brevik—Pilot Contact Information	
VHF	VHF channels 13 and 16
Telephone	47-33-034-954

Regulations.—The entire complex of Langesundsfjorden lies within the inner (internal) waters of Norway and entry is subject to special regulations. For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

Vessel Traffic Service.—The Grenland VTS zone comprises the waters N of a straight line drawn between position 58°57.9'N, 9°52.1'E, Nevlunghavn Light, and Steinbrotter (58°56.0'N., 9°56.0'E.), continuing along a baseline to position 58°51.8'N, 9°40.0'E. From there it continues W to Jomfruland Light (58°51.8'N., 9°36'.2E.), ending at the S tip of Eksetangen (58°55.5'N., 9°34.8'E.).

Brevik—VTS Contact Information	
VTS	
Call sign	Brevik VTS
VHF	VHF channels 16, 77, and 80

Brevik—VTS Contact Information	
Telephone	47-35-572-610
	47-95-289-332
Facsimile	47-35-572-614
	47-22-410-491
E-mail	brevik.vts@kystverket.no

The VTS is mandatory for all vessels greater than 24m long and/or greater than 50 gt. All ships navigating within the VTS zone shall monitor a common VHF channel.

Vessels carrying dangerous cargo should send an ETA to the Traffic Center at least 24 hours in advance. Such vessels include tankers carrying gas, chemicals, and cargo carried in bulk with a flash point below 23°C; and tankers in ballast but not gas-free.

All vessels should obtain clearance at least 1 hour in advance of entering the area, leaving a quay, or leaving an anchorage within the area. The following details should be stated:

1. Vessel name and call sign.
2. Nationality and name of company.
3. Length, beam, and draft.
4. Height above surface.
5. Gross registered tons.
6. Port of destination.
7. Type of cargo.
8. Amount of dangerous cargo (tons).
9. ETA.
10. ETD.
11. Any further relevant information.

Vessels (underway, anchored, or moored) should maintain a continuous listening watch on VHF channels 16 and 80.

Vessels should obtain permission from the Brevik VTS before anchoring and may be directed to a suitable anchorage.

Vessels should report to the VTS on request, in the event of an accident, and when passing the following points, giving details as shown:

1. When entering the VTS zone:
 - a. Vessel name.
 - b. Time of passing zone limit.
 - c. ETA at quay or anchorage.
2. When arriving at a quay or anchorage:
 - a. Vessel name.
 - b. Time of arrival.
3. When leaving a quay or anchorage:
 - a. Vessel name.

- b. Time of leaving.
- c. ETA at zone limit.
- 4. When leaving the VTS zone:
 - a. Vessel name.
 - b. Time of passing zone limit.

If a report cannot be made by VHF, the Brevik VTS should be contacted by telephone, fax, or through Tjome (LGT) coast radio station.

If visibility is reduced to less than 1 mile, the Sea Traffic Center will restrict the movement of vessels carrying dangerous cargo.

Vessels over 500 gt carrying liquefied gases and vessels over 3,000 gt carrying dangerous cargo in bulk shall have tugs made fast during entry and exit and during maneuvering to and from the quay, mooring, or anchorage in the zone.

Vessels carrying no dangerous cargo but which exceed either a length of 182.9m, a beam of 26.2m, or a draft of 9.9m shall have a tug made fast when underway in an area, the S limit of which is a line extending 045°/245° through Gjermesholmen Light (59°02.8'N., 9°42.5'E.) and the N limit of which is a line extending 270° through Saltbuodden Light.

The Sea Traffic Center can, when it is considered necessary for safety reasons, order any vessel to use a tug or tugs.

Pleasure craft and open boats, regardless of their size, shall, as far as possible, keep out of the way of large vessels and their service craft.

The speed limit within Langesund Channel between Langoytangen Light (58°59.5'N., 9°45.5'E.) and Figgeskjaer Light, 1.4 miles NNW, is 5 knots.

The speed limit within Brevikfjorden between Figgeskjaer Light (59°01'N., 9°45'E.) and Gjermundsholm Light, 2.3 miles NNW, is 8 knots.

The speed limit within Brevikstrommen between Gjermundsholm Light (59°02.8'N., 9°42.5'E.) and Flauodden Light, 1.5 miles WNW, is 5 knots.

Anchoring.—Vessels can anchor only when it is necessary and permission must first be obtained from the Brevik Sea Traffic Center. The Traffic Center, for reasons of safety, may order a vessel to go to a designated anchorage. Generally, anchoring, with a few exceptions, takes place only in the following areas and positions:

1. Helgerofjorden, with distances from Amlirogna Light (58°59.5'N., 9°50.3'E.), as follows:
 - a. Anchorage A—0.6 mile with the light bearing 060°.
 - b. Anchorage B—0.4 mile with the light bearing 046°.
2. Eidangerfjorden: Anchorage C lies N of a line extending E/W from the S point of Orviktangen (59°03.8'N., 9°42.1'E.).
3. Friernaket, with distances from Ringholmen Light (59°05.5'N., 9°37.4'E.), as follows:
 - a. Anchorage D—1.1 miles with the light bearing 192°.
 - b. Anchorage E—1.1 miles with the light bearing 207°.
 - c. Anchorage F—0.9 mile with the light bearing 202°.
 - d. Anchorage G—0.9 mile with the light bearing 212°.
 - e. Anchorage H—0.7 mile with the light bearing

219°.

- f. Anchorage I—0.9 mile with the light bearing 226°.
4. Herrebukta, with distances from Rafnes Quay No. 3 (59°06.2'N., 9°35.4'E.), as follows:
 - a. Anchorage J—0.7 mile with the quay bearing 125°.
 - b. Anchorage K—0.4 mile with the quay bearing 125°.

Caution.—Numerous submarine cables and pipelines lie within Langesundsfjorden and may best be seen on the chart.

Several firing areas for coastal artillery are located along the shores in the approaches to Langesundsfjorden. For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

Langesundsfjorden—Port Facilities

3.3 Numerous small harbors and marinas are located within the Langesundsfjorden area and are used only by fishing vessels, pleasure craft, and local ferries. The principal commercial ports, terminals, and loading berths situated within Langesundsfjorden (Grenland Harbor) are listed below:

1. Langesund (59°00'N., 9°45'E.).
2. Asvall (59°02'N., 9°44'E.).
3. Brevik (59°03'N., 9°43'E.).
4. Porsgrunn (Heroya) (59°08'N., 9°39'E.).
5. Skien (59°12'N., 9°38'E.).
6. Skien Harbour Terminal (59°07.3'N., 9°33.8'E.).
7. Asdalstangen (59°05.0'N., 9°37.7'E.).
8. Rafines (59°06'N., 9°36'E.).

Caution.—Restricted areas, within which navigation is allowed only by prior permission, front the berthing facilities at Heroya (Olje-Nafta), Asdalstangen, and Rafines.

3.4 Langesund (59°00'N., 9°45'E.) is situated along the W side of Langesund Channel. The narrow harbor extends for about 1.5 miles between the mainland and the E side of Langoya. There is a fish processing plant and a ship repair yard. Quays, providing 20 berths, extend along the mainland side of the harbor and have depths of 3.9 to 10.4m alongside. There are facilities for general cargo, ro-ro, and container vessels. Vessels up to 9.1m draft can be handled.

Asvall (59°02'N., 9°44'E.), a fuel terminal, is situated on the SW side of Brevikfjorden (Langesundfjorden), 1.3 miles NNW of Langesund. The berth is 68m long and has depths of 10.6 to 13.2m alongside.

3.5 Brevik (59°03'N., 9°43'E.) (World Port Index No. 23660) stands partly on the mainland and partly on Sylteroya, an island connected to the mainland by a causeway, which lies at the N side of the entrance to Brevikstrommen. The port includes the facilities at Dalbukta and Trosvika, which are situated 0.6 mile NNW and 0.5 mile W, respectively, of Sylteroya.

The port of Brevik extends along the SE shore of the mainland peninsula. It provides 18 berths, with facilities for ro-ro and ferry vessels. The largest is 116m long and has depths of 7.1 to 10.6m alongside. Cargo vessels up to 167m in length and 9.7m draft, and tankers up to 182m in length and 9m draft, can be accommodated.

Dalsbukta provides seven berths. The largest berth, a bulk quay, is situated on the W side of Eidangerfjord. It is 227m



Langesund VTS Boundary

long and has depths of 10.3 to 17m alongside.

Trosvika provides four berths. The deepest berth is 31m long and has depths of 7.6 to 17m alongside. The longest berth is 100m long and has depths of 4.6 to 5.8m alongside.

It is reported that a new coal terminal quay is situated at Brevik. It is 200m long and has a depth of 15m alongside. Vessels up to 275m in length and 14.2m draft can be handled.

3.6 Porsgrunn (Portgrunn) (59°08'N., 9°39'E.) (World Port Index No. 23670) serves an industrial complex. The harbor extends for about 2.5 miles along the banks of the entrance to the Skienselva River. The port also includes the deep-water facilities at Heroya, which is situated on the NE shore of Frierfjorden, 1 mile SW. Porsgrunn with Heroya forms Norway's largest industrial complex.

Depths—Limitations.—Vessels have to pass under the ca-



Brevik



Porsgrunn

ble and bridges spanning Brevikstrømmen, which have a minimum vertical clearance of 45m. A bascule bridge spans the river at Porsgrunn and has a navigable width of 40m. An overhead cable, with a vertical clearance of 45m, spans the lower part of the Skienselva River.

The river channel is dredged to a depth of 10.5m for about 0.4 mile above the mouth and then to a depth of 9.1m for a farther distance of 0.6 mile.

Porsgrunn provides 44 berths. Dypvannskaya, the deepest berth, is 174m long and has depths of 8.7 to 10.2m alongside. Electrometallurgiske's Quay, the longest berth, is 357m long and has depths of 5.1 to 6.7m alongside.

Heroya provides five berths. The main ones include Hovedkaien, the longest berth, which is 560m long and has depths of 9.6 to 13.6m alongside, and Olje-Nafta, the deepest berth, which is 85m long and has depths of 11.5 to 14.7m alongside. Another quay, 174m long, has depths of 7.9 to 9.6m alongside and a ro-ro berth at its head.

The port has facilities for general cargo, ro-ro, tanker, bulk,

and chemical vessels. Vessels up to 100,000 dwt and 10.2m draft can be accommodated at Heroya. For the controlling size limitations in the approaches, see the table titled **Langesundsfjorden—Vessel Limitations** in paragraph 3.2.

Contact Information.—See the table titled **Porsgrunn—Contact Information**.

Porsgrunn—Contact Information	
Port	
VHF	VHF channels 12, 14, and 16
Telephone	47-35-931000

Anchorage.—Three designated anchorage areas for the approaches to Porsgrunn are situated within Frierfjorden, in the vicinity of Frierflaket.

3.7 Skien (59°12'N., 9°37'E.) (World Port Index No. 23680) is situated about 6 miles above the mouth of the Skienselva River, at the head of ocean-going navigation. The harbor extends for about 2 miles along the banks of the river. The port includes Skien Harbor Terminal, which is situated on the N shore of the entrance to Vollsfjorden and is described in paragraph 3.8.

Depths—Limitations.—The bascule bridge spanning the entrance of the river at Porsgrunn has a navigable width of 40m. Overhead cables span the river at various places and have a minimum vertical clearance of 37m. The Menstad Bridge spans the river close below the harbor and has a vertical clearance of 27m over a navigable width of 40m.

The port provides 30 berths. Railway Wharf, the main commercial berth, is 300m long and has depths of 6.7 to 11.9m alongside.

The port has facilities for general cargo, container, and timber product vessels. Vessels up to 85m in length, 14m beam, and 5m draft can be accommodated. Such vessels must be able to pass under the Menstad Bridge.

Aspect.—The entire area along the river, including Skien, is densely built up and backed by hills. A conspicuous church, with two high spires, stands on a hill in the town, N of the river.

Pilotage.—Pilotage is compulsory for all vessels. Pilotage should be ordered electronically through Safe Sea Net (SSN) or alternately through Horten Pilot Booking Center, but may incur additional charges.

The pilot boards vessels about 3.2 miles SSE of Langoytangen Light, in the vicinity of position 58°56.6'N, 9°47.5'E.

Contact Information.—See the table titled **Skien—Contact Information**.

Skien—Contact Information	
Brevik Pilots	
VHF	VHF channels 13 and 16
Telephone	47-33-034-954
Port	
VHF	VHF channels 12, 16, and 80
Telephone	47-35-931-000

Anchorage.—Designated anchorage areas Alpha, Bravo, and Charlie are located, in depths of 20 to 60m, mud, close S of Heroya, in the northernmost section for Frierfjorden.

Caution.—The current within the river is always setting out at varying rates. The tide is almost unnoticeable. During spring floods or after heavy rain storms, the current at the narrows close S of Skien and at Porsgrunn may attain a rate of 7 to 8 knots. This also occurs with melting ice and snow.

Drifting timbers may be encountered within the river.

3.8 Skien Harbor Terminal (59°07.3'N., 9°33.8'E.) is situated at Slevik, on the N shore of the entrance to Volls-fjorden. It is managed by the Port of Skien.

An overhead cable, with a vertical clearance of 37m, spans the entrance to Volls-fjorden.



Skien Harbor Terminal

The terminal provides two concrete quays, 135m long and 165m long, each with a depth of 11m alongside. The quays are separated by a ro-ro berth, with a depth of 13.3m alongside.

Vessels up to 40,000 dwt, 182m in length, 25.9m beam, and 9.9m draft can be accommodated.

Anchorage.—An anchorage area is located, in depths of 24m, mud, approximately 0.65 mile SW of Skien Harbor Terminal and can best be seen on the chart.

Asdalstangen (59°05.0'N., 9°37.7'E.) is situated on the SW shore of Frierfjorden and serves a petrochemical complex. The main berth is 113m long and has depths of 6.9 to 8.9m alongside, with a ro-ro ramp at its SE end.

Rafnes (59°06'N., 9°36'E.), with four berths, is situated on the SW shore of Frierfjorden and serves an extensive industrial area. The main berth is 64m long and has depths 11.8 to 12.3m alongside. It is extended by mooring dolphins. This berth is mostly used by gas tankers.

Langesundsfjorden to Larviksfjorden

3.9 The coast between Langesundbukta, in the approaches to Langesundsfjorden, and the entrance to Oslofjorden, about 25 miles ENE, is deeply indented. Many islands, islets, and rocks front the shore and lie up to about 4 miles seaward. Inland, the low terrain as far as Larviksfjorden (59°00'N., 10°05'E.) consists primarily of barren hills. Because these hills consist of light-gray stone backed by dark groups of trees, they

tend to merge and produce an impression of monotonous uniformity when seen from a distance to seaward.

Nevlunghamn (58°58'N., 9°52'E.), a small fishing harbor, lies on the E side of the hilly peninsula, which forms the E entrance to Langesundsfjorden. This harbor is fronted by numerous islets, rocks, and shoals which extend up to about 1.5 miles S and 1.7 mile SE of it. Four channels lead between the off-lying dangers to the harbor but local knowledge is required. Napa, an islet, lies on a reef, 1.2 miles SSE of the harbor, and is marked by a beacon.

Twistein Light (58°56'N., 9°56'E.), equipped with a racon, is shown from a prominent building with a tower, 11m high, standing on the easternmost of two islets which lie on a shallow reef. A detached shoal bank, with a least depth of 13m, lies about 1 mile WSW of the light and forms the outermost danger in this vicinity.



By Arnstein Ronning (Own work) [CC BY-SA 4.0 (<https://creativecommons.org/licenses/by-sa/4.0>)], via Wikimedia Commons

Twistein Light



By Mahlum (Own work) [Public Domain], via Wikimedia Commons

Svenner Light

Several isolated shoal patches, with depths of less than 20m, were reported to lie up to about 2 miles SE of Twistein Light.

Hummerbakkfjorden (58°58'N., 9°56'E.), a narrow inlet, indents the mainland 2 miles N of Twistein Light. Its W side is steep-to, its E side is foul, and the head is obstructed by a dry-

ing flat. Anchorage is available, exposed to S winds, in a depth of 9m, about 0.5 mile within the entrance of this inlet.

Rakkebane (58°58'N., 10°01'E.), an extensive shallow shoal area, lies 3 miles ENE of Tvistein Light and may best be seen on the chart. It extends S and SSE for about 2 miles from the mainland and is marked on the SE side by a lighted buoy. Several shoal patches, with depths of less than 20m, lie up to about 0.5 mile seaward of the SE end of Rakkebane. In heavy seas the S part of this entire shoal area is covered by breakers.

Svenner Light (58°58'N., 10°09'E.) is shown from a prominent tower, 19m high, standing on an islet within Svennerholmene, a group of low and bare islets lying centered 6.7 miles ENE of Tvistein Light.

Dypeskatan (58°57'N., 10°08'E.), a detached rocky shoal patch, lies about 1.3 miles SW of Svenner Light. It has a least depth of 15m and is marked at the S side by a buoy. Svennerskatan, a shoal bank with a least depth of 2.5m, lies centered 0.7 mile N of Dypeskatan and about 0.9 mile WSW of Svenner Light. These shoals form the outermost dangers in this vicinity.

Larviksfjorden

3.10 Larviksfjorden (59°01'N., 10°04'E.), a deep fjord, extends about 4.5 miles N from its entrance and is relatively free of dangers. The entrance lies between Rakkebaane, on the W side, and the shoals fronting Svennerholmene, on the E side.

Viksfjorden, a large inlet, extends ENE from the E side of the fjord but is mostly obstructed by islets and shoals. The Langen River flows into the NE side of the fjord and the Farriselva River flows into the head.

Stavernsoya (58°58'N., 9°56'E.), an island resembling a cone, lies close off W side of the fjord, 3.2 miles NW of Svenner Light. Stavensodden Light is shown from a prominent building, 8m high, standing on the S end of this island.



By Arnstein Ronning (Own work) [CC BY 3.0 (<https://creativecommons.org/licenses/by/3.0/>)], via Wikimedia Commons

Stavensodden Light

Ramsholmenflua, a detached group of rocks and shoals, lies close off the E side of Stavernsoya, 0.6 mile NE of Stavensodden Light. It is marked by a lighted beacon, 9m high, and a buoy. The group forms the outermost danger in this vicinity.

Molleberget (58°59'N., 10°01'E.), a gray and bare hill, rises

on the mainland about 1 mile SW of Stavensodden Light. It is conspicuous from seaward and may easily be identified against the wooded islets fronting the coast.

3.11 Stavern (59°00'N., 10°02'E.) a small harbor and resort, is situated on the mainland at the W side of the fjord, close NNW of Stavernoia. It is protected by breakwaters and has depths up to 4m. This harbor is used mostly by fishing vessels and pleasure craft.

The war memorial to seaman, a pyramidal building, stands near the mainland shore, about 0.5 mile NW of Stavensodden Light. This structure is usually prominent but can be difficult to identify at times because its gray color blends with the surrounding landscape.



By Torstein Frogner (Own work) [CC BY-SA 2.0 (<https://creativecommons.org/licenses/by-sa/2.0/>)], via Wikimedia Commons

Stavern War Memorial

Oteroya (59°01.8'N., 10°03.7'E.), marked by a light at the SE side, lies at the E side of the fjord about 2.5 miles NNE of Stavensodden Light. It is joined by a causeway to the mainland at the N end.

Small craft harbors are situated in the fjord at Vadskaer (59°02.8'N., 10°02.3'E.) and Ostre Halsen (59°02'N., 10°04'E.).

Tides—Currents.—Generally, currents off the entrance to Larviksfjorden set W and may attain rates of 3 to 4 knots. Currents commonly set seaward through the fjord at rates which vary with the amount of water discharged into the inlet as well as the weather conditions in the Skagerrak.

Pilotage.—Pilotage is compulsory for all vessels. Pilots should be ordered electronically through Safe Sea Net (SSN), or through Horten Pilot Booking Center, though this may incur additional charges. Vessels should send an ETA and arrange pilotage services through Horten 24 hours in advance (see paragraph 3.1).

The pilot boards approximately 1 mile NW of Nord-Hallso Light, in position 58°58.6'N, 11°02.7'E

Caution.—A coastal artillery firing area (Rakke) and an air target firing area overlap in the seaward approaches to Larviksfjorden. Firing exercise warnings are issued locally and/or by patrol craft which may be present.

3.12 Larvik (59°03'N., 10°02'E.) (World Port Index No.

23700), a commercial port and a major ferry port with links to Denmark, is situated at the head of Larviksfjorden and serves as an industrial center.

Port of Larvik Home Page

<https://www.larvik.havn.no/en>

Ice.—Ice only forms in the harbor during long cold spells. It is kept open by icebreakers at such times.



Larvik—Kanalen Cargo Terminal

Depths—Limitations.—The port provides about 1,300m of main commercial berthage. The principal facilities are described in the table titled **Larvik—Berthing Information**.

There are facilities for general cargo, bulk, tanker, ro-ro, and ferry vessels. Vessels up to 25,000 dwt, with a maximum length of 250m and draft of 8.5m, can be accommodated.

Aspect.—The town stands around the harbor area at the head of the fjord and a conspicuous church is situated near its

center. A light, which indicates the entrance fairway, is shown from the corner of a warehouse standing in the NW part of the harbor near the mouth of the Farriselva River.

Pilotage.—Pilotage is compulsory for all vessels. Vessels should send an ETA and arrange pilotage services electronically through Safe Sea Net (SSN) or alternately through the Horten Pilot Booking Center 24 hours in advance (see paragraph 3.1). A confirmation message should be sent 2 hours prior to arrival at the pilot boarding place.



Larvik—Ferry Terminal

The pilots board about 3.2 miles SSE of Langoytangen Light near position 58°56.5'N, 9°47.6'E.

Contact Information.—See the table titled **Larvik—Contact Information**.

Anchorage.—The main anchorage is in depths of 14 to 28m, good holding ground, within Tenvikbukta, the NW part of the harbor area. This roadstead is clear of the entrance fairway and less exposed to S and SW winds.

Larvik—Berth Information						
Berth	Length	Depth	Maximum Vessel			Remarks
			LOA	Draft	Size	
Larvik Canal Terminal						
Kanalkaia N	360m	8.0m	—	—	25,000 dwt	Grain, wood chips, offshore, project/heavy cargo, steel products, and breakbulk.
Kanalkaia W	120m	10.0m	—	—	—	Breakbulk.
Larvik Container Terminal						
Revkaia	270m	11.5m	—	—	—	Containers.
Larvik Ferry Terminal						
Ferry	160m	10.0m	—	—	—	Fast ferries and ro-ro passengers/vehicles/rail. Berthing length of 210m (including dolphins).
Larvik General Cargo Terminal						
Stykkgodskaia	90m	8.0m	—	—	—	Breakbulk.
Larvik Stone Terminal (Svartebukt)						
Stone	68m	8.5m	250m	8.5m	—	Stone. Beam unrestricted.

Larvik—Contact Information	
Pilots	
VHF	VHF channels 13 and 16
Telephone	47-33-034-954
Port	
VHF	VHF channels 12, 14, and 16
Telephone	47-33-165-750
Facsimile	47-33-180-772
E-mail	post@larvik.havn.no
Web site	https://www.larvik.havn.no

Anchorage is available, in depths of 40 to 57m, within Jordebukta (59°01.8'N., 10°01.4'E.), a bay lying on the W side of the fjord.

Caution.—A number of outfall pipelines extend seaward from the N and W shores of the harbor area and may best be seen on the chart. Submarine cable, best seen on the chart, extends S from Larvik.

Larviksfjorden to Tonsbergfjorden

3.13 Sandefjorden (59°05'N., 10°15'E.), lying about 6 miles ENE of Larviksfjorden, extends 5.5 miles N. The fairway is deep but it is narrowed in several places by a number of above and below-water dangers that front both sides of the fjord. The surrounding terrain is mostly low and rolling.

Holskjaer Light (Holtskjer) (59°02.3'N., 10°16.1'E.) is shown from a tripod structure standing on an islet at the E side of the entrance to the fjord, 5.5 miles NE of Svenner Light. A group of islets and shoals lies fronts the E side of the entrance and extends for about 0.6 mile SSE of the light.

Leikarhausen, a detached shoal patch with a least depth of 8m, lies in the approach to the fjord, about 0.9 mile S of Holskjaer Light.

Kvernberget (59°04'N., 10°15'E.), a bare and brownish hill, is located 1.9 miles NNW of Holskjaer Light and is conspicuous from seaward. It rises on a small peninsula which is connected to the shore at the E side of the fjord by a low isthmus.

Sydostgrunden (58°59'N., 10°19'E.), a detached group of rocky shoal patches, lies about 3.5 miles SSE of Holskjaer Light. This shallow danger is frequently marked by breakers. The group is marked on its E and W sides by buoys and on its S side by a lighted buoy.

Norde Bondeskaten (58°59'N., 10°16'E.), a shallow rocky shoal, lies about 1.5 miles W of Sydostgrunden and at the E end of a continuous chain of islets and shoals, which extends

ENE for 4 miles from the vicinity of Svenner Light (58°58'N., 10°09'E.) This chain of dangers may best be seen on the chart. Rauer, a group of low islets lying within the chain, is located 2.5 miles ENE of Svenner Light and is reported to be prominent from seaward.

Skipsleia (59°00'N., 10°14'E.) is the outermost of two inner passages, which lead through the off-lying dangers from Larviksfjorden, across the entrance of Sandefjorden, to Tonsbergfjorden. It is used mostly by coastal vessels with local knowledge. The channel, which lies about 1.5 miles from the mainland shore, is comparatively deep. It passes between the dangers fronting the mainland and the chain of dangers extending ENE from Svenner Light.

Batleia, the innermost passage, is commonly used by small craft with local knowledge. It lies close along the mainland shore.

Meffjorden (59°03'N., 10°17'E.) is entered close E of Sandefjorden. This fjord is encumbered by numerous dangers and is of no commercial significance. It is surrounded by comparatively low terrain which is prominent because it rises steeply from the sea. Vegetation is sparse on the E side of the fjord but somewhat more luxuriant on the W side where coniferous forest is found.

The finger of land separating Meffjorden from Sandefjorden is dark gray, low, rocky, and relatively bare.

Ula (59°01'N., 10°11'E.), a small harbor, is situated on the mainland 3.7 miles WSW of Holskjaer Light. This harbor, which is used by small craft, is protected by a mole and has a quay, with a depth of 3m alongside. The outer part provides anchorage, in a depth of 18m. It is exposed to the S and entry requires local knowledge.

Sandefjord Home Page
http://www.sandefjord.no

3.14 Sandefjord (59°08'N., 10°14'E.) (World Port Index No. 23710), located at the head of Sandefjorden, is a commercial port and ferry terminal which serves a large industrial area.

Ice.—Ice only forms in the harbor during long cold spells. It is kept open by icebreakers at such times.

Tides—Currents.—The tides and currents in the fjord are insignificant. The currents outside the fjord are strongly influenced by wind conditions farther out in the Skagerrak. Generally, they set W and attain maximum rates of 3 to 4 knots.

Depths—Limitations.—The harbor consists of the area lying within 2 miles of the head of the fjord. A number of quays and piers are situated throughout this area.

Sandefjord—Berthing Information					
Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
Sandefjord Terminal					
Framnes Kai 3	210m	16.0m	—	—	Ro-ro/vehicles/rail.
Framnes Kai 4	150m	6.5m	—	—	Ro-ro/vehicles/rail.

Sandefjord—Berthing Information					
Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
Framnes Kai 5	125m	10.0m	—	—	Ro-ro/vehicles/rail, breakbulk, and bunkers.
Thoroya	140m	16.0m	—	—	Ro-ro/vehicles/rail.
Jotun					
Jotun Fabrikker	140m	5.2m	—	5.0m	Chemicals and clean products. There are no dwt limitation.
Olen					
Oleon Langkaia	148m	—	140m	5.5m	Chemicals.
Oleon Olijepiren	20m	—	140m	8.0m	Chemicals.

There are facilities for general cargo, bulk, ferry, ro-ro, and cruise vessels. Vessels with drafts up to 8m can be accommodated. For more berthing information see the table titled **Sandefjord—Berth Information**.

Aspect.—Asnetset Light (59°06'N., 10°14'E., which indicates the fairway leading to the harbor, is shown from a structure standing on the E side of the fjord, 3.7 miles NNW of Holskjaer Light.

Pilotage.—Pilotage is compulsory when navigating within the restricted (inner waters) area. Pilots are provided through Safe Sea Net or alternatively through the Horten Pilot Booking Center, but doing so may incur additional charges. Vessels must send an ETA and arrange pilot services 24 hours in advance (see paragraph 3.1). Pilots may be contacted by VHF on channel 16 and 13.

Pilots generally board vessels about 1.5 miles E of Store Faerder Light, in position 59°04.5'N, 10°34.4'E, or about 3 miles SSE of Langoytangen Light, in position 58°56.6'N, 9°47.5'E.

Regulations.—Vessels must send an ETA to the port through the agent at least 24 hours prior to arrival.

Contact Information.—See the table titled **Sandefjord—Contact Information**.

Sandefjord—Contact Information	
Port	
VHF	VHF channel 14
Telephone	47-33-416-438
	47-90-418-445 (mobile)
E-mail	post@sandefjord.kommune.no
Web site	https://www.sandefjordhavn.no
Pilots	
VHF	VHF channels 13 and 16
Telephone	47-33-034-954

Anchorage.—Anchorage is available, in depths of 6 to 31m, good holding ground, within the harbor to the N of Asnetset Light.

Directions.—The main approach to Sandefjorden from seaward leads NNW between Sydostgrunden and Norde Bond-

eskaten, using the white sector of Holskjaer Light. The route leads ENE of Nordosta, a shoal bank with a least depth of 8m lying 0.7 mile NNE of Norde Bondeskaten, and ENE of Leikarhausen. It then continues NW into the entrance of the fjord passing between Holskjaer Light and Koksundbaen, a shallow shoal marked by a buoy, 0.9 mile WSW.

Caution.—A coastal artillery firing exercise area lies in the approaches to Sandefjorden and Mefjorden. It extends up to 7 miles seaward. Firing exercise warnings are issued locally and/or by patrol craft which may be present.

A number of submarine pipelines and cables lie within the harbor and may best be seen on the chart.

Tonsbergfjorden

3.15 Tonsbergfjorden (59°05'N., 10°22'E.) is entered between the E entrance point of Medfjorden and Skatangen (59°03'N., 10°24'E.), the SW extremity of the island of Tjome, about 3 miles E. This fjord, which extends about 14 miles N, is formed by a mainland peninsula, on the W side, and by the islands of Tjome and Notteroy, on the E side.

The seaward approaches to the fjord are encumbered by a myriad of scattered dangers, which may best be seen on the chart. The middle of the fjord is obstructed by several islands, many islets, and a large number of rocks and shoals.

Rocks and shoals extend S for about 2.5 miles from the S extremity of Tjome.

Tonsberg (59°16'N., 10°25'E.) is situated at the head of the fjord and may be approached from seaward or from Oslofjorden by way of Vrengen (59°10'N., 10°25'E.) or the passage and canal lying N of Notteroy. It is fully described in paragraph 3.18.

The narrowed N part of the fjord, extending 3 miles below Tonsberg, is known as Vestfjorden.

Depths in the main passages leading to the head of Tonsbergfjorden are generally quite adequate for ocean-going vessels.

Ice.—Ice forms in Vestfjorden, the N part of the fjord, and in the passage lying N of Notteroy. The approach from Oslofjorden is kept open by icebreakers.

Tides—Currents.—The direction and rate of the currents in Tonsbergfjorden are somewhat uncertain because they tend to fluctuate under the influence of the “Solgangsver,” a natural, mostly summertime, phenomenon in which the wind blows from the direction of the sun and consequently shifts in direc-

tion as the sun travels from horizon to horizon.

Depths—Limitations.—The least depth in the main approach from seaward to Tonsberg through Tonsbergfjorden is 9m. Vessels with drafts up to 6.4m can use this route. Vessels with drafts up to 7.3m can enter Tonsbergfjorden from Oslofjorden.

Aspect.—Toras (59°04.5'N., 10°24.8'E.), a prominent hill, stands in the S part of Tjome and is 56m high. It appears from seaward as two hills side by side. A conspicuous radio tower is situated 0.2 mile NW of this hill.

Tjome Church (59°06.8'N., 10°23.5'E.) stands in a village 2.5 miles NNW of Toras. Due to its gray color, this church blends in with the land, but from the outer approaches the tower is conspicuous against the skyline.

Tonsberg Tonne Beacon (59°03.5'N., 10°18.6'E.) stands at an elevation of 37m on the W side of the fjord. It is prominent from seaward. Tonsberg Tonne Light and Trubberodden Light are shown from structures situated close S and 0.7 mile NNE, respectively, of this beacon.

Pilotage.—Pilotage is compulsory for all vessels when navigating within the restricted (inner waters) area of Tonsbergfjorden. Pilots are provided through Safe Sea Net or alternatively through the Horten Pilot Booking Center, which may incur additional charges. Vessels must send an ETA and arrange pilotage services through 24 hours in advance (see paragraph 3.1). Pilots may be contacted by VHF and board vessels about 1.5 miles E of Store Faerder Light, in position 59°04.5'N, 10°34.5'E.

Regulations.—Tonsbergfjorden is situated within the Oslofjorden Vessel Traffic Service (VTS) system area. This system is mandatory for all vessels of 24m in length and over and all vessels carrying dangerous cargo. For further details, see paragraph 4.9.

Contact Information.—See the table titled **Tonsberg—Contact Information**.

Tonsberg—Contact Information	
Port	
VHF	VHF channels 16 and 12
Telephone	47-33-354-500
E-mail	tonsberg.havn@tonsberg.kommune.no
Web site	https://www.tonsberghavn.no

Anchorage.—Tjomekjaela, a narrow passage lying on the E side of Tonsbergfjorden, provides roomy anchorage for small vessels, in depths of 15 to 20m, clay, close S of the Ostre Vakerholmen (59°08.0'N., 10°22.4'E.), an islet marked by a light on its E side.

Directions.—The main approach to Tonsbergfjorden from seaward leads initially NNW between Sydostgrunden (58°59'N., 10°19'E.) and Norde Bondeskatén, using the white sector of Holskjaer Light (59°02.3'N., 10°16.1'E.). When about 3.3 miles from the light, the route turns to a NNE direction and leads through the off-lying dangers, using the lighted range located at Barkevik (59°01.1'N., 10°22.8'E.). The route then continues, from a position located about 0.4 mile SSW of the front range light, in a N direction along the E side of the fjord.

Tonsbergfjorden can also be approached, by small vessels

with local knowledge, from the inner passage which leads through the off-lying dangers from Larviksfjorden.

Caution.—A coastal artillery firing exercise area lies in the approaches to Tonsbergfjorden. Firing exercise warnings are issued locally and/or by patrol craft which may be present.

Several submarine pipelines and cables lie within the fjord and may best be seen on the chart.

During stormy weather, the sea breaks over a number of rocky shoals lying within the channels leading through Tonsbergfjorden. At such times, vessels are cautioned not to enter the fjord unless they have accurately determined their position.

3.16 Vrengen (59°10'N., 10°25'E.), the passage leading between the N side of Tjome and Notteroy, connects Oslofjorden to Tonsbergfjorden. This passage, which is narrow and tortuous in places, is mostly used by small vessels with local knowledge in transit between Tonsberg and Oslofjorden.

A fixed highway bridge, which spans the passage 0.5 mile within the W entrance, has a vertical clearance of 33m. Another bridge, located close N of the first one, has a vertical clearance of 28m.

Speed limits are in force within the narrowest parts of the passage. The direction of buoyage in the passage is W to E.

The fairway has several sharp turns and narrows to a width of only 137m in some places.

The currents are generally quite strong in Vrengen and commonly set in a W direction when the current in Oslofjorden is setting to the S. The winds are variable.

Kjopmannskjaer, near the W entrance to the passage, provides berths, some of which are used for lay-up. The largest berth is 45m long and has depths of 6.6 to 9.5m alongside.

The passage can be approached from SE through Leisteinslopet, a channel leading in a NW direction through the off-lying dangers from a position located about 2 miles SE of Leistein Light (59°08.5'N., 10°29.7'E.).

3.17 Huikjela (59°10'N., 10°34'E.) is the principal passage connecting Tonsberg with Oslofjorden. It is the most direct and least encumbered route. The route leads in a NW direction for 6.5 miles through the off-lying dangers from a position located 1.2 miles SW of Hollaenderbaen Light (59°10'N., 10°38'E.). The channel is entered between the islets of Vierskjaera, located 2.6 miles W of the above light, and Store Rauer, 1.2 miles NE.

At the NW end of Huikjela, the route continues through Husoyundet (59°14.5'N., 10°28.0'E.), a passage entered between the NE side of Husoy and the S end of Jersoy (59°14.6'N., 10°28.5'E.). This narrow buoyed passage leads in a WNW direction for 1.5 miles to the E entrance of the Tonsberg Canal. The passage to Tonsberg via this route is limited to vessels with drafts up to 5.5m.

3.18 Tonsberg (59°16'N., 10°25'E.) (World Port Index No. 23720) is located at the head of Tonsbergfjorden. The port serves an industrial area and has a major shipyard.

The harbor area extends along both sides of the passage lying N of Notteroy, which includes the Tonsberg Canal. The port can be approached through Tonsbergfjorden or via passages leading from Oslofjorden.

Depths—Limitations.—A bascule bridge spans the SE part

of the Tonsberg Canal. It has a navigable passage, 26m wide, with a depth of 6.7m. The canal consists of a dredged channel with a least depth of 6.5m.

Several commercial berths are located SE of the bridge; an extensive shipyard occupies the area on the S side of the harbor NW of the bridge. Numerous small craft moorings front the N side of the harbor close W of the bridge.

The shipyard provides a jetty and there are several drydocks within the harbor.

Kanalbrygga, the main commercial quay, is located along the N side of the harbor, SE of the bridge. A ro-ro berth is located close E of this quay.

The port has facilities for general cargo, container, ro-ro, and passenger vessels. Vessels with drafts up to 7.3m can be accommodated. For more berthing information see the table titled

Tonsberg—Berth Information.


Aspect.—The fairway within the canal is marked by buoys. A prominent crane and several conspicuous sheds stand in the vicinity of the shipyard, W of the bridge.

Anchorage.—Traela (59°15'N., 10°26'E.), a basin lying close E of the harbor area, provides anchorage, in a depth of 12m, about 0.5 mile SE of the entrance to the canal.

Sheltered anchorage for large vessels is available, in depths of 24 to 26m, mud and clay, near the entrance to Husoysund, about 0.3 mile SE of the S end of Jersoy. It is reported that small vessels anchored in this roadstead are troubled by winds from the E and SE.

Caution.—Several submarine pipelines and cables lie within the harbor area and may best be seen on the chart.

Tonsberg—Berth Information					
Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Beam	
Channel Quay Terminal					
Channel	300m	6.0m	110m	17.9m	General cargo, iron, sand, gravel, and building blocks.
Tollbodkaien Terminal					
Tollbodkaien	200m	6.5m	—	—	Passengers.
Scan Rope Terminal					
Scan Rope	100m	6.0m	—	—	Breakbulk.
Grenland Group					
Grenland	250m	8.0m	—	—	Offshore vessels and breakbulk.

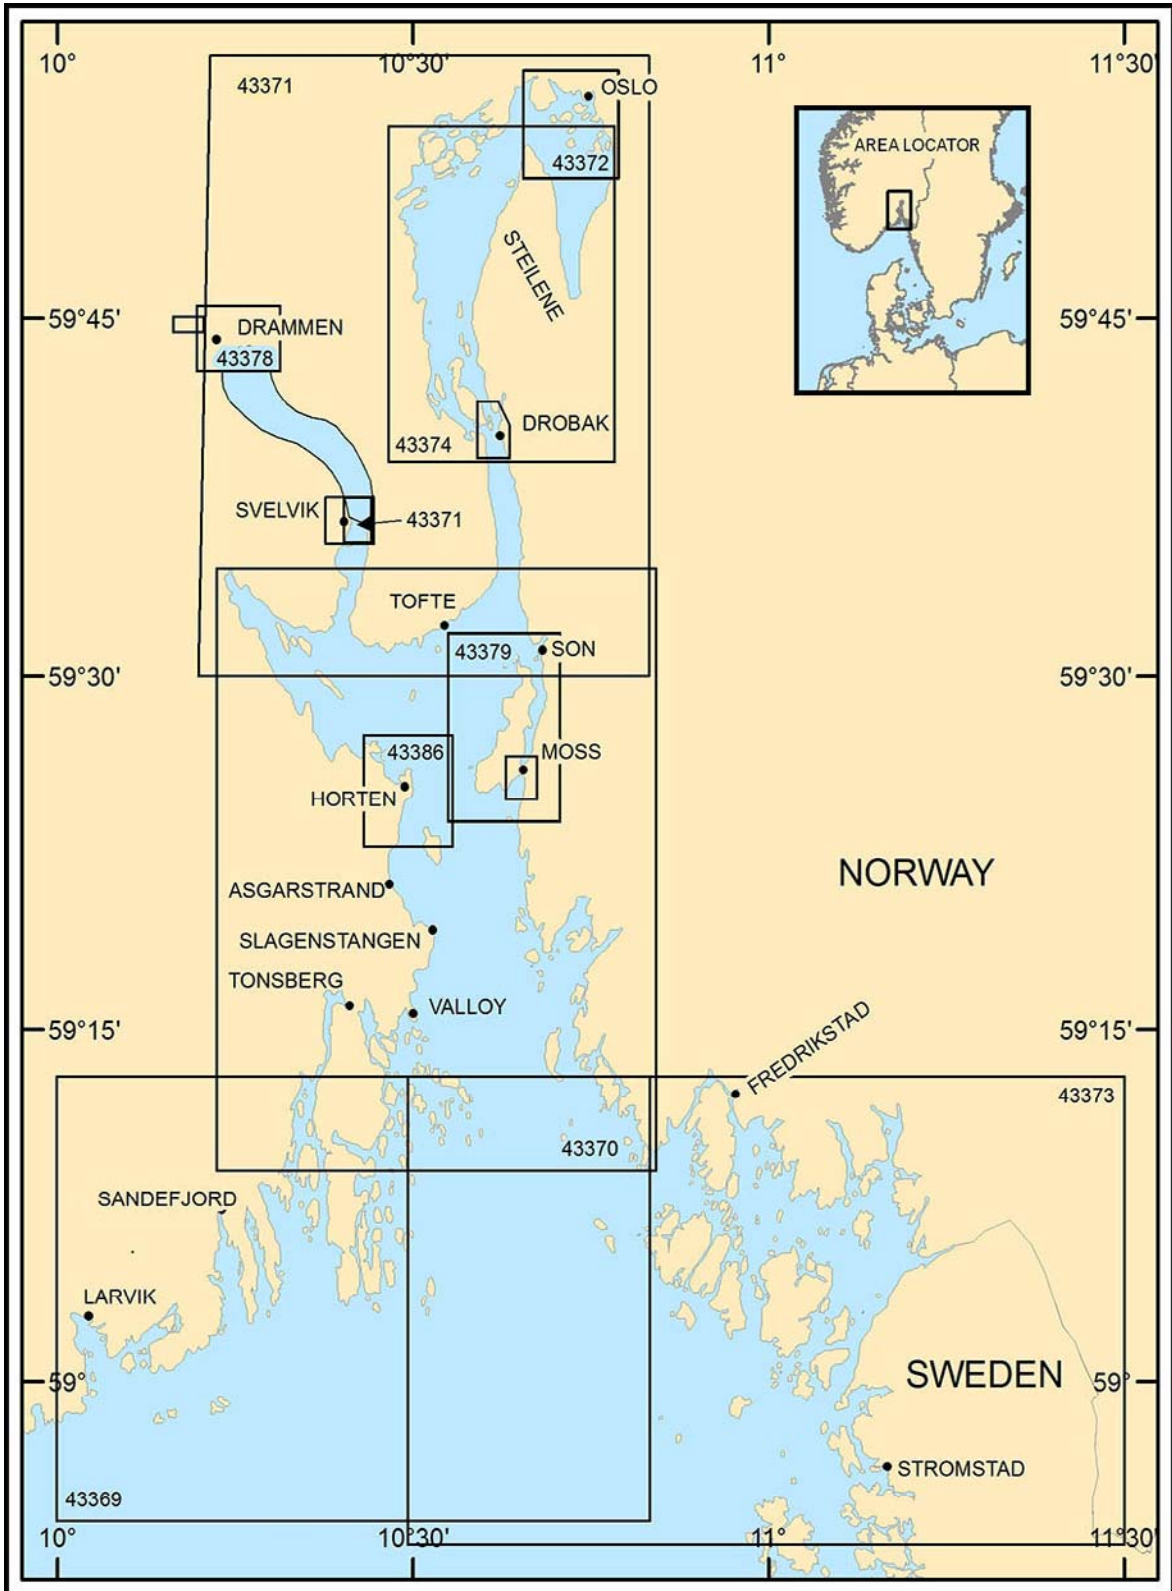

Additional chart coverage may be found in NGA/DLIS Catalog of Maps, Charts, and Related Products (Unlimited Distribution).
SECTOR 4 — CHART INFORMATION

SECTOR 4

NORWAY—SOUTHEAST COAST—OSLOFJORDEN

Plan.—This sector describes the SE coast of Norway including Oslofjorden and the approaches, between the S extremity of Tjome and Sekken, a waterway lying about 21 miles ESE. The description is from seaward for Oslofjorden and from W to E for the approaches to Sekken.

General Remarks

4.1 Oslofjorden, the most extensive of all the inlets on the SE coast of Norway, extends inland from its seaward entrance for a distance of 57 miles to Oslo, the principal metropolis and administrative center of Norway. Dramsfjorden, a lesser inlet, branches to the NNW about midway along the W side of Oslofjorden. A large, irregular coastal bight lies at the SE side of the fjord. It is obstructed by a large group of islands, known commonly as Hvaler. Svinesund, Ringdalsfjorden, and Iddelfjorden, a continuation, lead ENE and SSE for about 13 miles from the E side of the bight. These fjords extend inland and are shared between Norway and Sweden.

The main harbors of Slagenstangen and Horten lie on the SW side of Oslofjorden, Moss lies on the E side, and Drammen lies at the head of Dramsfjorden. Fredrikstad lies on the N side of the bight indenting the SE side of Oslofjorden and Halden lies at the E end of Ringdalsfjorden.

Oslofjorden differs from the fjords located along the W coast of Norway in that it is shallower and the shores are lower and less precipitous.

Ice.—Ice occurs throughout Oslofjorden, particularly during January and February. Generally, the channels leading to Oslo and the other main ports are kept open by icebreakers. During severe winters, the entire fjord may freeze. When this occurs with strong S winds, drift ice from the Kattegat may be forced into the fjord. This condition may halt all navigation for a short period.

Tides—Currents.—Currents from the Kattegat set N along the Swedish coast as far as the Kosteroarna Islands, where they swing NW, set across the entrance to Oslofjorden, and continue on down the Norwegian coast. These currents may attain a maximum rate of over 1 knot during gales from the E.

Currents within Oslofjorden are variable and largely influenced by meteorological conditions. The general flow is usually outgoing, especially when the rivers are in flood.

Aspect.—The hills on both sides of Oslofjorden are generally covered by fir and pine trees. The trees are interspersed with clear patches containing farms, which can be identified by groups of buildings. In the section extending up to about 15 miles below Oslo, the shores of the fjord become steeper and there are more areas of cultivation and deciduous trees. The inland hills are distinctive and numerous houses stand on the low land.

Bjornerodpiggen (59°01'N., 11°25'E.), the tallest elevation rising on the E side of the fjord area, is formed by the prominent summit of Loversfjallet mountain. It is 222m high and generally is the first landmark to be seen from seaward during

clear weather. Also prominent is Dragonkullen, a hill 168m high, which stands 6 miles NNW of Bjornerodpiggen.

The **Kosteroarne Islands** (58°53'N., 11°02'E.), a group lying on the SE side of the entrance to the fjord, are often seen from seaward before the higher inland elevations during periods of poor visibility.

Vagnarbergen (59°02'N., 11°09'E.), a range of hills rising to a height of 120m, stands on the Swedish coast and is usually visible from up to 20 miles seaward.

Bankerodkollen (59°06'N., 10°54'E.) is 72m high and, along with Skjelsbuveten 0.4 mile SSE, forms the summit of the island of Vesteroy. These two points may easily be identified from SW by the gap between them. They are also the highest elevations of Hvaler, the group of islands fronting the mainland in this vicinity.

Pilotage.—The practice of requesting pilots through the local stations has been discontinued. The waters and ports described in this sector lie within the Horten Pilot Booking Center Area, which extends E from Egersund (58°27'N., 6°00'E.) to the Swedish border. For further details, see paragraph 1.1, paragraph 4.9, and Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.


Pilotage is compulsory for vessels of any size, unless exempted from using a pilot.

Horten Pilot Boarding Locations	
Description	Position
1.5 miles E of Store Faerder Light	59°04.5'N, 10°34.5'E
1 mile NW of Struten Light	59°07.6'N, 10°43.2'E
2.3 miles WSW of Utgardskilen Light	59°03.1'N, 10°47.0'E
1.4 miles W of Trestene Light	59°01.7'N, 10°51.1'E
1 mile NW of Nord-Hallso Light	58°58.6'N, 11°02.7'E
3 miles SSW of Laksskjaer Light	59°00.0'N, 10°25.0'E

Vessels should send requests for pilot services 24 hours before arrival using Safe Sea Net (SSN) or directly to the Horten Pilot Booking Center by facsimile, telephone, or VHF channel 13, stating IMO Ship Reporting System (SRS) items: ALPHA, HOTEL, INDIA, OSCAR, PAPA, UNIFORM, and X-RAY (including the reason for call and whether one or two pilots are required). Be advised the use of the Pilot Booking Center as opposed to SSN may incur additional charges.

Vessels should send follow-up notification for pilots 2 hours before arrival to Horten Pilot Booking Center by facsimile, telephone, or VHF channel 13 stating IMO SRS items ALPHA and HOTEL.

For information on the IMO SRS Items, see the tables titled **Safe Sea Net (SSN) Designators** and **Required IMO SRS**

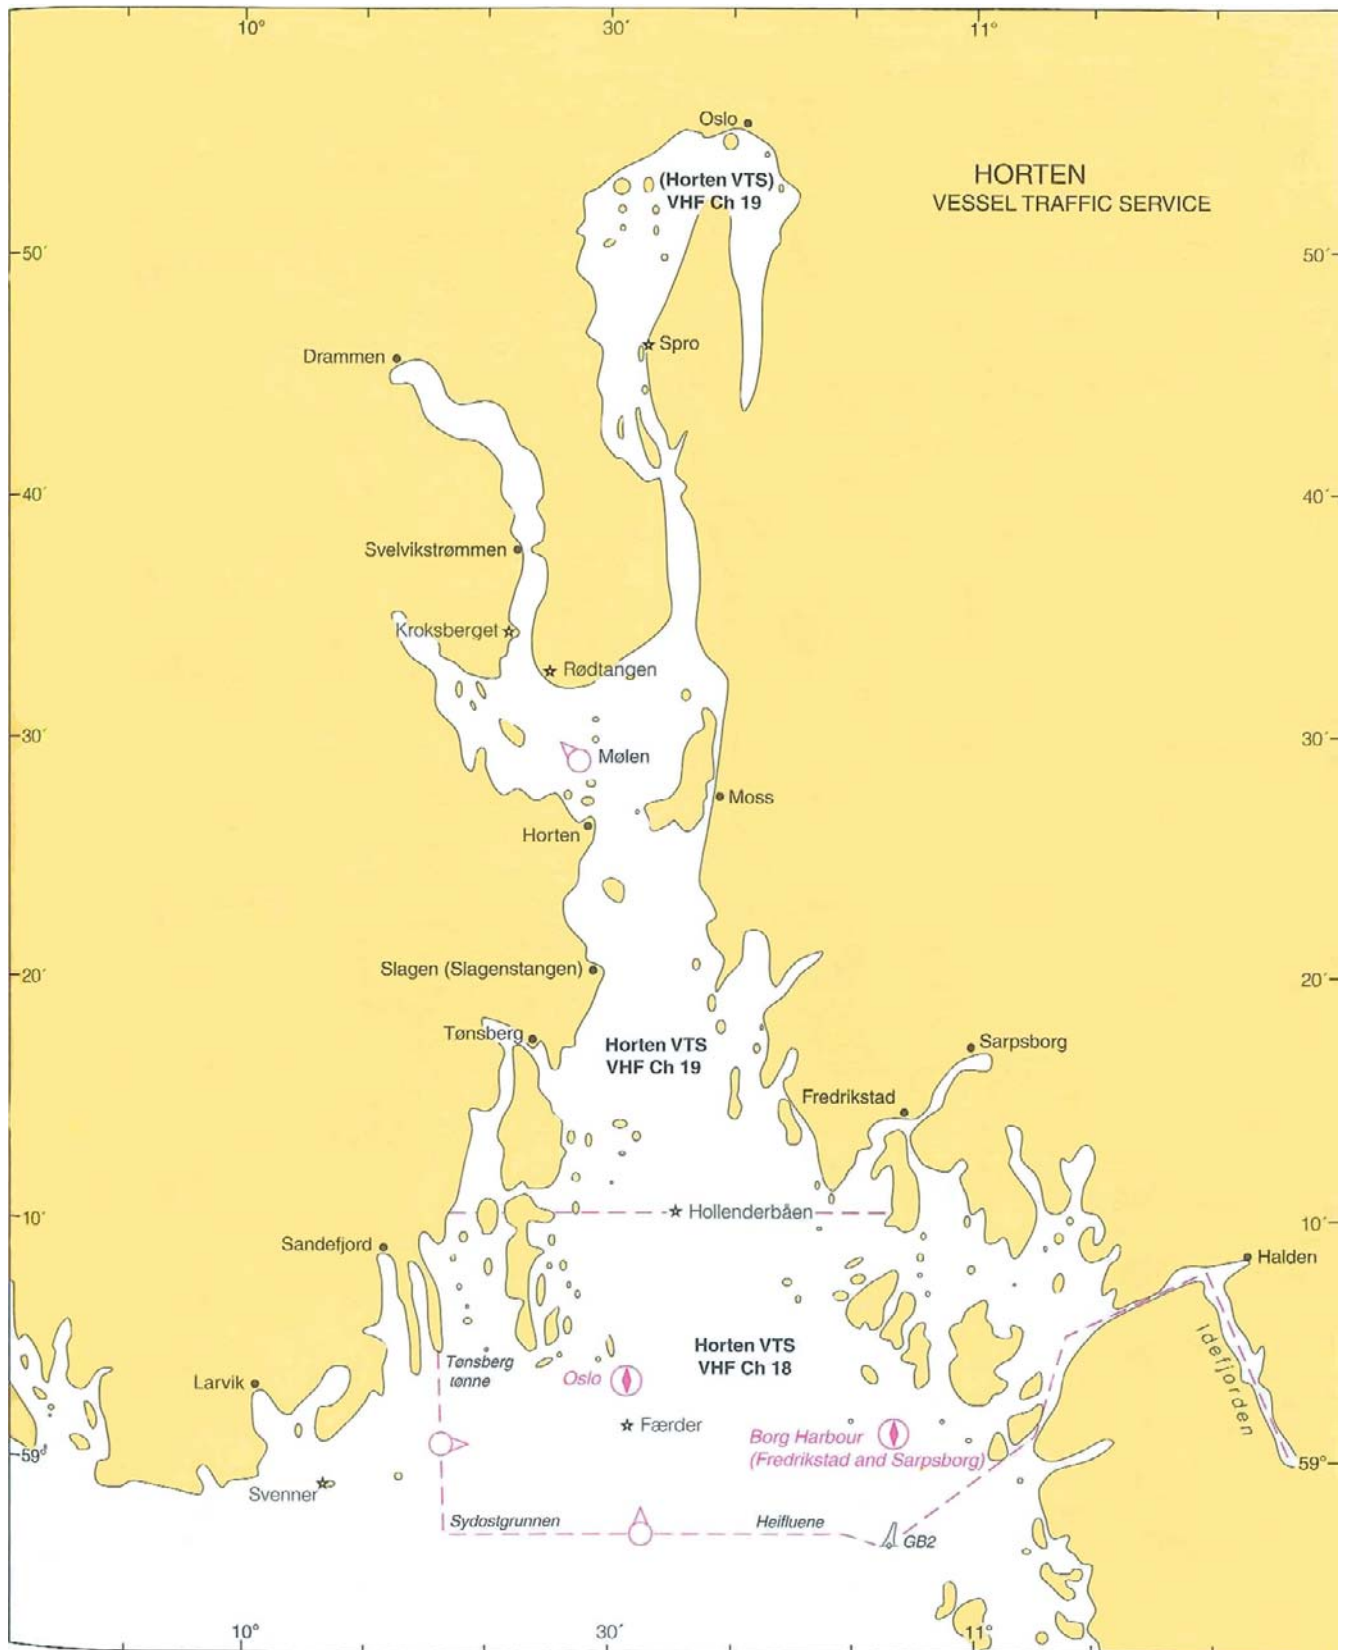

Oslofjorden (Horten) VTS and Pilot Stations

Format in paragraph 4.9.

The Horten Pilot Booking Center is co-located with Horten Vessel Traffic Service Center. The order for pilots can be sent via the agent.

Horten Pilot Booking Center—Contact Information	
Pilots	
Call sign	Horten Pilot Booking Center
VHF	VHF channel 13
Telephone	47-33-034970
Facsimile	47-33-034999

Regulations.—Sea Safe Net (SSN) is a mandatory reporting system operated by the Norwegian Coastal Administration for all vessels entering Norwegian ports. For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

Oslofjorden lies within the restricted inner (internal) waters of Norway. Entry of foreign commercial vessels into the inner (internal) waters is subject to certain regulations and procedures. For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

Special recommendations concerning routes applying to tankers of 40,000 dwt and over navigating along the coast and approaching Oslofjorden are described in paragraph 1.1.

A maximum speed restriction of 5 knots is in effect at a distance of 100m from land or islands from Sandefjord municipality to Faerder municipality.

Vessel Traffic Service (VTS).—NOR Vessel Traffic Service (NOR VTS) is in operation for vessels transiting the Norwegian Economic Zone (NEZ) from the Norway/Sweden border in the S to the Norway/Russia border in the N. The NEZ also includes the areas around Svalbard and Jan Mayen Island. For further information, see paragraph 1.1.

Horten VTS is in operation in Oslofjorden and the approaches to Oslo. The VTS provides traffic information and issues clearances for the VTS area. Clearances will be granted on the information given in reports. Clearances may be withheld subject to size or type of vessel, geoWeb siteical location within the VTS area, visibility for the area and time of day and traffic.

The VTS provides information service, traffic organization service, and navigational assistance to all vessels.

Participation in the VTS is mandatory for the following:

1. All vessels, 24m in length and more (vessels pushing another vessel ahead are considered one vessel).
2. Vessels with tow longer or wider than 24m.
3. Vessels carrying hazardous liquid or polluting cargoes in bulk, regardless of size.
4. Vessels involved in towing operations where the length exceeds 35m.

All vessels must request sailing clearance at least 1 hour prior to entering or leaving a quay or anchorage. The following information must be provided in this request:

1. Vessel name and call sign.
2. Vessel sailing plan and destination.
3. Vessels located outside the VTS Zone must also include ETA at the VTS outer limit and ETA at the port, mooring, or anchorage.

ing, or anchorage.

4. Vessels located inside the VTS Zone must include ETD for the VTS Zone.

5. Note that other information may be requested by the VTS such as vessel type, nationality and port of registration.

Vessels that have obtained permission to enter the VTS Zone must notify VTS at the following times:

1. Upon crossing the outer limit when entering the VTS.
2. Before departing a specific berth or dock and also when departing a berth or mooring area:
3. When being towed or anchoring.
4. If involved in an accident.
5. If the vessel is experiencing difficulty maneuvering and it might result in a change of voyage plan.

All vessels, including commercial vessels engaged in fishing, hunting, or seaweed and kelp harvesting shall keep a continuous VHF watch on the working channel for the area they are in.

Communication shall be in a Scandinavian language, or English if the vessel is not using a pilot.

The seaward limit of the VTS area consists approximately of, on the W side, a line extending S from Tonsberg Tonne Beacon (59°03'N., 10°19'E.) and, on the S side, latitude 58°57'N.

The Horten VTS Area is divided into two sectors, as follows:

1. Sector 1—S of 59°10.0'N.
2. Sector 2—N of 59°10.0'N.

Horten VTS Center—Contact Information	
VTS	
Call sign	Horten VTS
VHF	Sector 1 = VHF channels 16 and 18
	Sector 2 = VHF channels 16 and 19
Telephone	47-33-034-960
	47-33-034-953
	47-47-465-448
Facsimile	47-33-034-999
E-mail	horten.vts@kystverket.no
Web site	https:// www.kystverket.no

Caution.—Numerous firing exercise areas are situated in the approaches to Oslofjorden and extend up to about 30 miles seaward. Warnings are disseminated by local notice to mariners and coastal radio stations. For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

Numerous submarine cables and pipelines, which may best be seen on the chart, lie within the fjord and connect the islands to the mainland. Vessels should be aware that where pipelines are located close together, only one may be charted. In addition, some pipelines are located above the sea bed and their presence may effectively reduce the charted depth by as much as 2m.

In Norwegian waters, some submarine power cables may conduct high voltages; contact with or being close to them may



By Ole Brastad [CC BY 2.0 <https://creativecommons.org/licenses/by/2.0>], via Wikimedia Commons

Faerder Light

pose a danger. Vessels should also be aware that some of these cables in the inner waters may not be charted.

Depths within the central part of Oslofjorden are deep but very uneven. They may vary by as much as 200m over a distance of only 0.5 mile.

Drift-net fishing for mackerel and salmon is carried out off the entrance to Oslofjorden between May and August.

Purse net and land net fishing is carried out within Oslofjorden between June and September.

Oslofjorden—Central Passage

4.2 Numerous small islands, islets, and rocky shoals front both sides of Oslofjorden and may best be seen on the chart.

Lille Faerder (59°02'N., 10°31'E.), a group of islets also known as Tristeinane, lies on the SW side of the approach to Oslofjorden. Faerder Light, equipped with a racon, is shown from a prominent tower, 43m high, standing on the middle islet.

Tristeingrund, a detached shoal, lies at the S end of a bank, about 0.8 mile SSW of the light. It has a least depth of 1m and is marked by a buoy. A number of isolated shoal patches, with depths less than 5m, are reported to lie up to 0.7 mile S of this buoy. These isolated shoals form the outermost dangers in this vicinity.

Store Faerder (59°04'N., 10°31'E.) is a bare dark gray is-

land almost 2 miles in length; it can easily be identified by a deep cleft on the S edge, which is visible from E and W. A light is shown from a structure standing on the N end of this island. A number of islets and shoals lie between the S end of the island and Lille Faerder.

Laksjera Light (Laksskjaer) (59°03'N., 10°28'E.) is shown from a tripod structure, 10m high, standing on an islet lying 2.3 miles NW of Faerder Light, at the SE edge of the dangers fronting the S end of Tjome.

Torbjornskjaer Light (59°00'N., 10°47'E.) is shown from a prominent building with a tower, 18m high, standing on an islet lying on an extensive shoal bank. Shoals, with depths of less than 20m, extend up to about 1 mile SW, 1 mile W, and 1.8 miles N of the light.

Nordre Stroregrunn, a detached shoal bank, lies about 4.3 miles NW of Torbjornskjaer Light and has a least depth of 29m.

Trestenene Light (59°02'N., 10°54'E.), equipped with a racon, is shown from a structure standing on a group of rocks, 4 miles NE of Torbjornskjaer Light.

4.3 Struten Light (59°07'N., 10°44'E.) is shown from a structure, 13m high, standing on an islet lying on a shallow bank, 7.4 miles NNW of Torbjornskjaer Light. A disused lighthouse building with a tower, 14m high, is situated close to the light and is conspicuous from seaward.

Sostrene, consisting of two small islands lying on a reef, is centered about 1 mile SE of Struten Light. The islands are 34 to 40m high and are distinctive due to their dark brown color.

Hoka, a detached shoal with a least depth of 25m, lies about 1.9 miles SW of Struten Light and forms the outermost danger in this Vincent.

The main entrance of Oslofjorden lies between the S extremity of Tjome and Torbjornskjaer Light, 8 miles ESE, and is wide. The fjord extends about 25 miles N and then decreases to a width of only 2 miles.

4.4 Hollenderbaen Light (59°10'N., 10°38'E.), equipped with a racon, is shown from a prominent column, 18m high, standing on a shoal lying 8.5 miles NNE of Faerder Light, at the E edge of the dangers fronting Notteroy. The shoal is marked by breakers during S gales.

Fulehuk Light (59°11'N., 10°36'E.) is shown from a structure standing, at an elevation of 9m, on an islet lying on a reef, 1.3 miles NW of Hollenderbaen Light

A disused lighthouse building, with a tower 15m high, is situated close S of the light and is conspicuous from seaward.

Stromtangen Light (59°09'N., 10°50'E.) is shown from a column structure, 8m high, standing on the S end of an islet lying close off the mainland, 3.4 miles NE of Struten Light. A disused lighthouse building, with a tower, is situated close to light and is conspicuous from seaward.

Sondre Missingen (59°10'N., 10°43'E.), the largest island of a group, lies on a reef, 3.9 miles WNW of Stromtangen Light, and is marked by a prominent beacon.

Veslekalv Light (59°15'N., 10°42'E.) is shown from a structure, 3m high, standing on an islet lying close off the N end of Rauer, 6 miles NNE of Hollenderbaen Light.

Medfjordbaen Light (59°20'N., 10°34'E.), equipped with a racon, is shown from a column, 14m high, standing on rocky reef, 10.7 miles NNW of Hollenderbaen Light.

Caution.—A military restricted area surrounds Rauer and restricts vessel entry within a distance of 50m from the shoreline (except at Rauerkalven).

4.5 Bastoy Light (59°23'N., 10°32'E.) is shown from a structure standing on the NE end of Bastoy, an island lying 3 miles NNW of Medfjordbaen Light. A disused lighthouse building with a tower, 14m high, is situated close SW of the light and is conspicuous from seaward.

Bastoy is flat and prominent from S due to its dark forested color. It is also prominent from E due to the isthmus which separates the N part from the S part of the island.

Revingrevet Light (59°24'N., 10°38'E.) is shown from a structure standing on the NW side of an islet lying on a reef, close off the E side of the fjord, 3 miles ENE of Bastoy Light.

Gullholmen Light (59°26'N., 10°34'E.) is shown from a structure, 8m high, standing on the W side of an islet lying on a reef, close off the E side of the fjord, 3.1 miles NNE of Bastoy Light. A disused lighthouse building with a tower, 9m high, is situated close to the light and is conspicuous from seaward.

Molen Light (59°29'N., 10°30'E.) is shown from a structure standing on the SW side of an islet, 3.7 miles NW of Gullholmen Light. This islet lies at the S end of a narrow reef which extends about 2.5 mile S from the S side of Hurum.

Ostnestangen Light (59°31.2'N., 10°30.6'E.) is shown from a

structure standing on the S end of a small peninsula, 2.3 miles NNE of Molen Light. Ramvikholmn, an islet marked on its NW side by a light, lies on a detached reef about 0.7 mile E of Ostnestangen Light. Tofteholmen, an islet 32m high, lies 0.7 mile ESE of Ramvikholmn.

Filtvet Light (59°34'N., 10°37'E.) is shown from a structure, 14m high, standing on the SE side of Hurum, 8.3 miles NNE of Gullholmen Light. A disused lighthouse building with a tower, 14m high, is situated close to the light and is conspicuous from seaward.

4.6 Elle Light (59°38'N., 10°38'E.) is shown from a structure standing on the E side of the fjord, 4.2 miles NNE of Filtvet Light.

Nordre Kahlomen Light (59°40.7'N., 10°36.5'E.) is shown from a structure standing on the E side of a small island of the same name, 2.5 miles N of Elle Light. Sondre Kahlomen, another small island, lies close S of Norde Kahlomen and is connected to it by a very narrow isthmus.

Smaskjera, consisting of two above-water rocks, lies on the SE edge of a shallow rocky ridge, 0.8 mile S of Norde Kahlomen Light, and is marked by a buoy. The shoal ridge extends 0.3 mile W from the rocks to the W shore of the fjord and 0.4 mile NNW from the rocks to the S end of Sondre Kahlomen. A detached shoal patch, with a least depth of 10m, lies close NNE of Smaskjera.

Drobakgrunnen, a detached rocky shoal, lies about 0.2 mile off the E side of the fjord, about 0.3 mile ENE of Smaskjera. It has a least depth of 4.6m and is marked by a lighted buoy, on the W side, and a buoy, on the NE side.

4.7 Langebat Light (59°41.2'N., 10°36.4'E.) is shown from a structure standing on a reef lying close off the E side of the fjord, 0.5 mile N of Norde Kahlomen Light.

Range lights are shown from structures standing at Tronstadodden, at the E side of Haoya, about 0.9 mile NW of Norde Kahlomen Light. Batsto Lighted Beacon is situated on a reef close off the E side of the fjord, 0.4 mile ENE of these range lights.

Askholmane Light (59°42.2'N., 10°35.5'E.) is shown from a structure standing on the N end of an islet lying 1.1 miles NNW of Langebat Light. This islet is the easternmost of a group of islets lying on a shallow bank near the middle of the fjord.

Storegrunnen Light (59°42.6'N., 10°35.3'E.) is shown from a structure standing on a detached shoal patch, 0.4 mile NNW of Askholmane Light.

Digerudgrunnen Light (59°43.2'N., 10°35.2'E.) is shown from a column, 8m high, standing on a shoal bank at the E side of the fjord, about 0.6 mile N of Storegrunnen Light.

Aspond Light (59°43.5'N., 10°34.7'E.) is shown from a structure standing on the SE side of a small island, 0.4 mile NW of Digerudgrunnen Light.

Nordre Sundbyholmen Light (59°43.6'N., 10°32.1'E.) is shown from a structure standing on an islet at the W side of the fjord, 1.6 miles WNW of Digerudgrunnen Light.

Spro Light (59°45.7'N., 10°34.9'E.) is shown from a framework structure standing at the E side of the fjord, 2.5 miles N of Digerudgrunnen Light.

Langara Light (59°45.4'N., 10°34.0'E.) is shown from a structure standing on the E side of a small island, about 0.6



By Jacob Munk-Stander [CC BY 2.0 (<https://creativecommons.org/licenses/by/2.0>)], via Wikimedia Commons

Steilene Light

mile SW of Spro Light.

Caution.—A submarine pipeline extends N and S from Langebat Light.

4.8 Steilene Light (59°49.0'N., 10°35.6'E.), now disused, was shown from a column, 9m high, standing on the SW end of an islet of the same name, about 3.3 miles N of Spro Light. A building, the former dwelling of the lighthouse keeper, is situated close to the light. The islet, which is also marked by a light at its N end, lies within a group of dangers which extend up to about 1 mile from the E shore of the fjord.

Sondre Steilesand, a detached shoal patch, lies 0.6 mile SW of Steilene Light. It has a least depth of 8.3m and is marked by a buoy.

Storegrunnane, a rocky shoal patch, lies about 0.6 mile W of Sore Steilesand and has a least depth of 13.5m.

Ostre Masane (59°49.5'N., 10°35.0'E.), a group of shoals, lies centered about 0.6 mile NW of Steilene Light and is marked by a buoy.

Bjorkoygrunnen Light (59°49.9'N., 10°31.6'E.) is shown from a structure standing on a reef at the W side of the fjord, 2.3 miles WNW of Steilene Light.

Gasungane Light (Gassungene) (59°50.4'N., 10°35.2'E.), equipped with a racon, is shown from a tripod structure standing on a partly drying reef, about 1.4 miles NNW of Steilene Light. The S end of the reef is marked by a buoy and a beacon

is situated close E of the light.

Gasoya Light (59°51.1'N., 10°35.3'E.) is shown from a structure standing on Arnesflua, a rock lying close off the SE side of Gasoya Island, about 0.7 mile N of Gasungane Light.

Illjærnsflua Light (59°51.3'N., 10°37.9'E.) is shown from a structure, 14m high, standing on a detached shoal, 1.3 miles ENE of Gasoya Light.

Nesodtangen Light (59°59.3'N., 10°39.4'E.) is shown from a tripod structure, 5m high, standing on a rock lying close off the N side of Nesodden, 1.2 miles NE of Illjærnsflua Light.

Storesanden, a detached shoal bank, lies about 0.9 mile WSW of Nesodtangen Light and has a least depth of 12.5m.

Tangegrunnane, a group of detached rocky shoals, extends up to about 0.5 mile N of Nesodtangen Light.

Oslofjorden

4.9 The main route for shipping in the S and central parts of Oslofjorden, although narrow in places, presents no difficulties by day or at night. However, it is recommended that large vessels navigate the route through the fjord to the N of Drobak (59°40'N., 10°38'E.) only during daylight.

Major harbors in the fjord are:

1. Horten (59°25'N., 10°29'E.), an industrial center.
2. Moss (59°26'N., 10°40'E.), a commercial/industrial town.

3. Oslo Havn (59°54'N., 10°44'E.), the principal harbor in Norway.

4. Drammen (59°44'N., 10°14'E.), the commercial/industrial center.

Depths—Limitations.—The main route leading through the fjord has a least depth of 15m, which lies on a bank close W of Drobakgrunnen (59°40.0'N., 10°37.2'E.).

Pilotage.—Pilotage within Oslofjorden is compulsory unless exempted.

Vessels should send a request for pilotage 24 hours in advance using Safe Sea Net (SSN) via agents, or through the Horten Pilot Booking Center by facsimile, telephone, or VHF channel 13. The message to the Horten Pilot Booking Center should include IMO SRS Items A, H, I, O, P, U, and X. See the tables titled **Safe Sea Net (SSN) Designators** and **Required IMO SRS Format** for details. The message should include the reason for call and confirm if 1 or 2 pilots are required. Be aware that the use of the Pilot Booking Center may incur additional charges. The Horten Pilot Booking Center is co-located with Horten Vessel Traffic Service Center.

Safe Sea Net (SSN) Designators	
Designator	Details
A	Vessel's name.
B	Call sign.
C	Nationality.
D	LOA, beam, and gt.
E	Draft.
F	Nature of cargo.
G	Destination.
H	Purpose of call.
I	ETA at pilot boarding area or ETD from harbor.
J	Whether one or two pilots are required.
K	Vessel's IMO number (if any).
L	Crew and passengers (master's name and nationality, size of crew, etc.).
M	Cargo and bunker fuel (UN number and quantity of hazardous or polluting cargo, type and quantity of bunker fuel etc.
N	Details of passage (last port of call, next port of call etc.).
O	Details related to pilotage requests and Pilotage Exemption Certificates (PEC) Pilotage service dues and transitional arrangements should be made to the appropriate pilot booking center.
P	Agent or operator (i.e. the Norwegian contact).
Q	Shipping company (name and address).

If using the Horten Pilot Booking Center vessels should send a subsequent notification for pilots 2 hours before arrival, through facsimile, telephone or VHF channel 13 stating IMO SRS Items A and H.

Required IMO SRS Format	
Item	Description
A	Vessel name, call sign, and IMO number.
H	Date, time, and point of entry.
I	Destination and ETA.
O	Maximum draft in meters.
P	Cargo on board.
U	Ship size and type.
X	Any other information requested.

For further details, see paragraph 4.1 and Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

Regulations.—Vessels with drafts over 9.1m are not permitted to navigate N of Drobak (59°40'N., 10°38'E.) at night.

Tankers proceeding to oil installations situated N of Drobak (59°40'N., 10°38'E.) are permitted to have a maximum draft of 9.1m at night and a maximum draft of 11m by day.

Tankers exceeding 35,000 dwt are not permitted to pass Drobak when loaded.

Tankers exceeding 10,000 dwt, when navigating between Filtvet Light and the oil installations in the inner part of Oslofjorden, are required to display the appropriate signals for vessels constrained by their draft.

In addition, tankers may use a sound signal, consisting of one long blast followed by two short blasts, at night or by day.

Anchoring, fishing, and diving are prohibited within an area, which may best be seen on the chart, extending between Drobak and Norde Kalhomen Light (59°41'N., 10°37'E.).

Vessel Traffic Service.—A Vessel Traffic Service (VTS) operates in Oslofjorden and its approaches. The seaward limit of the VTS area consists approximately of, on the W side, a line extending S from Tonsberg Tonne Beacon (59°03'N., 10°19'E.) and, on the S side, latitude 58°57'N. For further information, see paragraph 1.1.

Directions.—A Traffic Separation Scheme (TSS), which may best be seen on the chart, is situated in the entrance to Oslofjorden and lies centered 2.3 miles SE of Faerder Light (59°02'N., 10°31'E.). The inbound traffic lane is located on the SE (outer) side of the separation zone and the outbound lane is located on the NW (inner) side.

From the N end of the inbound traffic lane, the main route through Oslofjorden leads in a N direction for about 8 miles, using the white sector of Hollenderbaen Light (59°10'N., 10°38'E.). It passes E of Store Faerder Light (59°04'N., 10°32'E.) and W of Struten Light (59°07'N., 10°44'E.).

An extensive Traffic Separation Scheme (TSS), which may best be seen on the chart, extends NNW from the vicinity of Hollenderbaen Light to the vicinity of Gullholmen Light (59°26'N., 10°34'E.). The inbound traffic lane lies on the E side of the separation line. The scheme passes ENE of Fulehuk



Filtvet Light (with disused lighthouse)

Light, Medfjordbaen Light, and Bastoy Light, and WSW of Sondre Misingen (59°10'N., 10°43'E.) and Revlingrevet Light.

From W of Gullholmen Light, the TSS continues in a NNE direction to the vicinity of Filtvet Light (59°34'N., 10°37'E.). It passes ESE of Molen Light, Ostnestangen Light, and Tofteholmen. From E of Filtvet Light, the TSS continues in a N direction to the vicinity of Elle Light (59°38'N., 10°38'E.).

There are a number of alternate routes in the N part of the fjord, which may best be seen on the chart. Alternate secondary tracks lead W of Askholmane (59°42'N., 10°35'E.), W of Aspond (59°44'N., 10°34'E.), W of Langara (59°45'N., 10°34'E.), and SE of Gasungane Light. However, only the main route is described below.

The main route continues N from E of Elle Light to the vicinity of Drobak (59°40'N., 10°38'E.). It then leads in a NNW direction and passes between Smaskjera, on the W side, and Drobakgrunnen, on the E side.

The track continues in a NNW direction and is adjusted to pass close E of Norde Kalthomen Light, WSW of Langebat Light, ENE of Tronstadodden Range Lights, WSW of Batsto Lighted Beacon, ENE of Askholmane Light, ENE of Storegrunnen Light, and WSW of Digerudgrunnen Light (59°43.2'N., 10°35.2'E.).

The track then leads in a N direction to the vicinity of Gasungane Light (59°50.4'N., 10°35.2'E.). It is adjusted to pass E of Aspond Light, E of Langara Light, W of Spro Light, W of Sondre Steilesand, E of Storegrunnen, W of Steilene Light (59°49.0'N., 10°35.6'E.), and W of Ostre Masane.

The route passes close W of Gasungane Light and then leads in a NE direction to the vicinity of Nesodtangen Light (59°59.3'N., 10°39.4'E.), in the approaches to Oslo. It passes SE of Gasoya Light, NW of Illjærnsflua Light, and SE of Store-sanden.

A small TSS, which may best be seen on the chart, lies 0.4 mile W of Nesodtangen Light and is marked by a buoy at the N end.

Caution.—The section of the route extending between the N end of the Traffic Separation Scheme (TSS), located in the vicinity of Elle Light (59°38'N., 10°38'E.), and the TSS located W of Nesodtangen Light (59°59.3'N., 10°39.4'E.) is designated as a Precautionary Area. All vessels must navigate with extreme caution when passing through this narrow area.

Waterway regulations in Norwegian internal (inner) waters

differ from those in 72 COLREGS. Details of these regulations should be obtained locally.

The Traffic Separation Schemes (TSS) located in Oslofjorden are not IMO-adopted. However, the Norwegian government advises vessels that Rule 10 of the 72 COLREGS applies.

Explosive dumping ground areas, which may best be seen on the chart, lie centered 3 miles S and 2.8 miles NNE of Medfjordbaen Light (59°20'N., 10°34'E.).

A number of anchorages, which may best be seen on the chart, lie within the shallower parts of the fjord and adjacent coves. Generally, local knowledge is required and foreign vessels should consult the pilot.

Oslofjorden—West Side

4.10 Between Helgerodtangen, the S extremity of Tjome, and Horten, about 21 miles N, the W side of the fjord is divided into two distinct parts. The S part consists of an intricate complex of islands, islets, rocks, and waterways, including the heavily populated islands of Tjome and Notteroy. The N part, by contrast, consists of a forested segment of the mainland coast, which falls off in a gentle slope toward the fjord.

Several passages, available to smaller vessels with local knowledge, lead through the many off-lying dangers situated within the S part of this area and then into the entrance of Oslofjorden. The main passages are Rossesundet (59°04'N., 10°26'E.), Sandoyundet (59°04'N., 10°28'E.), and the channel leading W of Store Faerder.

Regulations.—A maximum speed restriction of 5 knots is in effect at a distance of 100m from land or islands from Sandefjord municipality to Sande municipality. This restriction includes Faerder, Tonsberg, Horten, Re, and Holmestrand municipalities.

Huikjela (59°10'N., 10°34'E.) is the principal passage connecting Tonsberg with Oslofjorden. It is the most direct and least encumbered route. The route leads in a NW direction for 6.5 miles through the off-lying dangers from a position located 1.2 miles SW of Hollaenderbaen Light (59°10'N., 10°38'E.). The channel is entered between the islets of Vierskjaera, located 2.6 miles W of the above light, and Store Rauer, 1.2 miles NE. For further details, see paragraph 3.17

Leisteinlopet (59°08'N., 10°32'E.) is the most direct approach to Vrengen from seaward. It leads in a NW direction through the off-lying dangers from a position located about 2 miles SE of Leistein Light (59°08.5'N., 10°29.7'E.). Vessels can then reach Tonsbergfjorden via Vrengen.

Veten (59°10'N., 10°26'E.), the summit of Notteroy, rises in the SE part of the island to a height of 99m. This hill is conspicuous from the E. Slottsfjelltarnet, a tower standing in the W part of Tonsberg, is conspicuous from SE, but is obscured on some bearings.

4.11 Valloy (Vallo) (59°16'N., 10°30'E.) the site of an oil refinery and a large tank farm, is situated on a peninsula, which forms the NE side of Valloybukta, a small bay. An extensive industrial complex stands at the SW side of this bay on the NE side of Jersey.

Three quays front the inner side of the peninsula, considered to be part of the port of Tonsberg. The largest berth, which is

situated on the NW side of the southernmost quay, is 82m long and has depths of 8.3 to 10.1m alongside.

Vessels may anchor within Valloybukta, N of a submarine pipeline, in depths of 13 to 15m, clay, about 0.2 mile WNW of the quays.

The bay may be approached directly from Oslofjorden through Torgersogapet or via Hiuljela (59°10'N., 10°34'E.). Torgersogapet, which has a least depth of 5.5m, leads W from the fjord. It passes between the S end of the peninsula and the N side of Torgersoy Island, which is marked by a light.

4.12 Slagenstangen (59°19'N., 10°32'E.) (World Port Index No. 23736) point, also known as Slagen, located on the W shore of Oslofjorden about 3.5 miles NNE of Valloy, is the site of an oil refinery and terminal. The terminal is managed by Norske ESSO and considered to be part of the port of Tonsberg.

Tides—Currents.—The current usually sets SE across the face of the jetty. If the wind velocity reaches 25 knots or the current attains a rate of 0.7 knot, as determined by the instruments at the terminal, vessels should prepare to get underway.

Depths—Limitations.—The approach to the terminal has a least depth of 25m. The jetty extends about 0.3 mile N from the shore and provides three berths. The largest berth is located on the E side.

Vessels up to 190,000 dwt, 350m in length, and 19m draft can be accommodated. Tankers (VLCCs) up to 285,000 dwt, with a maximum draft of 18.2m, can be handled.

Aspect.—The approach to the jetty is marked by a lighted buoy and a lighted range.

Regulations.—Tankers of 20,000 dwt and over, carrying crude oil or black oil, must be escorted by a tug while navigating in the fjord to and from Slagenstangen.

Vessels should send an ETA to the terminal 72 hours, 48 hours, 24 hours, and 12 hours in advance.

Contact Information.—See the table titled **Stromstad—Contact Information**.

Anchorage.—Three anchorage areas, which may best seen on the chart, lie centered about 0.6 mile N of the jetty. They have depths of 50 to 60m and are designated A, B, and C. A fourth anchorage area has been reported (2021) to lie 1.4 miles NE of the oil refinery pier on Hauken Bank, in depths of 14 to 16m, sand.

Asgardstrand (59°21'N., 10°28'E.), an extensive small craft harbor with three basins, is located about 2 miles NW of

Stagenstangen.

Slagenstangen (Slagen)—Contact Information	
Slagenstangen Port	
Call sign	Slagenstangen Port Radio
VHF	VHF channel 14
Telephone	47-33-377557 (Marine Supervisor)
	47-33-377560 (Pier Control Room)
	47-33-377574 (OM and S Control Room)
E-mail	slagen.harbour@exxonmobil.com

Horten (59°25'N., 10°30'E.)

World Port Index No. 23750

4.13 Horten, serving an industrial area, is located 6 miles NNW of Slagenstangen Terminal. The port of Horten is divided into outer and inner harbors. The inner harbor, an enclosed bay, lies N of the town and Karljohansvern and is situated on its E side. This harbor contains a large industrial park, shipyards, and a naval museum that was once the headquarters of the Royal Norwegian Navy.

The outer, or commercial, harbor is situated E of the town and extends along the W side of Bastoyrenna, the channel leading W of the island of Bastoy (59°23'N., 10°32'E.).

Tides—Currents.—The normal tidal range is 0.3m, but the water level can be strongly influenced by meteorological conditions. In the area N of the port, the current generally sets S and in the entrance to the inner harbor may attain a rate of 2 knots at springs.

Depths—Limitations.—The outer harbor provides about numerous quays with 14 berths.

A narrow jetty, situated close S of Horten Light, projects about 200m from the shore and serves a tank cleaning plant. It has depths up to 10.8m alongside and can accommodate tankers up to 100,000 dwt for tank cleaning.

Dypvannskaia (the deep water dock), situated 0.2 mile SW of Horten Light, this quay provides a ro-ro ramp at its SW root.

Rustadbrygga (the Rustad pier) projects from the shore 0.4 mile SW of Horten Light and is used mostly by local ferries.

Slagenstangen—Berth Information						
Berth	Length	Depth	Maximum Vessel			Remarks
			LOA	Draft	Size	
Esso Slagen Terminal						
No. 1	120m	20.0m	350m	19.0m	190,000 dwt	Chemicals, clean products, crude, LPG, and bunkers. Berthing length of 350m (including dolphins).
No. 2	162m	11.5m	192m	10.5m	30,000 dwt	Aviation fuels, bio fuel, chemicals, petroleum products, and bunkers. Berths 2 and 3 can accommodate large vessels.
No. 3	30m	11.0m	124m	10.1m	8,000 dwt	LPG and bunkers. Berths 2 and 3 can accommodate large vessels. Displacement: 11,800t.



Horten Ferry Piers—Rustadbrygga

The harbor has facilities for general cargo, ro-ro, and ferry vessels. Vessels up to 175m in length and 8.5m draft can be accommodated.

The inner harbor provides eight berths. The shipyard provides two drydocks. It was reported (2018) the inner harbor entrance is now limited by a least depth of 6.8m, which lies close E of a shoal patch that lies between the breakwater on the NW extremity of Vealos and Ostoya. This is the narrowest part of the entrance channel to the inner harbor.

It is reported that commercial vessels may undergo repairs at the naval shipyard within the inner harbor. Such vessels must enter only with prior permission and under the control of a naval pilot.

Fyllingen, entered close N of Horten Light, is a small craft basin. It is connected to the inner harbor, by a shallow canal. For more berthing information see the table titled **Horten—Berth Information**.

Horten—Berth Information			
Berth	Length	Depth	Remarks
Port of Horten			
No. 1	175m	7.0m	General cargo.
No. 2	35m	7.0m	General cargo and ro-ro.
No. 3	95m	6.0m	General cargo.
Ferry Terminal			
North	—	—	Passengers and ro-ro.
South	—	—	Passengers and ro-ro.

Aspect.—Horten Light is shown from a structure standing on the head of a breakwater, 2.1 miles NW of Bastoy Light (59°23'N., 10°32'E.). A church, with a prominent spire, stands

in the E part of the town.

Pilotage.—See paragraph 4.1.

The Norwegian Pilot Guide

<https://dnl.kartverket.no>

Regulations.—All foreign commercial vessels are prohibited from approaching or entering the inner harbor. Due to this regulation, no description of the inner harbor is given.

Unauthorized approach within 50m of the shore is prohibited in the area surrounding the inner harbor.

Vessel Traffic Service.—See paragraph 4.1.

Contact Information.—See the table titled **Horten—Contact Information**.

Horten—Contact Information	
Port	
Call sign	Horten Harbor Radio
VHF	VHF channels 12 and 16
Telephone	47-33-086400
E-mail	postmottak@hortenhavn.no
Web site	https://www.hortenhavn.no

Anchorage.—Anchorage is available, in depths of 20 to 43m, sand and clay, about 1.3 miles SE of Horten Light. The holding ground is good, but strong winds from S and E cause a considerable sea in this area.

Anchorage can also be taken in depths of 16 to 25m, sand, about 0.4 mile NNW of Bastoy Light or in depths of 16 to 20m, sand, about 0.3 mile NNE of Bastoy Light.

Anchorage is available, in depths of 13 to 15m, sand and

clay, about 0.4 mile NE of the entrance to the inner harbor.

Caution.—Hortenskrakken, a detached drying shoal bank, lies about 0.5 mile NE of Horten Light and is marked by buoys.

4.14 Tofte (59°33'N., 10°34'E.) (World Port Index No. 23823) is located on the SE side of Hurum, 2 miles SW of Filtvet Light. This small harbor, which is protected by a mole, serves a wood pulp and cellulose factory. Vessels up to 200m in length and with a maximum draft of 6.8m draft can be handled. A mooring buoy is situated in the E part of the harbor.

Sagene (59°32'N., 10°32'E.), located 1.3 miles SW of Tofte, serves a cellulose factory. There is a quay, 153m long, with depths of 4.3 to 7.9m alongside.

The chimneys of the factories standing at the above loading places are conspicuous from seaward.

Oslofjorden opens to the W between Horten and the S coast of Hurum, a large peninsula, about 4 mile N. This broad opening consists of a somewhat encumbered basin, which gradually decreases in width. Inland, the terrain is forested and quite hilly. The coasts rise with comparatively steep slopes from the water's edge.

Several small craft harbors and marinas are situated along the shores of the basin. Dramsfjorden extends N for about 15 miles from the N side of this basin.

Breidangen, a water area, lies N of Horten and forms the approach to the entrance to Dramsfjorden. A deep channel leads from Oslofjorden into this area and passes S of Molen Light (59°29'N., 10°30'E.).

Anchorage is available, in depths of 21 to 32m, sand, about 0.5 mile E of Molen Light.

Mulodden Light (59°29'N., 10°21'E.) is shown from a structure standing on the N end of a small promontory extending N from the W side the basin, 4.5 miles W of Molen Light.

Langoya (59°30'N., 10°23'E.), the site of a limestone quarry, lies 1.2 miles NE of Mulodden Light. This elongated island is located at the SE end of a group of islands that encumber the inner part of the basin. Berths and a ro-ro ramp are situated at the SW side of the island. The main berth is 56m long, has depths of 5.5 to 5.9m alongside, and handles limestone. The maximum berthing length is 130m, including dolphins. Landing is prohibited on the island.

Holmestrandsfjorden, a water area, lies W of Breidangen and between Langoya and the W shore of the basin. It provides access to Sandebukta, an inlet located at the NW side of the basin.

4.15 Holmestrand (59°29'N., 10°19'E.) (World Port Index No. 23760) is situated 1 mile NW of Mulodden Light. The town center stands at the foot of a mountain, near the harbor, and several built-up areas extend along the sides of the coastal hills.

Depths—Limitations.—The main berths are situated in the harbor fronting the town. Vessels with a maximum draft of 6.8m can be accommodated. A number of anchorage berths are situated off the town and are used for laying-up vessels of up to 450,000 tons.

The main cargo handled by the port are breakbulk, vegetable oil, passengers, and dry bulk. For more berthing information

see table titled **Holestrand—Berth Information**.

Holestrand—Berth Information		
Berth	Length	Remarks
Holmestrand Terminal		
Ro-Ro	24m	Ro-ro and passengers.
Agribulk Terminal		
Dry Bulk	15m	Grains.
Holmestrand		
Multipurpose	62m	Vegetable oil, breakbulk, and bunkers.

Contact Information.—See the table titled **Holmestrand—Contact Information**.

Holmestrand—Contact Information	
Port	
Telephone	47-33-054-200
Facsimile	47-33-051-216

Selvikbukta (59°34'N., 10°16'E.), the site of a paper plant, is located at the head of Sandebukta. There is concrete quay, 145m long, with depths of 5.5 to 9.3m alongside.

Anchorage is available, in depths of 10 to 30m, clay, good holding ground, at the head of the inlet. Local knowledge is advised.

Caution.—Several submarine cables and pipelines, which may best be seen on the chart, extend seaward from the W side of the basin in the vicinity of Holmestrand.

Dramsfjorden

4.16 Dramsfjorden (59°32'N., 10°24'E.) extends about 15 miles NNW from the entrance and Drammen is situated at its head. The entrance lies between Rodtangen Light and the E extremity of a shallow spit, which extends about 0.2 mile from the mainland shore and is marked by a buoy.

Rodtangen Light (59°32'N., 10°25'E.) is shown from a structure standing on the S side of Hurum, 3.8 miles NW of Molen Light, and indicates the approach to the entrance to Dramsfjorden.

Kroksberget Light (59°34'N., 10°25'E.) is shown from a structure standing on the W side of the fjord, 1.9 miles NNW of Rodtangen Light, and indicates the entrance fairway.

Bjorneskjer Light (59°35'N., 10°26'E.) is shown from a framework structure standing on the N end of an islet lying close off the E side the fjord, 1.5 miles NNE of Kroksberget Light.

Svelvikrenna Sondre Light (59°36'N., 10°25'E.), equipped with a racon, is shown from a structure standing on the W side of the fjord, 0.9 mile NW of Bjorneskjer Light.

Svelvikstrommen (59°37'N., 10°25'E.), a narrow channel, leads through a constriction, about 4.5 miles N of the fjord entrance. Ryggen, a peninsula, extends W across the fjord and reduces the passage to a width of only about 200m for a length of



Svelvikstrommen from S

0.6 mile. This constriction divides the fjord into inner and outer parts. The channel, which is subject to silting, is marked by buoys and indicated by lighted ranges.

Blindesk Light (59°37'N., 10°25'E.) is shown from a structure standing on the W side of the inner part of the fjord, 1.6 miles NNW of Svelvikrenna Sondre Light.

Steinsbaten Light (59°41'N., 10°22'E.) is shown from a structure standing on the W side of the fjord 3.9 miles NNW of Blindesk Light.

Ice.—Generally, the outer part of Dramsfjorden is always free of ice. The inner part, N of Svelvikstrommen, is frozen every winter, but a navigable route is kept open by icebreakers. However, with strong N winds, broken ice can accumulate in Svelvikstrommen.

Tides—Currents.—The normal tidal range is 0.3m, but the water level can be strongly influenced by meteorological conditions. Within the fjord, a low air pressure with a wind from the S may cause the water level to rise; while winds from the N may have an opposite effect. Under extreme conditions, the range of the water level in Svelvikstrommen may be increased by as much as 1.8m.

When, due to wind conditions, the water level rises in Oslofjorden above that in the outer part of Dramsfjorden, an inbound movement of salt water flows N to Svelvikstrommen. When this flow meets the fresh water heading S from the Dramselva River, particularly during an ebb tide, turbulence, with strong swirls, may be caused in the channel. The handling of vessels within the channel may be difficult under these conditions.

Within Svelvikstrommen, under normal conditions, the flow sets N with the rising tide and S with the falling tide. The S or outgoing flow generally lasts longer than the N flow. The outgoing flow can periodically attain a rate of about 5 knots; while the incoming flow attains a rate of 2 to 3 knots.

Local weather conditions greatly affect the normal flow. With strong SW winds, the incoming flow may set N continuously for 24 hours or more; while the reverse occurs during strong N winds. When the Dramselva River is in flood state or after a long period of rain, the outgoing flow may attain a maximum rate of 6 to 8 knots. However, such rates have not been

observed recently since the fairway channel was deepened and straightened.

Under normal circumstances, the flow within the inner part of the fjord is not noticeable. It is only after passing Nostodden, located about 1 mile S of Drammen, that a strong outgoing flow may be expected when the Dramselva River is in flood.

Depths—Limitations.—The fairway leading through Svelvikstrommen is dredged to a depth of 10m over a width of 100m.

Svelvikstrommen is subject to silting and must be continuously dredged in order to maintain depths over a bottom width of 100m. The least charted depth along the centerline of the channel was reported to be 9.4m.

An overhead cable spans the N part of Svelvikstrommen and has a vertical clearance of 46m.

Regulations.—All vessels intending to proceed through Svelvikstrommen should keep watch on VHF channel 16. They should also inform other vessels on that channel, in good time, of their intended time of passage.

Small vessels should keep clear of the dredged channel in Svelvikstrommen when deep-draft vessels are passing through.

A speed limit of 7 knots is in force within the channel at Svelvikstrommen.

Caution.—Generally, vessels should commence their passage through Svelvikstrommen a little before HW as this results in the deepest water and the least water flow.

A ferry, which may be contacted by VHF, crosses the N part of Svelvikstrommen.

Svelvikstrommen is subject to silting and dredges may be encountered within the channel.

Several submarine cables and pipelines, which may best be seen on the chart, lie within the inner and outer parts of Dramsfjorden.

4.17 Svelvik (59°37'N., 10°24'E.) (World Port Index No. 23770) is situated on the W side of Svelvikstrommen and serves a small industrial complex. This small harbor, which is managed by the authorities at Drammen, provides five berths. Vessel with a maximum draft of 6.7m can be accommodated. For more berthing information see the table titled **Sveivik—Berth Information**.

Verket (59°37'N., 10°26'E.) is located on the S side of Ryggen and serves a quarry. There is a quay, 113m long, with depths of 2.1 to 4.3m alongside.

Dramstadbukta, the water area lying close N of Ryggen, provides anchorage to vessels with local knowledge, in a depth of 38m, sand and mud.

Torkopp (59°41'N., 10°19'E.) is located on the W side of the fjord, 1.5 miles WNW of Steinsbraten Light. There is a quay, 59m long, with depths of 10.3 to 17.5m alongside.

Jordfallbukta (59°43'N., 10°21'E.) is located at the E side of the fjord, 1.8 miles NNW of Steinsbraten Light. There is a quay, 35m long, with depths of 5 to 7.5m alongside.

Solumsbukta (59°43'N., 10°16'E.) is located at the W side of the fjord, 3.5 miles NW of Steinsbraten Light. There is a pier, which serves an oil and gas installation, with a depth of 4.8m alongside.

Engersandbukta (59°44'N., 10°18'E.) is located at the NE side of the fjord, 1.5 miles NE of Solumsbukta. There are three quays. The largest is 36m long and has depths of 2.3 to 5.4m

alongside.



Drammen from E

Gullaugbukta (59°45'N., 10°17'E.) lies at the NE side of the fjord, 0.5 mile NW of Engersandbukta. There is a quay, 53m long, with depths of 5 to 5.8m alongside. This is the site of an explosives factory.

Gilhusbukta (59°45'N., 10°16'E.) lies at the N side of the fjord, 0.6 mile W of Gullaugbukta. There is a quay, 78m long, with depths of 3.8 to 6.3m alongside.

Numerous small craft use Dramsfjorden, especially during the summer months. Several small craft harbors and marinas

are situated within the fjord. The principal facilities include the following:

1. Holmsbu (59°33.5'N., 10°25.6'E.).
2. Bokeroya (59°35.5'N., 10°24.6'E.).
3. Hernestangen (59°41.5'N., 10°23.6'E.).
4. Solumstranda (59°42.6'N., 10°16.5'E.).

Drammen (59°44'N., 10°14'E.)

World Port Index No. 23780

4.18 Drammen is situated at the head of Dramsfjorden and serves an extensive industrial area. The town stands on both banks of the mouth of the Dramselva River.

The island of Holmen lies at the mouth of the river and divides it into two parts. Tangenrenna, the channel leading S of the island forms the main section of the harbor. The channel leading N of the island is shallow and obstructed.

Drammen Home Page

<https://drammenhaven.no/english>

Depths—Limitations.—Bridges, with a minimum vertical clearance of 5.5m, span Tangenrenna at the W end of Holmen.

Sveivik—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
Norgips Norge AS							
Cargo	38m	—	—	6.7m	—	—	General cargo and non-metallic and plaster products.
Juve Pukkverk AS							
Cargo	47m	6.0m	—	—	—	—	Gravel and concrete.
Svelviksand AS							
Cargo	—	—	—	—	—	—	General cargo.

Drammen—Berthing Information						
Berth	Length	Depth	Maximum Vessel			Remarks
			LOA	Beam	Size	
Drammen Shipping AS						
Holmen S	484m	7.5m	250m	28.2m	14,382 dwt	Cement, PCC, containers, offshore vessels, steel products, breakbulk, bunkers, and reefer.
Holmen S Ro-Ro	22m	7.5m	250m	22.4m	5,469 dwt	PCC and bunkers.
Furuholmen-Kattegat						
Kattegat	140m	11.0m	180m	23.5m	19,306 dwt	Containers, offshore, breakbulk, and bunkers. 1,118 teu.
Hermod Teigen Lierstranda Industriomrade						
Scrap Metal	78m	6.0m	100.7m	16.0m	5,535 dwt	Scrap metal, steel products, breakbulk and bunkers.

Drammen—Berthing Information						
Berth	Length	Depth	Maximum Vessel			Remarks
			LOA	Beam	Size	
Lierstranda-Tommer Terminalen						
Lier-Njard E	90m	6.0-10.0m	119.3m	16.5m	6,796 dwt	Wood chips and bunkers.
Lier-Njard W	90m	6.0-10.0m	119.3m	16.5m	6,796 dwt	Wood chips and bunkers.
Risgarden						
Risgarden	151m	8.0m	200m	32.2m	14,382 dwt	PCC, bunkers, and livestock.
Ro-Ro	30m	8.0m	200m	18.8m	4,443 dwt	PCC and bunkers.
Tagen						
Kranbrygga	202m	6.0m	53m	8.0m	727 dwt	Breakbulk and bunkers.
Langbrygga	255m	6.5m	166.1m	23m.0	19,306 dwt	Breakbulk and bunkers.
Myrakaia	146m	6.0m	118.5m	15.2m	6,663 dwt	Breakbulk and bunkers.
Tjomekrankaia	160m	6.0m	111.6m	16.8m	4,200 dwt	Breakbulk and bunkers.
Tollbukaia	110m	6.0m	89.4m	13.5m	3,982 dwt	Breakbulk and bunkers.
Equinor						
Holmen S Oil	70m	7.5m	140m	18.0m	20,000 dwt	Petroleum and bunkers. Displacement: 26,000t.

The port provides about 3,000m of total berthage. There are six berths located at the S side of Tangenrenna. The main berths are Langbrygga and Tjomekrankaia.

There are nine berths located at the N side of Tangenrenna. The port has facilities for general cargo, container, bulk, tanker, ro-ro, ferry, and automobile carrier vessels. Vessels up to 20,000 dwt, 250m in length, and 32.2m beam can be accommodated. Vessels are restricted in size by the controlling depth in Svelvikstrommen, as described in paragraph 4.17.

A large shipyard, with two floating docks, is situated in the port. It is fronted by about 500m of quayage. For more berthing information see the table titled **Drammen—Berth Information**.

Pilotage.—See Pilotage under General Remarks (paragraph 4.1).

Regulations.—In addition to participating in the Oslofjorden VTS system, described in paragraph 4.9, all inbound vessels must report to Horten Control Center on VHF channel 19 when passing Molen Light (59°29'N., 10°30'E.). The VTS Control Center will then give permission to proceed to the port and provide traffic information. Vessels should also make a final report when berthed.

Inbound and outbound vessels generally agree between themselves as to which will pass through Svelvikstrommen first.

Contact Information.—See the table titled **Drammen—Contact Information**.

Drammen—Contact Information	
Port	
Call sign	Drammenhavne Radio

Drammen—Contact Information	
VHF	VHF channels 11, 12, 16, and 19
Telephone	47-32-208-650
Facsimile	47-32-208-651
E-mail	firmapost@drammenhavn.no
Web site	https://www.drammenhavn.no

Anchorage.—Vessels without a berthing assignment may anchor E of Holmen, in a depth of about 30m, sand and clay, good holding ground.

Oslofjorden—East Side

4.19 The E side of Oslofjorden E side, between Stromtang Light (59°09'N., 10°50'E.) and Filtvet Light (59°34'N., 10°37'E.), is fringed by numerous islands, islets, rocks, and areas of foul ground. Numerous channels lead between these off-lying dangers.

The main inner passage, used by small vessels with local knowledge, leads NNW through Ytreleia (59°11'N., 10°45'E.) and passes E of Sondre Missingen. It continues NNW through Rauerfjorden (59°14'N., 10°43'E.) and Krokstadleira (59°17'N., 10°42'E.), passing E of Rauer. The route then leads between the mainland coast and the off-lying islands of E Store Sletter, Eldoya, and Kolen. It connects with the main channel in the fjord about 2 miles ENE of Medfjordbaen Light (59°20'N., 10°34'E.). The fairway is very narrow in places and is reported to have a least depth 15m.

Garnholme Light (59°11.5'N., 10°45.8'E.) is shown from a structure standing on the S side of an islet lying 2 miles NE of

Sondre Missingen. A conspicuous monument, surmounted by an anchor, is located close N of this light.

Numerous small harbors and marinas, used only by small craft and fishing vessels, are situated along this stretch of the fjord. The main facilities include the following:

1. Missinghavn (59°10.2'N., 10°42.6'E.).
2. Slevikkilen (59°11.6'N., 10°48.8'E.).
3. Hankohavn (59°12.0'N., 10°46.5'E.).
4. Hankosundet (59°12'N., 10°48'E.).
5. Saltnessund (59°17'N., 10°45'E.).
6. Kurefjorden (59°20'N., 10°44'E.).
7. Rorvika (59°19.5'N., 10°41.0'E.).
8. Larkollen (59°20'N., 10°40'E.).
9. Evjesundet (59°21.5'N., 10°40.0'E.).
10. Fulevik (59°23'N., 10°39'E.).
11. Engelsviken (59°15'N., 10°44'E.).
12. Son (59°31'N., 10°41'E.).

4.20 Jeloya (59°27'N., 10°38'E.), rising to a height of 138m, is a large island lying close off the E side of the fjord. Its W side is fronted by foul ground and shallow detached reefs, which may best be seen on the chart.

An isthmus connects the SE side of this island to the mainland and Verlebukta, a bay, lies on its S side.

Mossesundet (59°28'N., 10°40'E.), a narrow inlet, lies between the mainland and the E side of Jeloya. Mosskanalen, a canal, leads through the isthmus and connects the S end of Mossesundet to Verlebukta. The canal is spanned by a bascule bridge, which has a vertical clearance of 4.5m and is permanently closed. It is 10m wide and has a depth of 4m.

Verlebrygga Light is shown from a structure standing at the head of a pier located at the SE end of the canal.

Saueholmenene Light (59°31'N., 10°40'E.) is shown from a structure standing on the W side of the southernmost islet of a chain of islets lying close off the E side of the fjord, 4 miles SSE of Filtvet Light.

Directions.—Mossesundet is entered between Saueholmenene Light and the E side of Bevoya, an islet lying close off the N end of Jeloya, 0.7 mile W. The approach track leads in a SE direction, using the white sector of the light, and passes NE of the dangers lying off the NW side of Jeloya.

The approach to Verlebukta leads in a NNE direction, using the white sector of Verlebrygga Light, and passing WNW of Revlingrevet Light (59°24'N., 10°38'E.).

Moss (59°26'N., 10°40'E.)

World Port Index No. 23830

4.21 Moss stands around the isthmus connecting Jeloya to the mainland. The town lies about 26 miles N of the entrance to Oslofjorden. As a result, the harbor contains two harbor areas which lie at either end of the Mosskanalen, which bisects the isthmus. The S harbor lies at the head of Verlebukta and the N lies at the head of Mossesundet.

The port serves an industrial area and is a terminal for the ferry that runs to Horten. A small river flows into the E side of Mossesundet from a series of lakes lying E of the town.

The port also includes the facilities situated at **Kambo** (Mossesundet at Kambo) (59°28'N., 10°41'E.) which lies at the E side of the inlet 2.7 miles N of the head.

Winds—Weather.—The N part of the harbor is sheltered from all winds. However, the S part of the harbor is open to SW gales and the working of cargo may be interrupted.

Ice.—During severe winters, ice forms in both parts of the harbor, but the channels are normally kept open by icebreakers.

Tides—Currents.—The tidal range is normally about 0.3m, but, during SW gales, the water level may rise by as much as 2m.

Depths—Limitations.—The S part of the harbor provides eight berths. The principal berths are East Verlebrygga and Container Terminal.

Moss—Berth Information						
Berth	Length	Depth	Maximum Vessel			Remarks
			LOA	Draft	Size	
Moss Havn Terminal						
No. 1 Vaerla Ost	80m	10.2m	—	—	—	General cargo.
No. 2 Vaerla Ost	80m	9.0m	—	—	—	General cargo
No. 3 Vaerla Ost	80m	8.0m	—	—	—	General cargo.
No. 4 Ro-Ro	90m	7.5m	—	—	—	General cargo and ro-ro.
No. 5 Gernerkaia	146m	9.0m	—	—	—	General cargo.
No. 6	34m	10.8m	—	—	—	General cargo and containers.
No. 7 Vaerla Syd	50m	10.0m	—	—	—	General cargo.
Ro-Ro	17m	—	—	—	—	Passengers and vehicles.
Aker Solution Terminal						
Wharf	158m	—	—	—	—	General cargo and containers.
Felleskjøpet East West Terminal						
Dry Berth	144m	9.7-11.7m	—	—	—	Feedstuffs.

Moss—Berth Information						
Berth	Length	Depth	Maximum Vessel			Remarks
			LOA	Draft	Size	
Latmannen Cerealia Terminal						
No. 1	152m	—	—	—	—	Flour, grain, and pasta.
GC Rieber Salt Terminal						
Multipurpose	124m	—	—	—	—	Wet bulk, dry bulk, and general cargo.
NSO Central Plant Terminal						
NSO	61m	14.7-17.7m	180m	15.0m	30,000 dwt	Petroleum products.
Dynea Terminal						
No.1	75m	—	—	—	—	Petroleum products.



Moss from S

The N part of the harbor at Moss provides ten berths and is the site of a shipyard.

Kambo, in the N part of the harbor, provides four berths. The principal berths are Norsk Gulf Oil Terminal and Felleskjøpet Bulk Berth. Tankers may also be anchored off the terminal and secured by the stern.

There are facilities for general cargo, bulk, ro-ro, ferry, tanker, and container vessels. Vessels up to 20,000 dwt and 9.5m draft can be accommodated in the S part of the harbor; while vessels up to 28,000 dwt and 11m draft can be accommodated in the N part. For more berthing information see the table titled

Moss—Berth Information.

Aspect.—A light is shown from a structure standing at the head of a pier located at the SE end of the canal. A conspicuous church stands about 0.5 mile NNE of the light. A prominent chimney is situated on the E side of the N part of the harbor about 0.9 mile NNE of the light.

Anchorage.—Anchorage is available, in depths of 20 to 30m, mud, at the head of Mossesundet. Anchorage is also available, in depths of 30 to 47m, mud, at the E side of the inlet about 0.2 mile N of the river mouth.

Caution.—A wreck, with a least depth of 8m, lies in the approaches, about 0.3 mile SW of Verlebrygga Light.

In Verlebukta the direction of buoyage is from S to N; while

in Mossekanalen and Mossesundet the direction is from N to S.

Indre Oslofjorden

4.22 Indre Oslofjorden, the N part of the fjord, consists of the waters lying N of Filtvet Light (59°34'N., 10°37'E.). This section of the fjord extends N for about 20 miles to Oslo.

The lower and upper reaches of this section are comparatively wide, but the fjord narrows about 6 miles N of Filtvet Light in the vicinity of several islets. At the NW end of this section, a series of islets extends, in remarkable parallel rows, across the head of the fjord and obstructs the navigable passage. Bonnefjorden, a continuation of Indre Oslofjorden, extends S for about 10 miles from the vicinity of Oslo.

Vestfjorden (59°42'N., 10°33'E.), a branch passage, leads along the W side of Indre Oslofjorden. It is obstructed by several dangers at the S end and does not provide a practicable route to Oslo or the N part of the fjord.uruholmen

Numerous small harbors and marinas, used only by small craft and fishing vessels, are situated along both sides of this section of the fjord.

The main facilities include the following:

1. Husvikholmen (59°40.5'N., 10°37.5'E.).
2. Storsand (59°39'N., 10°36'E.).
3. Furuholmen (59°40.5'N., 10°33.9'E.).
4. Hjelp (59°41.6'N., 10°31.9'E.).
5. Tajebukta (59°42'N., 10°34'E.).
6. Bjornhuebukta (59°43.0'N., 10°33.3'E.).
7. Naernesbukta (59°45.7'N., 10°29.9'E.).
8. Vollenbukta (59°49'N., 10°30'E.).

The main small craft facilities at the NW side of the head of the fjord include the following:

1. Leangbukta (59°50'N., 10°29'E.).
2. Holmen (59°51.5'N., 10°29.9'E.).
3. Nesbukta (59°51.7'N., 10°30.4'E.).
4. Holtekilen (59°54'N., 10°36'E.).
5. Langarsundet (59°51'N., 10°33'E.).
6. Boroya (59°53'N., 10°33'E.).
7. Sandvika (59°53'N., 10°32'E.).
8. Kavringen (59°50.8'N., 10°38.7'E.).

Regulations.—Vessels, when underway within Indre Oslofjorden, between Filtvet Light and Oslo, must proceed at a moderate speed in order to prevent wash damage or cause in-

convenience to vessels berthed alongside. A maximum speed restriction of 5 knots is in effect at a distance of 150m from land or islands along the entire coastline of Hurum municipality to the boundary with Oslo municipality. This restriction includes Royken, Asker and Baerum municipalities.

A large part of the main route leading through Indre Oslofjorden is designated as a Precautionary Area and may best be seen on the chart. All vessels must navigate with extreme caution when passing through this area.

Directions.—For information concerning the main shipping route through Indre Oslofjorden, see Directions under Oslofjorden in paragraph 4.9.

4.23 Halvorshavn (59°35'N., 10°37'E.), an oil depot, is situated about 0.7 mile N of Filvet Light. There is a quay, 70m long, with depths of 10.7 to 12.2m alongside, which can handle tankers up to 35,000 dwt. A number of conspicuous white tanks stand at the depot.

Drobak (59°40'N., 10°38'E.) (World Port Index No. 23820), a small harbor, is situated about 0.4 mile NNW of Elle Light. It is the site of a marine biological station. The harbor provides six main berths. The largest is 45m long and has depths of 2.3 to 3.5m alongside.

Engene (59°41'N., 10°32'E.), the site of an explosives factory, is located on the SW side of Vestfjorden about 3 miles NW of Drobak. It lies at the SE side of Saetrepollen, a large harbor area. The main quay is 36m long and has depths of 9.2 to 9.4m alongside.

Caution.—Entry to Engene is sometimes prohibited for safety reasons when testing of explosives is being carried out.

4.24 Fagerstrand (59°44'N., 10°35'E.) (World Port Index No. 23817), an oil depot, is located on the E side of the fjord about 0.6 mile NNE of Aspond Light. Several conspicuous tanks stand in this vicinity. The depot provides berths. The main facility consists of a jetty, 200m long, with depths of 5.1 to 11.6m alongside. The Equinor Nordre Kai located at the Equinor terminal is 70m in length and handles clean products. Vessels up to 25,000 dwt, 160m in length, and 10.3m draft can be accommodated in the depot and alongside Equinor Nordre Kai Terminal.

Slemmestad (59°47'N., 10°30'E.) is located at the W side of the fjord. It is the site of a prominent silo station (a former cement factory). The port can accommodate vessel with up to 7m drafts. The Cement Quay is 180m long and has depths of 7.2 alongside. Cement is handled at the berth.

4.25 Granerudstoa (59°47'N., 10°36'E.), a former oil depot, is situated 2.2 miles S of Steilene Light and is the site of a repair yard. A number of conspicuous tanks stand in the vicinity of the yard. The harbor provides 12 berths. The largest berth lies on the NW side of the southernmost of two angled jetties. It 160m long and has depths of 9.6 to 15.4m alongside.

Bjorkas (59°47.6'N., 10°29.9'E.) is situated on the W side of the fjord about 0.5 mile N of Slemmestad. A quay, located on the N side of a cove, is 105m long and has depths of 7.9 to 10.1m alongside.

Bunnefjorden (59°49'N., 10°44'E.), the continuation of the head of Oslofjorden, extends SSE for about 9 miles from the vicinity of Nesoddtangen Light. This inlet narrows near its

head, which is spanned by an overhead cable with a vertical clearance of 34m.

This inlet contains several small craft harbors but, overall, is of no significance to commercial ocean-going vessels.

Lysakerfjorden (59°54'N., 10°39'E.) lies close W of Oslo and 1.3 miles N of Nesoddtangen Light. This inlet, which is entered between two peninsulas, continues NE from its head into Bestumkilen, a shallow bay. Several small craft harbors and marinas are situated within the inlet and its continuation. Oslo International Airport is situated on the peninsula at the W side of the inlet.

Lysaker (59°54.7'N., 10°38.6'E.), an oil depot, is situated at the W side of the head of the inlet and serves a chemical complex. There are five berths. The main berth is 89m long and has depths of 9.8 to 10.5m alongside. Vessels up to 35,000 dwt can be handled.

Rolfstangen (59°53.5'N., 10°38.0'E.), an oil depot, is situated at the W side of the inlet and serves the airport. The main berth is 40m long and has depths of 7.3 to 9.3m alongside.

Caution.—A seaplane operating area extends along the W side of Lysakerfjorden. Entry into the inlet is controlled during landings and take-offs.

Several submarine cables and pipelines, which may best be seen on the chart, lie within Lysakerfjorden.

Approaches to Oslo

4.26 The direct route to Oslo from the vicinity of Nesodtangen Light, which has been described in paragraph 4.9, is obstructed by a group of islands and shoals, which fronts the harbor and may best be seen on the chart.

Two principal routes lead through the group of islands and shoals to the harbor facilities. The third route, or middle channel, which leads between the SE side of Lindoya (59°53.4'N., 10°42.8'E.) and the NW side of Gressholem, is narrow, comparatively shallow, and not recommended for use.

Western Channel (59°53.6'N., 10°41.5'E.), a main route, lies between the S side of the Bygdoy Peninsula and the N side of the island of Nakkholmen, about 0.4 mile SSE. It is approached by passing NW of Nesodtangen Light.

The channel leads between Dyna Light, marking a shoal lying on the N side, and Koppernaglen Light, marking a shoal lying on the S side. It has a minimum width of about 220m, between the lights, and a least depth of 12m.

Dyna Light (59°53.7'N., 10°41.3'E.) is shown from a prominent building, 12m high, standing on a rock.

Southern Channel (59°52.6'N., 10°43.1'E.), a main route, passes between the N side of Nordre Langoya, marked by a light, and the S side of Rambergoya, marked by a beacon. It is approached by rounding the dangers fringing Nesodtangen Light.

This route continues in a NE direction through Bleikoyundet to Eastern Harbor. Vessels may also round the E end of Rambergoya and continue in a NNW direction through Springeren (59°53.3'N., 10°43.6'E.) to Western Harbor.

Vessels must not exceed a speed of 5 knots within Bleikoyundet. Southern Channel and both of the continuing fairways have a least depth of 17m.

An alternative track leading NE and then NNW to the S entrance of Springeren passes between the S side of Husbergoya



Dyna Light

(59°51.7'N., 10°42.9'E.) and the N side of Nordre Skjaerholmen, 0.4 mile SSE. Because this route avoids the sharp turn around the E end of Rambergoy, it is used by deep-draft vessels, with high freeboards, during strong winds.

Oslo (59°54'N., 10°45'E.)

World Port Index No. 23810

4.27 Oslo, the capital of Norway and a popular resort, is situated on the NE side of the head of Oslofjorden. The extensive city spreads out over the greater part of the slopes rising gently inland to heavily forested background hills.

The harbor fronts the city and extends for about 5 miles along the offshore area. It is protected from S by a group of islands and rocky shoals.

Oslo Port Home Page

<https://www.oslohavn.no/en>

Tides—Currents.—The tidal range in the harbor is negligible, being about 0.3m at springs and 0.2m at neaps.

Meteorological conditions have the greatest influence on the water level. Winds from N reduce the level and winds from S increase it. The highest water level observed was 1.9m above normal and the lowest level observed was 1.1m below the normal.

The current flows in a counterclockwise loop through the harbor area. It is very weak and usually has little significance for navigation.

Depths—Limitations.—Western Harbor is situated in the N part of the port and includes the facilities bordering the water areas of Frognerkilen and Pipervika, which lie 0.8 mile NNE and 1.4 miles ENE, respectively, of Dyna Light.

Eastern Harbor extends S from Western Harbor along the E side of the port. It includes the water area of Bjorvika at its N end. Sjursoya, an oil terminal, is situated near the S end of Eastern Harbor.

The port provides principal commercial quayage. Western Harbor provides 17 berths. The main facilities include Filipstadkaien and Sondre Akershuskaien.

Eastern Harbor provides 14 berths. The main facilities in-



Oslo—Western Harbor



Oslo—Eastern Harbor

clude Revierkaien and Sorengutstikkeren.

Sjursoya Oil Terminal (Ekeberg Oil Terminal) has 234m of total quayage and provides eight berths.

The port has extensive facilities for general cargo, container, ro-ro, tanker, bulk, cruise, and ferry vessels. Vessels up to 50,000 dwt, 360m in length, 12m draft, and 37.5m beam can be accommodated. For berthing information see the table titled

Oslo—Berth Information.

Large marinas are situated at the NE side of Hovedoya and within Frognerkilen.

Aspect.—Trefoldighets Church (59°55.0'N., 10°44.7'E.) stands in the city, 2.2 miles NE of Dyna Light, and is conspicuous. It has a large green dome over the center which is surmounted by a small thin steeple. Two small brick towers are situated at its SW and NW comers.

Var Frelzers Church, situated about 0.3 mile S of Trefoldighets Church, is conspicuous. It has a tower, surmounted by a tall weather vane, rising above the trees.

The Palace stands 0.5 mile W of Trefoldighets Church and is prominent. It consists of a light-colored stone building, with a dark roof, surmounted by a tall flag staff.

The Town Hall stands about 0.5 mile SW of Trefoldighets Church and is prominent. It has two tall brick-colored towers.

Oslo—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
Akershuskaia Syd Terminal							
Cruise	236m	10.5m	360m	10.3m	32.2m	10,000 dwt	Cruise, ro-ro/lo-lo, and bunkers. 92,409 gt.
Container Terminal (South)							
Ormsundkaia	282m	9.3-9.6m	179.9m	—	32m	38,649 dwt	Containers and bunkers. 604 teu.
Embra Cement Terminal							
Nordre Kongshavnkal	140m	6.0m	111.4m	—	17.3m	6,050 dwt	Cement, bulk leca, others, and bunkers.
Filipstad Terminal							
General Cargo	468m	8.7-9.1m	345m	—	36.4m	23,889 dwt	Cruise, o-ro/lo-lo, breakbulk, road salt, and bunkers. 73,358 gt.
Gronlia Syd Terminal							
Dry Cargo	262m	5.9-8m	98.8m	—	15.8m	4,303 dwt	Scrap metal, steel products, breakbulk, and bunkers.
Hjortnes Terminal							
Cruise	173m	6.5m	154.5m	—	22.7m	8,853 dwt	Cruise vessels, bunkers, and ro-pax. Berthing length of 230m (including dolphins).
Kneppeskjaer Terminal							
Lower E	120m	6.4-8.0m	107.7m	—	17.0m	4,355 dwt	Ro-ro/lo-lo, breakbulk, and bunkers.
Upper E	148m	6.4-8.0m	128.8m	—	18.8m	4,443 dwt	PCC and bunkers.
West	165m	6.4-8.0m	129m	—	18.0m	7,500 dwt	Ro-ro/lo-lo, breakbulk, and bunkers.
Revlerkala Terminal							
Passenger	364m	10.0m	300m	8.4m	37.5m	14,601 dwt	Cruise, ro-ro/lo-lo, and bunkers. 115,875 gt.
Sjursoya Container Terminal							
Sonde Sjursoykai	665m	12.0m	179.5m	12.0m	28.0m	29,881 dwt	Containers and bunkers. 1,304 teu.
Sjursoya Multi-Bulk Terminal							
Nordre Sjursoykai	395m	7.0-10.7m	174.1m	—	23.0m	20,396 dwt	Animal feeds, cement, fertilizer, molasses, salt, breakbulk, and bunkers.

Oslo—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
Unicon Terminal							
Sondre Kongshavnkal	160m	5.0m	74.1m	—	9.8m	1,130 dwt	Cement, sand, other, shingle gravel, project/heavy, break-bulk, and bunkers.
Utstikker II Terminal							
Cruise	162m	6.1-7.6m	—	—	—	—	Cruise, fast ferries, and bunkers.
Utstikker III Terminal							
Grain	120m	7.8-8.3m	128.3m	—	15.4m	5,052 dwt	Grain and bunkers.
Vippetangen Terminal							
Cruise	202m	6.5-9.0m	252m	8.0m	14.5m	—	Grain, cruise, fishing, breakbulk, and bunkers.
Ekeberg Oljelager Terminal							
Ekeberg East	55m	10.0-12.9m	188.3m	11.0m	32.2m	50,000 dwt	Chemicals, petroleum products, and bunkers. Berthing length of 168m (including dolphins).
Ekeberg West	55m	10.0-12.9m	177m	11.0m	26.0m	50,000 dwt	Chemicals, petroleum products, and bunkers. Berthing length of 168m (including dolphins).
Uno-X Terminal							
Bunkering	70m	12.0m	250m	10.0m	—	36,000 dwt	Closed. Clean products and bunkers.



Oslo—Sjursoya

A prominent stone tower, with a green conical roof, is built into the outer wall of the fort standing at Akershus, about 0.7 mile SSW of Trefoldighets Church.

A prominent navigation school stands at the E side of the

harbor about 1.2 miles SSE of Trefoldighets Church. It consists of a large four-sided building, with towers at each corner, situated on a scrub covered hill.

Pilotage.—For information concerning pilotage, see the Pilotage paragraph under General Remarks (paragraph 4.1).

Regulations.—For details of the Oslofjorden VTS system, see Regulations under Oslofjorden in paragraph 4.9.

All vessels should send an ETA by VHF to the Port Authority 1 hour prior to arrival.

Tankers over 35,000 dwt are not permitted to enter the harbor.

Tankers with a draft over 9.1m may only enter the harbor during daylight.

Rules are in effect concerning the speed of vessels such that, in general throughout the harbor, speed should never become so great as to endanger shoreside facilities or other vessels. A maximum speed restriction of 5 knots is in effect at a distance of 150m from land or islands along the entire coastline of Oslo municipality. The speed limit is 25 knots in all other waters.

Contact Information.—See the table titled **Oslo—Contact Information**.

Anchorage.—Anchorage, for vessels without a berth assignment, is available in areas close N of the N end of

Lindøya (59°53.4'N., 10°42.8'E.) and SW of Eastern Harbor.

Oslo—Contact Information	
Port Authority	
Telephone	47-21-802180
E-mail	postmottak@hav.oslo.kommune.no
Web site	https://www.oslohavn.no
Port Control	
Call sign	Oslo Traffic
VHF	VHF channel 15
Telephone	47-91-799900 (mobile)
E-mail	trafikksentralen@ohv.oslo.no

An anchorage area, centered on position 59°52'45"N, 10°44'45"E is situated NE of Nordre Langøya, with depths of 24 to 65m, mud and clay bottom. Vessels can anchor, in depths up to 20m, close NE of the E end of Hovedøya (59°53.6'N., 10°44.0'E.). The deepest anchorage, with a depth of 24m, lies about 0.3 mile WNW of the islet of Kavringen (59°54.0'N., 10°43.3'E.).

Five designated anchorage areas lie in Ormoysanden, the protected waters S of Sjursoya and NE of Langøya, in depths from 32 to 70m, mud and clay. They are best seen on the chart.

An anchorage, used mostly by cruise vessels and warships, lies in a depth of 22m, mud, about 0.3 mile NE of Kavringen.

Caution.—Several submarine pipelines and cables lie within the harbor area and may best be seen on the chart.

A number of mooring buoys are situated throughout the harbor area and may best be seen on the chart.

A number of small ferries may be encountered within the harbor area.

Oslofjorden—Southeast Environs

4.28 The SE environs of Oslofjorden consist of that part of the mainland extending from Stromtangen Light (59°09'N., 10°50'E.) to Sekken (Sacken), a waterway located at the border between Norway and Sweden, about 12 miles SE.

Hvaler is the collective name of the extensive group of islands and islets, which may best be seen on the chart, that front this stretch of the mainland. The principal islands of this group, from SE, are Herfol, Sondre Sandoy, Nordre Sandoy, Kirkoy, Asmaløya, Akerøya, Spjaerøy, Vesterøy, and Papperøy. Krakerøy, a large wooded island, extends N between the N side of Vesterøy and the mainland in the vicinity of Fredrikstad. Numerous rocks and shoals fringe the group and may best be seen on the chart.

Ringdalsfjorden and Iddefjorden, a continuation, lead ENE and SE for about 12 miles from the E side of the bight that indents this part of the mainland. These fjords extend inland and are shared between Norway and Sweden.

The main commercial ports in this area include Halden (59°07'N., 11°23'E.), Fredrikstad (59°12'N., 10°57'E.), and Sarpsborg (59°16'N., 11°06'E.). The administrative authority which operates the ports of Fredrikstad and Sarpsborg is known as Borg

Harbor.

Numerous small craft harbors and marinas, some of which were formerly used by fishing vessels, lie within the Hvaler group. The principal facilities include:

1. Vikershavn (59°02'N., 10°57'E.).
2. Skipstadhavn (59°03.7'N., 10°57.4'E.).
3. Korshavn (59°04.5'N., 11°00.0'E.).
4. Utgardskilen (59°04.6'N., 10°52.3'E.).
5. Tislerkilen (58°59'N., 10°57'E.).
6. Papperbukta (59°07'N., 10°50'E.).
7. Stokken (59°07.5'N., 10°55.1'E.).
8. Oyenkilen (59°10.3'N., 10°50.8'E.).
9. Fjellskilen (59°11'N., 10°52'E.).
10. Vikerkilen (59°11.2'N., 10°52.6'E.).
11. Bolingshavn (59°03.5'N., 11°03.2'E.).
12. Monsterboden (59°08'N., 10°57'E.).
13. Trolldalen (59°08.6'N., 10°56.5'E.).
14. Brattesto (59°03.4'N., 10°55.1'E.).
15. Sand (59°05'N., 10°56'E.).
16. Kjellvika (59°04.5'N., 10°53.4'E.).
17. Herfolrenna (59°00.2'N., 11°03.4'E.).
18. Skjaerhalden (59°01.5'N., 11°02.4'E.).
19. Skjeberg (59°11.5'N., 11°10.9'E.).
20. Nedgarden (59°01'N., 11°04'E.).
21. Buvika (59°01.5'N., 11°06.4'E.).
22. Grimsoykilen (59°09'N., 11°12'E.).
23. Delebekk (59°11'N., 11°09'E.).

Aspect.—The islands in the Hvaler group are comparatively low and are formed of grayish-yellow stone. The outer islets are bare while the larger inner islands are often wooded. Although the region at the inner side of the group is highly populated, almost no built-up areas are visible from seaward.

The border between Norway and Sweden, which is indicated on the chart, extends in a WSW direction from the entrance to Sekken (58°59'N., 11°05'E.).

4.29 Borg Harbor (59°12'N., 10°57'E.) also known as Borg Havn, is situated at the mouth of River Glomma and incorporates the ports of Fredrikstad and Sarpsborg.

Borg Harbor Home Page

<http://www.borghavn.no>

Depths—Limitations.—The port is located at the mouth of Oslofjord on the SE coast of Norway. Dry cargo, general cargo, silicon, chemicals, timber, steel, and oils are handled.

Vessels up to 300m in length, 9.9m in draft, and 29m beam can be accommodated. For more information see the table titled **Borg Harbor—Berth Information**.

Pilotage.—Pilotage services for Borg Harbor (Fredrikstad and Sarpsborg) is compulsory for all vessels and should be ordered through Safe Sea Net (SSN). Alternatively, the Horten Pilot Booking Center can be used, but may incur additional charges. For further information, see paragraph 4.1.

Pilots can be contacted by VHF and board in position 59°01'N, 10°56'E between Trestenene Light and Vidgrunnen Light.

Regulations.—Vessels should send an ETA to the Borg Harbor Control Center 24 hours, 12 hours, and 6 hours prior to ar-

rival.

Most of the SE environs of Oslofjorden lie within the restricted inner (internal) waters of Norway. Entry of foreign commercial vessels into the inner (internal) waters is subject to certain regulations and procedures. For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

The SE environs lie within Sector 1 of the Oslofjorden VTS system. For further details, see Regulations under Oslofjorden in paragraph 4.9.

A maximum speed restriction of 5 knots is in effect at a distance of 150m from land or islands along the entire coastline of Sarpsborg municipality to the border with Sweden.

For Hvaler municipality, between June 1 and August 31, a speed limit of 5 knots is in effect in the following waters: Holtekilen, Romsundet, Edholmen/Stafsengkilen, Bolingshavn, Makosundet, Lisundet, Odegardskilen, and Skjelsbusundet. These waters are found along the islands of Vesteroy,

Asmaloy, and Kirkoy.

Contact Information.—See the table titled **Borg—Contact Information**.

Caution.—Several submarine cables and pipelines, which may best be seen on the chart, extend between the islands in the Hvaler group and the mainland.

Borg—Contact Information	
Port	
Call sign	Borg Port Control
VHF	VHF channels 12 and 16
Telephone	47-69-358900
E-mail	firmapost@borg-havn.no
Web site	https://www.borg-havn.no

Borg Harbor—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
Passenger							
Passenger	68m	—	108.5m	—	16.4m	1,836 dwt	Cruise vessels, ro-pax, and bunkers. 4,073 gt.
Sarpsborg Terminal							
Alvim	470m	7.3m	119.3m	—	16.5m	6,796 dwt	Bunkers and reefer. 5,335 gt and 336 teu.
Container Terminal							
Ora Main Dock No. 1	340m	12.0m	197m	—	30.5m	37,140 dwt	Clean products, ro-ro/lo-lo, containers, project/heavy, breakbulk, multipurpose, bunkers, and reefer. Displacement: 46,970t, 33,313 gt, and 1,457 teu.
Greaker Terminal							
Greaker	262m	—	117.1m	—	19.0m	8,476 dwt	Dirty products, LNG, others, wood chips, breakbulk, bulk cargo, multipurpose, and bunkers. Displacement: 12,275t, 6,026 gt, and 336 teu.
Lilleborg Quay- Fredrikstad							
Denofa	585m	10.0m	200m	9.9m	32.0m	39,919 dwt	Continuous berthing length of 1,165m. Chemicals, others, breakbulk, multipurpose, and bunkers. Displacement: 50, 251t, 25,546 gt, and 300 teu.
Oera Quay- Frdrikstad							
No. 2 Ora	775m	9.5m	210m	—	32.2m	24,485 dwt	LNG, breakbulk, multipurpose, bunkers, and reefer. Continuous berthing length of 1,165m. Displacement: 35,127t, 55,598 gt, and 668 teu.
Borregard							
Melloes	102m	—	100m	5.6m	16.5m	5,846 dwt	Chemicals and bunkers. Displacement: 8,353t.

A number of overhead cables and bridges, which may best be seen on the chart, span the narrow passages lying between the islands of the Hvaler group and connect the group to the mainland.

4.30 Struten Light (59°07'N., 10°45'E.), previously described in paragraph 4.3, is shown from an islet lying at the NE end of the Sostrene group and marks the W limit of the dangers in the approaches.

Strutskrakkene, formed by two isolated shallow shoal patches, lies 1.3 miles NNE of the light and is marked by a buoy.

Seikrakk, a detached shoal patch, lies about 2.8 miles SSE of the light. It has a least depth of 3.5m and is marked by a buoy. This shoal may be passed on either side.

Torbjornskjaer Light (59°00'N., 10°47'E.), previously described in paragraph 4.2, is shown from an islet and marks the SW limit of the dangers in the approaches.

Skjerskrakkene, a shoal bank with a least depth of 5m, lies at the seaward extremity of the dangers extending up to about 1 mile NW of the light and is marked by a buoy.

Mefjordbaen, a shoal bank with a least depth of 10m, lies about 1.7 miles N of the light and is marked by a buoy.

Vessels approaching from W should pass well to the N of these dangers.

Between Torbjornskjaer Light and the border between Norway and Sweden, about 5 miles SE, there are a few islets, many shoal patches, and hundreds of rocks, both awash and submerged. Heia, the largest islet, lies 3.5 miles SE of Torbjornskjaer Light and is marked by a beacon, 6m high. A signal mast stands in the NE part of this islet. Kuskjaer, a rock, lies about midway between Heia and Torbjornskjaer Light and is marked by a beacon. During heavy weather, the sea breaks over all of these dangers.

Several narrow channels, used by small vessels in good weather, lead through these dangers but local knowledge is required.

4.31 Stromtangen Light (59°09'N., 10°50'E.), previously described in paragraph 4.4, is shown from the S end of an islet lying close off the mainland.

Stangeskjaer Lighted Beacon (59°08'N., 10°53'E.) is situated on a rock 2 miles SE of Stromtangen Light. A number of detached shoals, with a least depth of 7m, lie across the entrance to Leira Bay between this lighted beacon and Stromtangen Light.

Tenneskjaer Light (59°08'N., 10°54'E.) is shown from a structure standing on a rock about 0.5 mile SE of Stangeskjaer Lighted Beacon.

Papperhavn Light (59°06'N., 10°50'E.) is shown from a hut standing on Lyngholmen, an islet lying 2.5 miles S of Stromtangen Light.

Vesterelva (59°11'N., 10°53'E.), leading between the NW side of Krakeroy and the mainland, is entered from the N part of Lera Bay. This passage leads NE to Borg Harbor.

Gasungene Light (59°10.8'N., 10°52.3'E.) is shown from a structure standing on a rock which lies close off the NW side of the entrance to Vesterelva.

Kraka, an islet, lies near mid-channel, about 0.2 mile ESE of the light, and a rocky reef extends from its N side. Sondre Krakebaen, a detached shoal patch, lies 0.2 mile S of the light.

It has a least depth of 2m and is marked by a lighted buoy.

Krosnespynten Light (59°11.9'N., 10°53.8'E.) is shown from a structure standing on the NW side of Vesterelvat, 1.4 miles NE of Gasungene Light.

Huthholmen, an islet, lies close to the E side of the channel, 0.4 mile NNE of Krosnespynten Light, and is marked by a light on its SE side.

Anchorage.—Anchorage can be obtained by large vessels, in depths, of 25 to 27m near the middle of Lera, about 1.2 miles ENE of Stromtangen Light. Anchorage is also available, in a depth of 13m, off the entrance to Vesterelvat about 0.3 mile S of Kraka. A submarine pipeline is located close to the anchorage area.

Directions.—The main alternate route leading to Fredrikstad and Sarpsborg (Borg Harbor) from W passes between Struten Light and Strutskrakkene, 1.3 miles NNE. It leads in an ENE direction using the white sector of Stromtangen Light. This route then leads ESE, passing SSW of Stromtangen Light, using the white sector of Tenneskjaer Light.

The route may also be approached from SW by passing either side of Seikrakk and E of the Sostrene group.

When 1.5 miles from Tenneskjaer Light, the route continues in a N direction, using the white sector of Gasungene Light, to the entrance to Vesterelva.

The principal route leading into Vesterelva passes close W of Sondre Krakebaen and then continues in a NE direction. It passes close SE of Gasungene Light and lies close to the NW shore of the passage. This route then passes through the narrows lying close SE of Krosnespynten Light. It continues within a buoyed channel which passes W of Huthholmen and leads N and NE into Fredrikstad.

Caution.—The strong outflow from Vesterelva frequently causes turbulence in the area off Stromtangen Light.

4.32 Tresteinene Light (59°02'N., 10°54'E.), previously described in paragraph 4.2, is shown from a group of rocks and is equipped with a racon. Tisler, a group of islets and rocks, lies 3 miles SSE of this light.

Vidgrunnen Light (59°01.6'N., 10°57.5'E.) is shown from a structure standing on a rock lying in the approach to Loperen, about 1.9 miles E of Tresteinene Light. Fugleskjaer Light, located 0.6 mile NNE of Vidgrunnen Light, is shown from a structure standing on a rock lying at the seaward end of a spit which fronts the W entrance point of Loperen.

Kvernskjaer, an islet, lies in the middle of the entrance, about 0.7 mile NE of Vidgrunnen Light. A rocky reef extends about 0.4 mile NNW from the N end of this islet and is marked by two lights.

Homlungen Light (59°01.0'N., 11°01.4'E.) is shown from a tower on a hut, 12m high, standing on an islet 4 miles ESE of Tresteinene Light.

Sekkefluene (Soekkeflunene) Light (58°59.0'N., 11°03.4'E.) is shown from a structure standing on a group of rocks lying off the S side of Herfol, 2.2 miles SSE of Homlungen Light.

Klovningarna Light (58°56'N., 11°00'E.), equipped with a racon, is situated 6.3 miles SSE of Tresteinene Light. Norde Hallso Light (58°58.0'N., 11°04.5'E.) is located 3.4 miles NE of Klovningarna Light. These two lights are located in Swedish waters and are both described in paragraph 5.2.

Koster (58°54'N., 11°01'E.), a summit, rises about 1.8 miles SSE of Klovningarna Light and is surmounted by the conspicu-



Homlungen Light

ous ruins of two former lighthouses.

Directions.—The main approach route leading to the ports located at the inner side of Hvaler initially follows the inner coastal passage. This passage provides access to Loperen, which leads to Borg Harbor, and Sekken, which leads to Halden.

Vessels may approach the inner coastal passage by steering in an E direction from a position located about 2.3 miles NNW of Torbjornskjaer Light. They should pass N of Medfjordbaen and adjust course to pass close S of Tresteinene Light. The white sectors of both Tresteinene Light and Homlungen Light may be used.

From the vicinity of Tresteinene Light, the inner passage leads 6 miles SE to the S entrance of Sekken. It passes NE of the Tisler group. The white sector of Norde Hallso Light and the white sector, astern, of Tresteinene Light may be used.

Loperen (59°03'N., 10°58'E.), the channel lying between Asmaloya and Kjerkoy, leads N for about 6 miles from the inner coastal passage. The principal entrance route leads E of Vidgrunnen Light, E of Fugleskjaer Light, and W of Kvernskjaer.

Osterelva (59°09'N., 10°58'E.), a channel lying between the E side of Krakeroy and the mainland, leads 4 miles N from the N entrance of Loperen into Fredrikstad.

Rosvikrenna (59°10.5'N., 10°57.2'E.), a very narrow fairway, lies about 2 miles S of Fredrikstad. It extends for about 1 mile within Osterelva and is marked by a lighted range.

Caution.—The movement of water and the changing positions of the shallows within Rosvikrenna may effect the navigation of long vessels. Such vessels must use tugs when transiting this fairway.

Dredges and diving floats may often be encountered within Rosvikrenna.

Fredrikstad (59°12'N., 10°57'E.)

World Port Index No. 23840

4.33 Fredrikstad stands on both banks of the Glama River where it divides into two branches. Isegran, a small island, lies at the junction. Osterelva, leading S, is the E outlet and Vesterelva is the W outlet. The port forms part of Borg Harbor and serves an industrial area.



Fredrikstad from S



Fredrikstad

Depths—Limitations.—The principal approach to the port is from S via Loperen and Osterelva. This route has a least depth of 11m, which lies in the vicinity of Rosvikrenna, and can be used by vessels with drafts up to 10.4m.

The route from W via Vesterelva has a least depth of 5.8m and can be used by vessels with drafts up to 5.2m.

The Krakeroy Bridge, a bascule bridge, spans Vesterelva, about 0.3 mile NNW of Isegran, and has a vertical clearance of 9m, when closed. When open, it provides a navigable passage, 46.5m wide.

A high bridge spans the river about 0.6 mile NE of Isegran and 7has a vertical clearance of 39.5m (40m under the center).

The port has about 2,000m of total quayage and provides 48 berths. The main facilities are situated at the E side of Osterelva. These include Denofa-Lilleborg Quay, which is 380m long and has depths of 5.5 to 9.8m alongside; Orakaen South, which is 88m long and has depths of 9.8 to 10.6m alongside; and Orakaen North, which is 780m long and has depths of 8.4 to 10m alongside.

A ro-ro ramp, 29m wide, is located at the S end of Orakaaien South and has depths of 9.5 to 11.2m alongside.

Holen Basin, located at the E side of Vesterelva, has a quay, 375m long, with depths of 4.2 to 7m alongside.

The port has facilities for general cargo, container, ro-ro, bulk, and tankers. Vessels up to 213m in length and 10.4m draft can be accommodated.

A drydock, 287m long and 39.2m wide, is situated at the shipyard located off the E side of Vesterelva and used for shipbuilding. It can handle vessels up to 130,000 dwt.

There are also extensive facilities for small craft, including three marinas.

Aspect.—Isegran, a small island, lies at the junction of Osterelva, Vesterelva, and the Glama River. It is connected to the shore by a bridge at the W side.

Pilotage.—For details of pilotage, see paragraph 4.28.

Regulations.—It is reported that a speed limit of 5 knots is in force within the port.

Vessels passing the ferry route, located about 0.2 mile above Isegran, must exercise caution and proceed at the slowest possible speed. Vessels planning to pass the ferry berth must sound one long blast on the whistle to announce their intention. This signal must be repeated just prior to the vessel reaching the berth.

Vessels entering Osterelva from Vesterelva must keep to the starboard side of the fairway.

Vessels approaching the Krakeroy Bridge with the current have navigational priority.

The port and approaches are situated within Sector 1 of the Oslofjorden VTS system. For further details, see Regulations under Oslofjorden in paragraph 4.28.

Contact Information.—See Borg Harbor information.

Caution.—Ferries cross the Glama River about 0.2 mile and 2 miles above Isegran.

During persistent W winds in the Skagerrak, the water rises in the Glama River and may occasionally flood the quays.

The river is subject to siltation and depths may differ from those charted.

4.34 Sarpsborg (59°16'N., 11°06'E.) (World Port Index No. 23835) stands on the Glama River about 6 miles above Fredrikstad. The berthing facilities for ocean-going vessels are situated along the N side of the river, at Sandesund, close E of a sharp bend. The harbor serves both industrial and agricultural areas.

Tides—Currents.—The tidal range is only 0.3m at springs.

Generally, the current in the river does not affect navigation. However, during flood conditions, the flow can be bothersome in the approach to the harbor and tugs must be employed.

Depths—Limitations.—A bridge, with a vertical clearance of 30m, spans the river at Hustangen, close W of the harbor.

An oil quay is situated at Greaker, 2 miles WSW of the main harbor. It is 21m long and has mooring dolphins. The berth has depths of 11.1 to 12.1m alongside and can handle tankers up to 20,000 dwt and 10.4m draft.

A quay, 467m long, is situated at Alvim in the W part of the harbor. It has depths of 7.1 to 8.9m alongside and is equipped with a ro-ro ramp at the W end. Vessels with drafts up to 7.3m can reach this quay.

The main commercial quay at Sandesund is situated at Mel-

los, in the E part of the harbor. It is 280m long and has depths of 5.6 to 6.3m alongside. Vessels with drafts up to 6.1m can reach this quay.

Pilotage.—For details of pilotage, see paragraph 4.28.

Regulations.—The port and approaches are situated within Sector 1 of the Oslofjorden VTS system. For further details, see Regulations under Oslofjorden in paragraph 4.28.

4.35 Sekken (58°59'N., 11°04'E.), a channel, is entered close SE of Sekkefluene (Soekkefluene) Light (58°59.0'N., 11°03.4'E.) and leads NNE for about 7 miles to Singlefjorden. It is bordered by Herfol, Sondre Sandoy, and Nordre Sandoy, on the W side, and the mainland coast of Sweden, on the E side. The fairway within this channel, which is deep and almost free of dangers, forms the preferred route through Hvaler to Halden.

The border between Norway and Sweden is situated approximately along the center of this channel. Several beacons, which are not intended for navigation, stand on the mainland shore of the channel and indicate this border.

Nord Hallso Light (58°58'N., 11°05'E.) is shown from an island lying at the E side of the junction of Kosterfjorden and Sekken, 1.2 miles SSE of Sekkefluene Light. For a description of the waters and coast lying S of this light, see paragraph 5.2.

Glan Light (59°00'N., 11°04'E.) is shown from a structure standing on the S end of an islet, 0.7 mile NNE of Sekkefluene Light.

A conspicuous beacon, 30m high, stands about 0.2 mile NNW of the S extremity of Herfol. Another beacon is situated on the largest islet of Gylteholmane, a group of islets lying near the SE side of Herfol.

Reiertangen Light (59°01'N., 11°07'E.) is shown from a structure standing on the E side of Sondre Sandoy, 2.6 miles NE of Sekkefluene Light.

Halle Vagnaren rises on the mainland 1.4 miles NE of Reiertangen Light. This hill is 120m high and conspicuous.

Kattholmen (59°04.7'N., 11°09.2'E.), an islet, lies in the N part of the channel, 3 miles NNE of Reiertangen Light, and is marked by a light at its SE side. A detached bank, with two above-water rocks, lies close NNW of this islet.

Ostre Rodskjaer, a small and low islet, lies near the middle of the channel, about 1 mile SW of Kattholmen. A shallow reef fringes its NW side and is marked by a perch.

Singlefjorden (59°05'N., 11°10'E.) extends N for about 6 miles from the N end of Sekken and is of no commercial significance.

Haslauflu Lighted Beacon (59°06'N., 11°10'E.) is shown from a rock lying near the middle of the entrance to Singlefjorden, 2.8 miles N of Kattholmen.

Directions.—Vessels entering Sekken should steer a mid-channel course and pass SE of Glan Light and ESE of Reiertangen Light. In the N part of the passage, vessels should keep near to the mainland, which is steep-to, and pass ESE of Ostre Rodskjaer and ESE of Kattholmen.

Vessels can also approach Sekken from S via Koster Fjorden. This route is described in paragraph 5.4.

Two channels lead through Hvaler from the W side of the entrance to Singlefjorden and connect with Osterelva and Fredrikstad. They may only be used by small vessels with local knowledge.

4.36 Svinesund (59°05'N., 11°14'E.), a narrow channel, is entered about 2 miles NE of Kattholmen. It extends in an ENE direction for about 2.5 miles to the W end of Ringdalsfjorden. The shores on both sides of the channel slope steeply and are wooded.

Sponvikskansen Light (59°05.3'N., 11°13.6'E.) is shown from a structure standing on the N side of the entrance to Svinesund.

A fixed bridge, with a vertical clearance of 58m over a width of 50m, spans the channel about 1.5 miles ENE of Sponvikskansen Light. A lighted fairway leads under this bridge.

It is reported that a bridge, with a vertical clearance of 55m, has been constructed about 1 mile E of Sponvikskansen Light.

Ringdalsfjorden (59°06'N., 11°18'E.), a clear channel, leads about 1.5 miles ENE and connects the E end of Svinesund to the N end of Idefjorden.

The border between Norway and Sweden lies approximately in the center of the channel leading through Svinesund and Ringdalsfjorden. Beacons indicating the boundary stand in various places along the shores but have no navigational significance.

Knivsoya is the largest islet of a group lying near the E end of Ringdalsfjorden. It is situated 1.9 miles ENE of the fixed bridge and is marked by a light on the SE side.

Svarte Jan Light (59°06.7'N., 11°19.5'E.) is shown from a floodlit structure standing on the Swedish mainland close S of Knivsoya. The main fairway narrows in this vicinity and leads between this light and the S extremity of Knivsoya.

Ice.—The channel leading through Svinesund and Ringdalsfjorden is usually kept open throughout the year with the help of icebreakers.

Tides—Currents.—In fine weather, the incoming and outgoing tidal currents are fairly regular and attain a rate of 3 to 4 knots; however, this also depends on the weather conditions.

Depths—Limitations.—The least depth in the fairway leading through Svinesund and Ringdalsfjorden is 8.5m. Vessels with drafts up to 7.6m can transit these channels.

Halden (59°07'N., 11°23'E.)

World Port Index No. 23850

4.37 Halden is situated at the E end of Ringdalsfjorden in the area formed with the junction of Idefjorden. The town stands on the land sloping gently down to the mouth of the Tistedalselva River. The port, which is divided into inner and outer harbors, serves an industrial area.

Brattoya, an island, lies in the approach to the port. Sauoya, another island, lies in the E part of the port and is connected at its N end to the mainland by a short causeway.

Ice.—Ice forms in the harbor every winter but usually the

channels and berths are kept open by icebreakers.

Tides—Currents.—Generally, the tidal range is about 0.3m.

Depths—Limitations.—The least depth in the approaches to the port is controlled by the fairway passing through Svinesund and Ringdalsfjorden. The port has about 1,000m of total quaysage.

The inner harbor lies between the E side of Sauoya and the mainland. It provides seven berths. The channel leading to this harbor has a depth of 5.3m but is subject to siltation.

The outer harbor lies between Brattoya and Sauoya. It can be approached by passing either N or S of Brattoya. The N passage is used generally by smaller vessels. The outer harbor provides six berths

There are facilities for general cargo, container, tanker, and bulk vessels. Vessels up to 7m draft can be accommodated. For more berthing information see the table titled **Halden—Berth Information**.

Pilotage.—Pilotage is compulsory for foreign vessels. Harbor pilots can be contacted by VHF. Pilotage services should be ordered through Safe Sea Net or through the Horten Pilot Booking Center (see paragraph 4.1 and paragraph 4.28). Using the Horten Booking Center may incur additional charges.

Halden—Pilot Boarding Locations	
Vidgrunnen	59°01.0'N, 10°55.9'E
Sekkefluene	58°58.8'N, 11°03.9'E



By Oyvind Holmstad [CC BY-SA 3.0 (<https://creativecommons.org/licenses/by-sa/3.0/>)], via Wikimedia Commons

Halden

Contact Information.—See the table titled **Halden—Contact Information**.

Halden—Berth Information			
Berth	Length	Depth	Remarks
Norske Skog Terminal			
Northwest	270m	—	Containers, breakbulk, and timber.
Northeast	84m	—	Timber and breakbulk.

Halden—Berth Information			
Berth	Length	Depth	Remarks
Halden Kornsilø And Molle Terminal			
Halden Kornsilø and Molle	24m	—	Grain and corn.
Halden Outer Harbor Terminal			
Ytre Molbrygge	264m	5.2-9.0m	Containers, timber, general cargo, and dry bulk.
Indre Molbrygge	202m	5.2-9.0m	Containers, timber, general cargo, and dry bulk.

Halden—Contact Information	
Port	
VHF	VHF channels 12, 13, 14, and 16
Telephone	47-48-990-222 (mobile)
	47-69-174-830
Facsimile	47-69-180-680
E-mail	postmottak@halden.kommune.no
Web site	https://www.halden.kommune.no/teknisk/haldenhavn/Sider/Mal_side.aspx
Hours	Monday to Friday (0730 to 1500)

Anchorage.—Vessels waiting for slack water in Svinesund anchor in Singlefjorden. Within the harbor of Halden the best

anchorage is E of Brattoy, in depths of 13 to 16m, mud and sand.


4.38 Idefjorden (59°03'N., 11°25'E.) extends about 9 miles SSE from the E end of Ringdalsfjorden. This fjord is nearly free of dangers but it becomes shallow about 1 mile from the head. The shores are heavily wooded and most of the small bays indenting them are overgrown by weeds.

The border between Norway and Sweden lies approximately in the center of the channel leading through the fjord.

Skyskaffen Light (59°06.0'N., 11°22.5'E.) is shown from a structure standing on the E shore of the fjord, about 1.2 miles S of Halden Harbor.

A number of former granite-loading places are situated along the shores of this fjord, but the facilities are in poor condition.

It is reported that no places of commercial significance are located in the fjord and all cargo is handled at Halden.

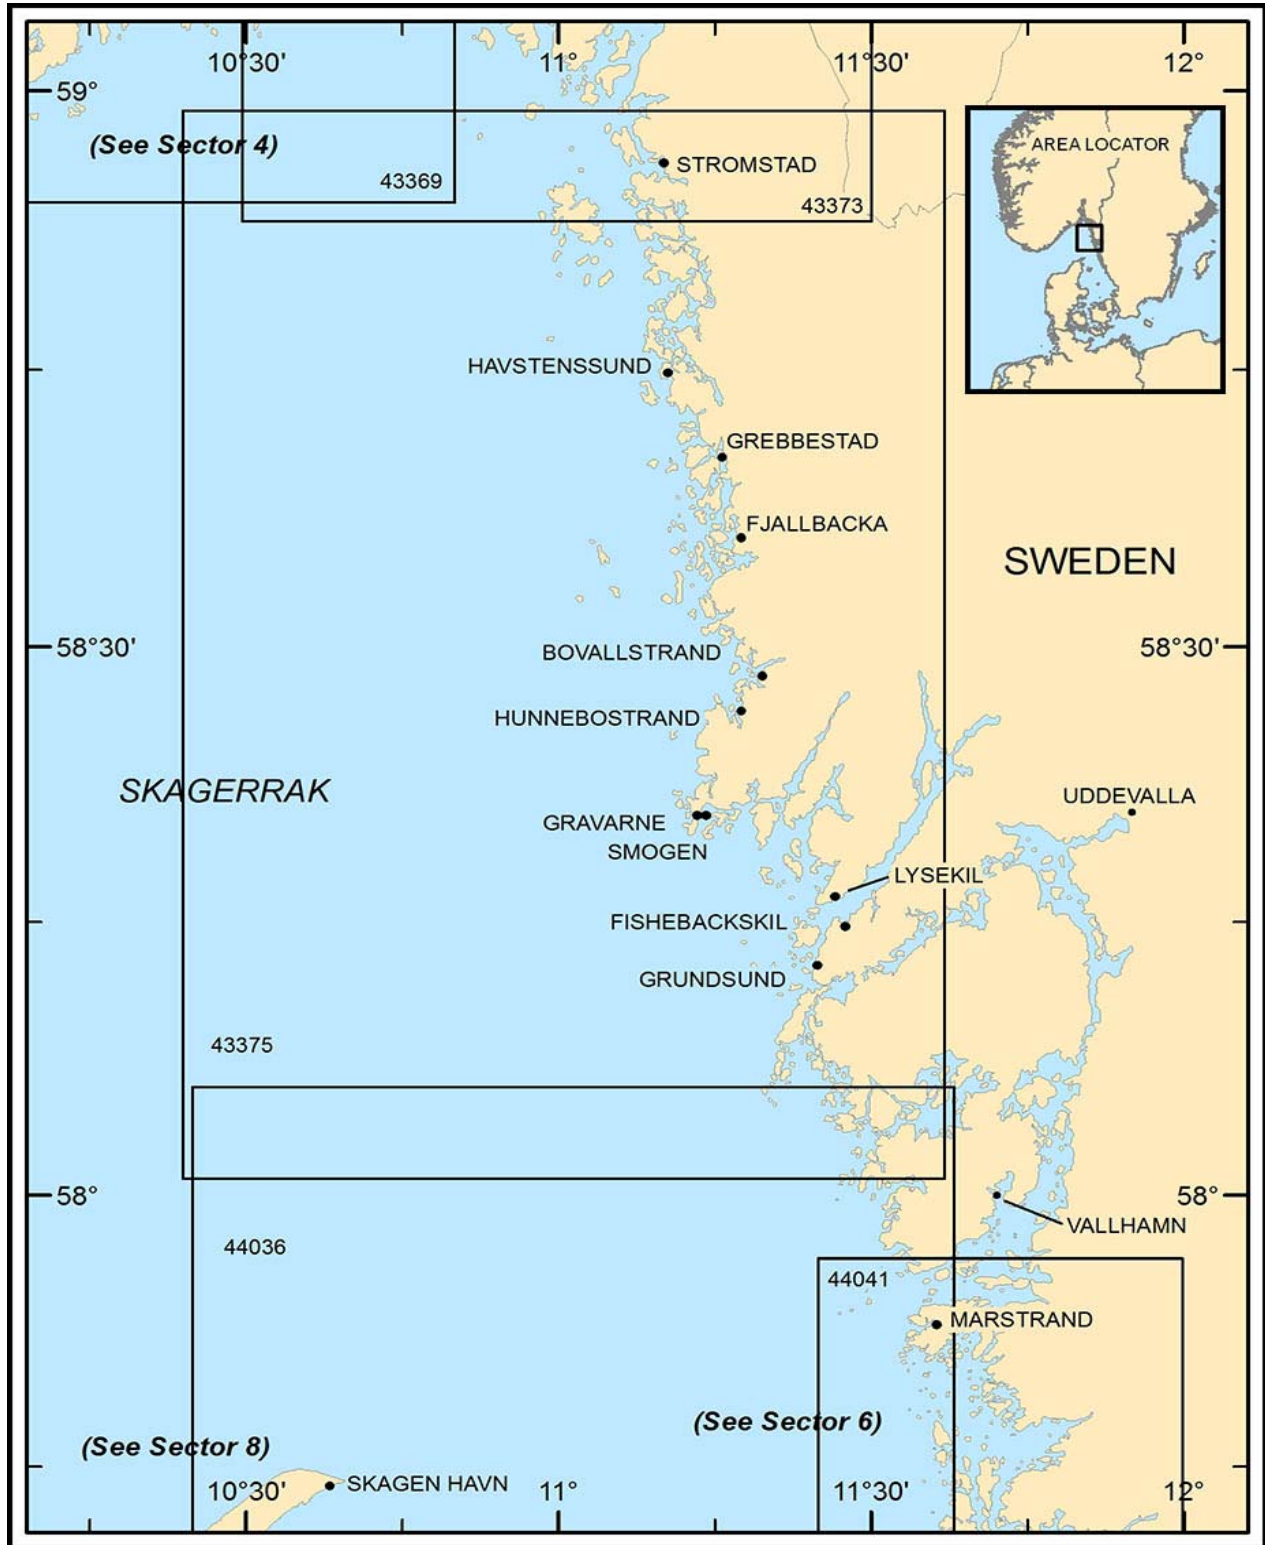

Additional chart coverage may be found in NGA/DLIS Catalog of Maps, Charts, and Related Products (Unlimited Distribution).

SECTOR 5 — CHART INFORMATION

SECTOR 5

SWEDEN—WEST COAST—SEKKEN TO MARSTRANDSFJORDEN

Plan.—This sector describes the NW coast of Sweden between Sekken, a waterway, and the entrance to Marstrandsfjorden, about 65 miles SSE, including the approaches to Uddevalla. The descriptive sequence is from N to S.

General Remarks

5.1 The stretch of the W coast of Sweden covered by this sector is fronted by “Skargard,” a belt of islands, islets, and rocks which extends from 4 to 8 miles seaward.

Although the coast is very irregular, the fjords do not extend far inland and the scenery, compared to that of Norway, is less interesting. The rocky elevations on the mainland are separated by long narrow valleys. These valleys, which are composed of clay floors, produce a great deal of cultivation.

Navigation within the dangers of the Skargard is intricate and vessels require local knowledge.

Ice.—Ice normally forms in the inner leads, fjords, and several harbors located within the area described in this sector.

Pilotage.—Generally, pilotage is compulsory along certain fairways connecting ports along the coast in Swedish waters. Vessels subject to compulsory pilotage vary in size and type according to location; these vessels are divided into the following categories:

1. Category 1—Vessels carrying or with uncleaned tanks which last carried:
 - a. Liquefied gas.
 - b. Liquid chemicals defined in MARPOL73 Supplement 2, Annex 2 as category A, B, or (if vessel does not have a double-skin hull under all cargo tanks) C.
 - c. Liquid chemicals which, according to the IMO bulk chemical code, should be carried in Type 1 or 2 vessels.
2. Category 2—All other chemical tankers which are laden or have uncleaned tanks and all laden oil tankers.
3. Category 3—All other vessels.

For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

It is reported that extensive changes to pilotage procedures and VTS systems have been carried out in regard to the ports described within this sector. Generally, initial ordering of pilots for ports described within this sector should be carried out via the Swedish Vessel Reporting System (FRS) on the Swedish Maritime Administration internet web site.

In exceptional cases, pilots may be ordered by e-mail, telephone, facsimile, or VHF. A preliminary request for pilotage should be made at least 24 hours in advance. A definitive request for pilotage must be made via the Pilot Request System at least 5 hours in advance. For additional information, see the following web site:

Swedish Maritime Administration Home Page

<https://www.sjofartsverket.se/en>

Regulations.—Under regulatory directives of the EU, the Swedish Maritime Administration (SMA) has established a Vessel Reporting System (FRS) for all vessels 300 gt and over that are bound for Swedish ports or anchorages within Swedish waters. Information regarding arrival, departure, the carrying of dangerous or polluting goods, and the delivery of ship-generated waste must be forwarded in advance by the vessel or agent. For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

Commercial vessels in Swedish territorial waters, when in the company of Swedish warships in daylight or when within 1 mile of any restricted or semi-restricted areas, are required to hoist their national flag. When at anchor in the company of Swedish warships, the national flag shall be hauled down.

Special regulations are in force with regard to the presence of aliens and foreign vessels within certain restricted and semi-restricted areas fronting the coast. Generally, foreign ships may, without permission, make use of the main channels, shipping lanes, and fairways within the restricted and semi-restricted areas. Foreign ships may also, without permission, remain within these areas for a maximum of 72 hours successively at an anchorage or mooring. For further details, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

Several Restricted Military Areas have been established along the coast for the protection of defense installations. Under normal circumstances, foreign vessels may stay in these areas without special permission. However, during times of increased military tension, special regulations, promulgated by the Swedish authorities, will apply.

Such an area lies within the South Channel leading to Uddevalla in the vicinity of Algon (57°55'N., 11°40'E.).

Certain islets and rocks, listed below, have been designated Seal Protection Areas. During the period from 15 May to 15 July anchoring within 100m or landing on these islets is prohibited.

Within the arc covered by this sector, the following islets are designated as seal protection areas:

1. Sockna (58°50.8'N., 11°00.4'E.).
2. SV Ramsokalv (58°49.3'N., 11°01.8'E.).
3. Segelskaren (58°46.7'N., 10°59.2'E.).
4. Norra Vaderoarna (58°35.0'N., 11°02.0'E.).
5. Bredviksskaren (58°17.6'N., 11°22.5'E.).
6. Gaso-skargarden (58°15.0'N., 11°21.5'E.).
7. Lynholmarna (57°52.8'N., 11°40.5'E.).
8. SV am Tornholmen (57°50.2'N., 11°39.0'E.).

Directions.—From a position located about 3 miles SSE of Faerder Light (59°02'N., 10°32'E.), the coastal route leads SSE for about 45 miles to a position located about 6 miles WSW of Hallo Light (58°20'N., 11°13'E.). It lies in deep water outside the 50m curve and passes about 8 miles SW of Ramskar Light (59°45'N., 11°00'E.).

From WSW of Hallo Light, the route leads SSE for 29 miles to a position located about 4 miles SW of Hatteberget Light

(57°52'N., 11°28'E.). It lies in deep water outside the 50m curve and passes about 4 miles WSW of Maseskar Light (58°06'N., 11°20'E.).

An inner coastal passage, used by small vessels with local knowledge, leads inside “Skargard.” It leads generally in a S direction for 35 miles from the junction of Sekken and Kosterfjorden to Hallo Light. It then continues through the islands and dangers fronting the mainland, passing N and E of Malm-on Island (58°20'N., 11°20'E.), to the vicinity of the entrance to Gullmarnsfjord.

Archipelago routes lead through the dangers fronting the mainland coast and are well sheltered. The channels, which are used by local coasters, small craft, and fishing vessels, are intricate and very narrow in places. Local knowledge is required.

Caution.—Due to the residual danger of the possible existence of bottom mines laid during WWII, vessels are cautioned against anchoring or fishing within several former NEMEDRI mine danger areas, which are located along the coast. For further information, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

Marine farms exist N and NW of Algon; because the off-lying dangers are steep-to, soundings give very little warning of danger when approaching this stretch of coast in thick weather.

Sekken to Hallo Light

5.2 Nord Hallso Light (58°58.0'N., 11°05.3'E.) is shown from a structure standing on an island of the same name. This island lies at the E side of the junction of Kosterfjorden and Sekken, 1.2 miles SSE of Sekkefluene Light (58°59.0'N., 11°03.4'E.).

The island can be easily identified by its reddish-yellow color, its two hummocks, and a large white square mark, with a black border, painted on a steep slope in its N part.

Tjuholmskappen Light is shown from a structure standing on an islet 0.7 mile NE of Nord Hallso Light.

Kosteroarna (58°55'N., 11°00'E.) is an extensive group of islands, islets, and rocks which fronts the mainland and may best be seen on the chart. It lies centered about 6 miles SSW of Nord Hallso Light.

Nord Koster and Syd Koster (Sor Koster) are the largest islands in this group. In hazy weather, they are often visible at a greater distance than the mainland. These islands are practically devoid of trees and, being of a dark color, appear in sharp contrast against the lighter coast behind them.

A number of small harbors and marinas are situated within Kosteroarna. They are mostly used by fishing vessels, small craft, and local ferries. The main harbors include the following:

1. Ramsøhavn (58°50'N., 11°04'E.).
2. Brevik (58°52'N., 11°02'E.).
3. Korshamn (Ekenas).
4. Nordkoster (58°54'N., 11°01'E.).

Klovningarna Light (58°56'N., 11°00'E.), equipped with a racon, is shown from a tower, 6m high, standing on the easternmost of two islets at the N end of Kosteroarna.

Koster (58°54'N., 11°01'E.), the summit of Nord Koster, rises about 1.8 miles SSE of Klovningarna Light and is 59m high. It is surmounted by the ruins of two conspicuous former light-houses.

Valtjallet, a prominent hill surmounted by a beacon, rises on



By Geological Survey of Sweden [CC BY 2.0 (<https://creativecommons.org/licenses/by/2.0/>)], via Wikimedia Commons

Ursholmen Light

Syd Koster, 1.2 miles SSE of Koster. A conspicuous chapel is situated close NE of this hill.

5.3 Grisbadarna (58°54'N., 10°57'E.), a group of rocky shoals, extends about 6 miles W and 4 miles SW from Klovningarna Light. This group, which may best be seen on the chart, has depths of 2 to 10m and is marked by buoys. The sea breaks on these shoals during heavy weather.

Grisbadarna SV Lighted Buoy (58°53.8'N., 10°49.3'E.), moored about 5.6 miles WSW of Klovningarna Light, marks the outer dangers at the W end of this group.

Ursholmen (58°50'N., 11°00'E.), the largest islet in the SW part of Kosteroarna, lies 6 miles S of Klovningarna Light and is dark colored. A light is shown from a prominent tower, 13m high, standing on the W side of this islet. A conspicuous disused light tower is situated close NW of the light.

Bredgrunden, a rock awash, lies 1.2 miles WNW of Ursholmen Light and is marked by a buoy. Erikslacken, a detached shoal, lies about 1.3 miles WSW of Ursholmen Light and has a least depth of 7m. These two dangers are the outermost in this vicinity.

Ramsø (58°50'N., 11°04'E.), the largest island in the SE part of Kosteroarna, is located 2.5 miles E of Ursholmen Light.

Directions.—A route, which may best be seen on the chart, leads NE through the dangers lying in the N part of Kosteroarna and into the N end of Kosterfjorden. It is entered about 4.5 miles SW of Klovningarna Light and initially indicated by the range formed by Nord Hallso Light and Tjuholmskappen Light. This route then passes close SE of Klovningarna Light.

The fairway may be used by vessels up to 12,000 dwt and 8m draft; however, numerous shallow dangers lie close adjacent to it. This route should not be used during heavy weather or reduced visibility.

Caution.—Fishing vessels may be encountered in the vicinity of the route leading through the N part of Kosteroarna.

5.4 Ramskar Light (58°45'N., 11°00'E.), equipped with a racon, is shown from a prominent tower, 19m high, standing on a large isolated rock lying 4.5 miles S of Ursholmen Light.



By Thomas Eliasson, Geological Survey of Sweden [CC BY 2.0 (<https://creativecommons.org/licenses/by/2.0/>)], via Wikimedia Commons

Ramskar Light

It marks the S end of a group of islets and shallow shoals, which extends S from Kosteroarna and may best be seen on the chart.

A shoal bank, with depths of 7.4 to 14m, extends about 1 mile S from the light and is marked by a buoy.

Spiran, a detached shoal bank, lies centered about 2 miles SSE of Ramskar Light. It has depths of 7.6 to 12m and is marked by a buoy at the N end.

Persgrunden (58°42'N., 10°51'E.), a group of dangerous shoals with depths of 2.4 to 15m, lies centered about 5 miles SW of Ramskar Light. The outermost shoal patch has a least depth of 7.4m and is marked by a lighted buoy.

Koster Fjorden (58°52'N., 11°06'E.) lies between the islands and islets fringing the mainland and the E side of Kosteroarna. It connects the waters of Olsfjorden, at the S end of Sekken, to the Skagerrak. This channel forms part of the inner coastal passage. The fairway, which is authorized for drafts up to 10m, is deep and comparatively clear of dangers.

Sneholm Light (58°53.5'N., 11°03.9'E.) is shown from a prominent tower, 11m high, standing on an islet lying at the W side of the channel, 4.5 miles S of Nord Hallso Light.

Kibblingarna (58°55'N., 11°05'E.), a small group of islets, lies at the E side of the channel, 1.6 miles NE of Sneholm Light. A light is shown from the E end of the southernmost islet.

Vattenholmen Light (58°52.5'N., 11°06.4'E.) is shown from a structure standing on an islet lying at the E side of the channel, 1.7 miles SE of Sneholm Light.

Svängen Light (58°47.9'N., 11°07.1'E.) is shown from a structure standing on the N part of an islet lying at the E side of the channel, 4.5 miles S of Vattenholmen Light. A prominent dwelling is located near the light.

A number of small harbors and marinas are situated within Koster Fjorden. They are used by fishing vessels, small craft, and local ferries. The main harbors include Kungsvikshamn (59°00'N., 11°08'E.) and Reso (58°48'N., 11°10'E.).

Directions.—The channel can be approached from N, W, and S. The N approach uses the route leading to the ports located in the inner side of Hvaler. The W approach uses the route



By Bengt Nyman [CC BY 2.0 (<https://creativecommons.org/licenses/by/2.0/>)], via Wikimedia Commons

Sneholm Light



By Thomas Eliasson, Geological Survey of Sweden [CC BY 2.0 (<https://creativecommons.org/licenses/by/2.0/>)], via Wikimedia Commons

Svängen Light

leading through the N part of Kosteroarna.

The S approach uses either of two routes which pass SE or ESE of Ramskar Light. From a position located about 4 miles SSE of Ramskar Light, the direct route from S leads in an ENE direction for 8 miles, using the white sector of Vattenholmen Light, to the S entrance of Koster Fjorden.

After passing about 1 mile S of the S end of Persgrunden, the route from SW leads in a NE direction for 8 miles to join the direct route from S. It uses the white sector of Svängen Light and passes between the shoal extending S from Ramskar Light and Spiran.

Several channels also lead through the dangers lying between Ursholmen Light and Ramskar Light. These channels are recommended for only small craft and fishing vessels with local knowledge.

Caution.—Several submarine cables, which may best be seen on the chart, extend across Koster Fjorden in the vicinity of Sneholm Light.

5.5 Stromstad (Stroemstad) (58°56'N., 11°10'E.) (World Port Index No. 23870) is situated on the mainland, on the NE side of Koster Fjorden. The sheltered harbor is almost never obstructed by ice. It includes a commercial port that handles mainly coastal traffic, a ferry terminal servicing ports in Norway, and a fishing harbor. The harbor area includes three natural coves, known as Norra Hamnen, Sodra Hamnen and Roseberget, along with separate ro-ro and liquid cargo terminals.

Winds—Weather.—Generally, the prevailing winds are from W to SW. With strong W winds, especially during fall, a disturbed sea may form in the harbor in combination with HW. Morning fog is prevalent from February to April due to S winds.

Ice.—Ice is usually not a problem in the harbor. However, during severe winters, some vessels may be hindered in February.

Tides—Currents.—The tidal range is about 0.3m. The water level is also affected by meteorological conditions. Winds from W raise the water level and those from E cause it to fall.

Depths—Limitations.—Norra Hamnen provides six berths and is used by local ferries and coasters. Generally, vessels up to 7.3m draft are accommodated in the harbor.

Sodra Hamnen, divided from Norra Hamnen by a small peninsula, is used by fishing boats and small craft. Sodra Hamnen is protected from S by a breakwater, which connects an islet to the mainland.

A ro-ro berth is situated 0.2 mile S of the breakwater. A tanker terminal quay is situated at Roseberg, 0.6 mile S of the entrance to Sodra Hamnen. With prior notice and the use of additional fairway markings, tankers with drafts up to 11.5m can transit the entrance channel and be accommodated during daylight.

For more information see the table titled **Stroemstad—Berthing Information**.

Stroemstad—Berthing Information			
Berth	Length	Maximum Vessel Draft	Remarks
Ro-Ro Terminal			
Ro-ro	75m	7.0m	Ferries.
Other Berths			
Torskholmen	80m	7.5m	—

Pilotage.—Pilotage to Stromstad is compulsory for the following vessels (see paragraph 5.1 for definitions of vessel categories):

1. All Category 1 vessels.
2. Category 2 vessels of 80m length or 15m beam and over.
3. Category 3 vessels of 90m length or 16m beam and over.

A preliminary request for pilotage should be made at least 24 hours in advance. A definitive pilotage request must be made via the Pilot Request System at least 5 hours in advance.

Generally, initial ordering of pilots should be carried out via the e-Services section on the Swedish Maritime Administration

internet web site: (see paragraph 5.1).

Pilots board in the following positions:

1. About 1.2 miles WNW of Brofjordens Angoring Lighted Buoy in position 58°15.3'N, 11°11.2'E.
2. About 1.5 miles S of Ramskar Light in position 58°43.9'N, 11°13.0'E.
3. About 0.8 mile WNW of Nord Hallso Light in position 58°58.2'N, 11°13.1'E.

Regulations.—A recommended vessel reporting procedure is established in the W approaches to Stromstad. It applies to vessels more than 300 gt, or greater than 45m in length, and includes tows. Smaller vessels equipped with VHF should also report if circumstances warrant.

Vessels are advised to make a general call in English on VHF channel 16 when passing Reporting Point 21, in position 58°56.3'N, 11°09.3'E, located approximately 1.4 miles W of Flatskar and best seen on the chart. The recommendation is for vessels to provide the following information when calling:

1. Vessel's name.
2. Type of vessel.
3. Name and location of reporting point.
4. Intended route.
5. Destination.

It is also recommended that vessels exceeding 100m should not meet between the fairway S of Holmengra island and the port of Stromstad.

In Sodra Hamnen, the inner harbor and Norra Hamnen, vessels are limited to a speed of 5 knots.

Contact Information.—See the table titled **Stromstad—Contact Information**.

Stromstad—Contact Information	
Pilots	
Call sign	Stromstad Pilot
VHF	VHF channel 10
Telephone	46-771-630650
E-mail	westcoastpilot@sjofartsverket.se
Web site	https://www.sjofartsverket.se
	https://mswreportal.se

Directions.—Three approach channels, for which local knowledge is required, lead through the dangers fronting the mainland from Koster Fjorden to the port.

The channel leading from NNW is entered about 1 mile E of Nord Hallso Light. It is authorized for drafts up to 6m but narrows to a width of only 45m at the S end.

The channel leading from WSW is entered by passing N or S of Kibblingarna. It is authorized for drafts up to 6m.

The main entrance channel leads from W and is authorized for drafts up to 9m. The fairway is entered about 1.5 miles S of Nord Hallso. It is winding but well marked.

Caution.—A submarine pipeline extends SW for about 250m from the NE side of Norra Hamnen.

A wreck lies 29 miles WSW of Stromstad.

5.6 Vacker Light (58°42.7'N., 11°09.7'E.) is shown from

a prominent tower, 13m high, standing on a rock lying close off the mainland, 6 miles WSW of Ramskar Light. Dangers fronting the coast extend up to about 3 miles WNW, 2.3 miles W, and 1.3 miles SW of this light.

Bramskar Light (58°39.2'N., 11°09.5'E.) is shown from a structure standing on an islet lying 3.6 miles S of Vacker Light. Moro, a yellowish-colored small island, lies about 0.5 mile NNW of the light and its summit is surmounted by an edifice of stones.

Otteron Island, situated 2 miles E of Bramskar Light, is high and dark, with some trees growing on its sides. Pinno Island lies close NW of Otteron Island.

Stangeskar Light (58°39.6'N., 11°11.6'E.) is shown from a tower, 7m high, standing on the NE end of an islet lying 1.2 miles ENE of Bramskar Light.

Djupskar Light (58°38.2'N., 11°11.7'E.) is shown from a tower, 6m high, standing on a rock lying 1.6 miles SE of Bramskar Light.

Sodra Syster Light (58°35.6'N., 11°09.2'E.) is shown from a prominent tower, 9m high, standing on a rock lying 3.7 miles S of Bramskar Light.

A number of small harbors and marinas are situated within fjords along the mainland coast between Svangen Light and Bramskar Light. They are used only by fishing vessels, small craft, and local ferries. The main harbor is Havstensund (58°45'N., 11°11'E.), which may be approached through channels leading from SSW and NNW. Local knowledge is required.

5.7 Grebbestad (58°41'N., 11°16'E.) (World Port Index No. 23890), a small harbor and loading place, is located at the head of an inlet about 3.6 miles NE of Bramskar Light. The main approach channel from seaward, which is authorized for drafts up to 4.5m, leads in an ENE direction. It passes close S of Bramskar Light and between Otteron Island and Pinno Island. Local knowledge is required. The harbor provides three commercial berths. The main berth is 80m long and has a depth of 5m alongside. The harbor is used mostly by coasters, fishing boats, and pleasure craft.

Caution.—A prohibited anchorage area, best seen on the chart, lies 4 miles WSW of Vacker Light.

Fjallbacka (58°36'N., 11°17'E.) (World Port Index No. 23900), a small harbor and loading place, is situated in a bay on the mainland, about 4 miles E of Sodra Syster Light. The main approach channel, which is narrow and winding, leads in an E direction and is authorized for drafts up to 7.3m. It is entered close N of Sodra Syster Light. Local knowledge is required.

The harbor is used mostly by coasters, fishing boats, and small craft. It provides two commercial quays. The main berth is 95m long and has depths of 4.8 to 5m alongside.

Small vessels can anchor off the harbor, in depths of 8 to 10m, good holding ground.

Valo Sadlar, 68m high, rises 1 mile W of Fjallbacka and is the summit of Valon Island. It has two small peaks separated by a cleft and is conspicuous from seaward.

5.8 Vaderoarna (58°34'N., 11°04'E.) is a large group of islands, islets, and rocks which fronts the mainland and may best be seen on the chart. It lies centered 3.5 miles SW of Sodra

Syster Light.

Vaderobod Light (58°32.4'N., 11°01.8'E.), equipped with a racon, is shown from a prominent tower, 19m high, standing on the S side of a small, high island in the SW part of Vaderoarna, 5 miles SW of Sodra Syster Light.

Skalholmen Light (58°32.5'N., 11°05.7'E.) is shown from a tower, 9m high, standing on the E extremity of an islet lying in the SE part of Vaderoarna, 2 miles E of Vaderobod Light. Lygno, a small island, lies close NW of the light and is marked by a beacon.

Regulations.—There is a speed limit of 5 knots within the harbor and 7 knots in the approaches.

The islands within Vaderoarna are predominately a reddish-brown color and not easily distinguishable from those fringing the mainland coast. Storo, the highest and largest island, lies in the NE part of the group, 2.4 miles NNW of Skalholmen Light. A disused lookout tower stands on its S part. A prominent beacon is situated on an islet lying close SE of the S extremity of Storo.

Kilen, a shoal patch, lies on the NW side of Vaderoarna about 4.3 miles NNW of Vaderobod Light. It has a least depth of 4.5m and is marked by a buoy.

Knappesten, a shoal with a depth of 8m, lies at the N end of the group about 4 miles NNE of Vaderobod Light.

Skalgrund, a rocky patch, lies at the S end of the group about 1.5 miles SE of Vaderobod Light. It has a least depth of 2m and is marked by a light.

Bockern, a detached shoal with a depth of 9m, lies at the SW end of the group about 1.8 miles S of Vaderobod Light.

During W gales, the sea breaks heavily on the outer dangers in this group.

5.9 Vadero Fjorden (58°33'N., 11°07'E.) is the channel lying between the E side of Vaderoarna and the dangers fringing the mainland coast. The fairway is authorized for drafts up to 10m.

Stora Ryggen, a detached shoal patch, lies in the N part of the channel. It has a least depth of 4.4m and is marked by a buoy. This shoal lies about 1.3 miles W of Sodra Syster Light and forms the westernmost danger in this vicinity. Vessels transiting the channel are advised to pass about 0.3 mile W of this shoal.

Stora Haskar, a high and yellowish-red islet, lies on the SE side of Vadero Fjorden. It is situated about 2.3 miles E of Skalholmen Light and is conspicuous when approaching the channel from SW.

Sote Fjorden (58°29'N., 11°10'E.), the water area lying S of Vadero Fjorden, extends S as far as Mjolskar Light.

Saltskar, an islet, lies in the NE part of Sote Fjorden, about 4.4 miles ESE of Skalholmen Light, and is marked by a conspicuous beacon, which appears as a figure of an old woman. Kalen, a reef awash at LW, lies about 1.8 miles WSW of Saltskar and is marked by a buoy.

Mjolskar Light (58°24.9'N., 11°11.6'E.) is shown from a prominent tower, 14m high, standing on the NE end of an islet lying at the SE end of Sote Fjorden, 9.3 miles SE of Vaderobod Light.

Soreskar, a light-colored high islet, lies 0.7 mile NNW of Mjolskar Light and is prominent from seaward. Sote Bonde, a light brown hill, rises on the mainland 1.2 miles ENE of Mjolskar Light. It is 58m high and prominent from SW.

Lerberget, a detached shoal with a least depth of 5.3m, and Mickelbaden, a detached shoal with a least depth of 8m, lie about 1.2 miles WSW and 1.4 miles NW, respectively, of Mjolskar Light. These two shoals form the outermost dangers in this vicinity.

During W gales, the sea breaks heavily on the outer dangers lying along the E side of Sote Fjorden.

5.10 Hallo Light (58°20'N., 11°13'E.) is shown from round stone tower, with a red top. It is a prominent floodlit tower, 20m high, standing on a small island lying about 4.7 miles S of Mjolskar Light. Salo, an islet, lies 0.4 mile WNW of Hallo Light and a prominent beacon and a cairn stand near its center.



By Peter Krantz [CC BY 4.0 (<https://creativecommons.org/licenses/by/4.0/>)], via Wikimedia Commons

Hallo Light

Smogen Island lies 1.3 miles N of Hallo Light and a prominent lookout tower, 7m high with a pointed roof, stands in its S part. A conspicuous water tower is situated 0.2 mile NNE of this tower.

Sejebaden, a detached shoal patch, lies about 2.1 miles WNW of Hallo Light. It has a least depth of 5.9m and is marked by a lighted buoy. Det Grunda, a detached shoal with a least depth of 7m, and Svaberget, a detached shoal bank with a least depth of 11m, lie about 3.1 miles and 4.7 miles, respectively, WNW of Hallo Light. These three shoals form the outermost dangers in this vicinity.

A number of small harbors and marinas are situated on the mainland at the E side of Vadero Fjorden and Sote Fjorden. They are used only by fishing vessels, small craft, and local ferries. The main harbors include the following;

1. Hamburgsund (58°33'N., 11°16'E.).
2. Smogen (58°21'N., 11°14'E.).
3. Hasselosund (58°22'N., 11°14'E.).
4. Fisktangen (58°22'N., 11°16'E.).

Caution.—Winds from S usually cause a strong N current in the vicinity of Hallo Light and caution is advised.

A circular area, within which all bottom activities are prohibited, lies centered about 17.5 miles SW of Hallo Light. This area has a radius of 0.5 mile and may best be seen on the chart.

5.11 Bovallstrand (58°29'N., 11°20'E.), a small harbor and loading place for stone, is situated on the S side of an inlet,

5.4 miles NE of Mjolskar Light. The harbor provides three commercial berths. The main berth is 48m long and has a depth of 4m alongside. The main approach route leads from NNW and is authorized for drafts up to 8m. Local knowledge is required. The harbor is used by coasters and small craft.

Sparo Klofva (Sparodklavan), a hill, rises 0.9 mile ENE of Bovallstrand and is 111m high. It has a cleft between two peaks and is conspicuous from seaward.

Hunnebostrand (58°26'N., 11°18'E.) (World Port Index No. 23910), a small harbor and loading place, is situated on the E part of Osofjorden, 3.5 miles NE of Mjolskar Light. It may be approached from seaward from the SW or the WNW. The channel leading through the off-lying dangers from WNW is entered about 3 miles N of Mjolskar Light and is indicated by a lighted range. The entrance fairway is authorized for drafts up to 4m. Local knowledge is required.

The harbor provides six berths. The main berths include Sodra Kajen, which is 75m long and has depths of 4.5 to 5m alongside, and Angbatsbrygga, which is 120m long and has depths of 4 to 4.5m alongside. The harbor is used by small commercial vessels, fishing boats, and pleasure craft.

Sotekanalen leads from the vicinity of Hunnebostrand to Kungshamn (58°22'N., 11°15'E.), 5 miles SSW. This canal, which is 3 miles long, is spanned by a swing bridge with a vertical clearance of 5.7m when closed and a horizontal clearance of 5.7m. It is authorized for drafts up to 4m.

Kungshamn (58°22'N., 11°15'E.), a large fishing harbor, is situated at the W side of a peninsula, about 1.8 miles NNE of Hallo Light. The main approach channel, which is authorized for drafts up to 8m, leads NNE through the dangers fringing the coast. It is entered about 1.2 miles S of Hallo Light and is indicated by a lighted range. Local knowledge is required.

Depths—Limitations.—The harbor provides berths and has extensive facilities for fishing vessels. The S quay is 133m in length with a maximum draft of 4m. The S quay is used by fishing vessels.

A conspicuous radio mast, 75m high, stands in the vicinity of the harbor.

Caution.—The approaches to Kungshamn lie within the Lysekil VTS area (see paragraph 5.15).

Hallo Light to the Approaches to Uddevalla

5.12 Malmo Fjord (58°18'N., 11°14'E.), the water area lying S of Hallo Light, forms the outer approaches to Ornefjorden, Abyfjorden, and Brofjorden.

Malmon, an island, lies close S of the mainland coast 3.5 miles E of Hallo Light. The water area between is encumbered by numerous islets, rocks, and shoals which may best be seen on the chart.

Sodra Astebrott, a shoal with a least depth of 1.6m, lies at the S end of a chain of shoals, 1.4 miles SSE of Hallo Light. This shoal is marked by a buoy and a detached patch, with a depth of 9.8m, lies about 0.5 mile SE of it. These shoals form the outermost dangers in this vicinity.

Sorgrundsberg (58°17'N., 11°11'E.), a detached shoal bank, lies about 3.1 miles SSW of Hallo Light. This off-lying danger has a least depth of 10.5m and is marked by a lighted buoy moored about 0.4 mile SSW of it.

Bondebrotten, a group of islets and rocks, lies centered about



By W. Carter [CC 0] via Wikimedia Commons

Brandskarsflak (green) and Dynabrott (red) lights as seen from Malmon Island

1.5 miles SW of the S end of Malmon. Malmobrotten, a group of shoals with rocks awash, lies centered 0.4 mile N of the N end of Bondebrotten.

Dynabrott Light (58°17.8'N., 11°18.5'E.) is shown from a prominent floodlit tower with a helicopter platform, 26m high, standing on the southeasternmost rock of Bondebrotten, 3.7 miles SE of Hallo Light.

Brandskarsflak Light (58°17.6'N., 11°18.7'E.), equipped with a racon, is shown from a prominent floodlit tower with a helicopter platform, 26m high, standing on a shoal, 0.2 mile SSE of Dynabrott Light.

Djupstabaden, a detached shoal bank, lies 1.5 miles WSW of Dynabrott Light. It has a least depth of 5m and forms the outermost danger in this vicinity.

Vastingskaren, a group of islets and rocks, lies centered about 1.5 miles E of Brandskarsflak Light.

Tan Light (58°17.8'N., 11°19.6'E.) is shown from a floodlit tower, 8m high, standing on the northwesternmost islet of Vastingskaren, 0.6 mile ENE of Brandskarsflak Light.

Lilla Korno lies 1.3 miles ENE of Tan Light. This island has a high light-colored summit.

Svensholmen Light (58°18.7'N., 11°21.9'E.) is shown from a tower, 7m high, standing on an islet lying close N of Lilla Korno.

Karva Light (58°19.5'N., 11°21.7'E.) is shown from a flood-lit tower, 11m high, standing on a reef fringing the S side

of Karva Islet, 0.8 mile N of Svensholmen Light.

Brofjordens Angoring Lighted Buoy (58°15'N., 11°13'E.), equipped with a racon, is moored about 3.8 miles SW of Brandskarsflak Light.

Ornefjorden (58°23'N., 11°19'E.) extends about 1.6 miles N and is entered close W of the N end of Malmon.

Abyfjorden (58°23'N., 11°24'E.) extends about 8 miles NNE and is entered close E of the N end of Malmon.

Although anchorage is available in the lower part of Abyfjorden, both this fjord and Ornefjorden are of no commercial significance.

Several harbors and marinas, used only by fishing vessels and pleasure craft, are located in the area of Ornefjorden, Abyfjorden, and Brofjorden. The main harbors include the following:

1. Malmon (58°21.0'N., 11°20.5'E.).
2. Ryxo (58°22'N., 11°27'E.).
3. Lilla Korno (58°18.5'N., 11°22.2'E.).
4. Stora Korno (58°18.3'N., 11°22.8'E.).

5.13 Brofjorden (58°22'N., 11°25'E.) (World Port Index No. 23950) extends about 4 miles NNE and is entered 1.5 miles E of Malmon. Trommekilen branches SE from this fjord about 1.5 miles above the entrance.

Premraff Oil Refinery, which is served by Brofjorden Oil Harbor, is situated on the S side of the entrance to Tromme-



By W. Carter [CC BY-SA (<https://creativecommons.org/licenses/by-sa/4.0/>)] from Wikimedia Commons
Preemraff Lysekil

kilen.

Depths—Limitations.—Brofjorden is approached through two channels. The main approach channel leads NE for about 7 miles from close NW of the Brofjordens Angoring Lighted Buoy (58°15'N., 11°13'E.) and passes between Dynabrott Light and Brandskarsflak Light. It continues NE and passes NW of Tan Light, NW of Svensholmen Light, and SE of Karva Light. The fairway has a minimum width of 290m, for a length of about 700m, and is authorized for drafts up to 12m as far as Trommekilen.

A secondary approach channel leads E and passes between the buoys marking the S end of Malmobrotten and the N end of Bondebrotten. The fairway, which is authorized for drafts up to

8m, joins the main channel about 0.7 mile W of Svensholmen Light.

The oil harbor provides five berths. Raoljehammen, a crude oil berth, is situated on the E side of the fjord, about 1 mile above the entrance.

Produktthamen, a product terminal jetty, extends 380m ENE from the S shore of Trommekilen and provides four berths. The port can accommodate vessels up to 500,000 dwt, 230m in length, 23m beam, and 25m draft.

The two inner berths that can accommodate vessels up to 120m in length and 8m draft.

For more berthing information see the table titled **Borfjorden—Berth Information**.

Borfjorden—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
Tanker Terminal							
Crude Oil	135m	28.0m	—	25.0m	—	500,000 dwt	Crude and bunkers.
No. 1	38m	8.8m	120m	8.0m	23.0m	10,000 dwt	Petroleum products, LPG, and bunkers.
No. 2	70m	16.0m	230m	14.4m	—	95,000 dwt	Petroleum products and bunkers.
No. 3	70m	16.0m	230m	14.4m	—	95,000 dwt	Petroleum products and bunkers.
No. 4	13m	8.0m	100m	7.0m	—	2,000 dwt	Petroleum products, LPG, and bunkers. Liquefied gas carriers can have a maximum LOA of 100m.
No. 5	52m	13.9m	200m	11.6m	—	40,000 dwt	Petroleum products, LPG, and bunkers.

Aspect.—Brofjorden Angoring Lighted Buoy and Brandskarsflak Light are equipped with racons. The main approach channel is marked by lighted buoys and indicated by a lighted range. In addition, the outer limits of the fairway are indicated by lighted ranges and light sectors, which may best be seen on the chart.

Conspicuous wind generators stand near the ends of an islet lying 1 mile ENE of Svensholmen Light. Several conspicuous flares and chimneys stand in the vicinity of the Preemraff Oil Refinery. The two highest chimneys have an elevation of 165m.

Pilotage.—The Lysekil station provides pilots for Brofjorden. Pilotage is available 24 hours and is compulsory for the following vessels (see paragraph 5.1 for definitions of vessel categories):

1. Brofjorden Approach to Lysekil, Marstrand (via Kyrkesund) to Lysekil:
 - a. All Category 1 vessels.
 - b. Category 2 vessels of 70m loa, or 14m beam, 4.5m draft and over.
 - c. Category 3 vessels of 70m loa, or 14m beam and 4.5m draft and over.
2. Uddevalla to Lysekil:
 - a. All Category 1 vessels.
 - b. Category 2 vessels of 70m length or 14m beam, and 4.5m draft and over.
 - c. Category 3 vessels of 70m length or 14m beam, and 4.5m draft and over.

Pilot ordering should normally be carried out via the e-Services section on the Swedish Maritime Administration web site (<https://www.sjofartsverket.se/en>), in conjunction with the reporting on the Vessel Reporting System (FRS) section.

1. A preliminary pilot request must be made via the FRS at least 24 hours in advance.
2. The definitive pilot request must be made via the FRS at least 5 hours in advance.
3. In exceptional cases, the pilot may be ordered via e-mail, telephone, or VHF.
4. The pilot boarding areas are located in the following positions:
 - a. Pilot Boarding Area No. 1—Located 1.2 miles SW of Brofjorden Approach Lighted Buoy) at position 58°14.3'N, 11°11.3'E.
 - b. Pilot Boarding Area No. 2—Located 3 miles SW of Brofjorden Approach Lighted Buoy at position 58°13.3'N, 11°08.7'E.

Generally, two pilots are required for vessels over 60,000 gt, 260m in length, or 40m beam.

VLCCs should send an ETA to the oil terminal 72 hours in advance, with amendments sent 48 hours and 24 hours prior to arrival.

Product tankers should send an ETA to the oil terminal 48 hours in advance, with amendments sent 24 hours prior to arrival.

The Port of Brofjorden is controlled from Sodertalje.

Contact Information.—See the table titled **Brofjorden—Contact Information**.

Regulations.—The approaches to Brofjorden lie within the Lysekil VTS area (see paragraph 5.15).

All loaded and ballasted crude oil tankers and all loaded

product tankers exceeding 20,000 dwt bound for Brofjorden must be escorted by tugs commencing from the waters lying 3 miles S of the Brofjordens Angoring Lighted Buoy.

Brofjorden—Contact Information	
Port	
VHF	VHF channel 10
Telephone	46-104-503227
	46-104-503455
Facsimile	46-104-503574
Pilots	
Call sign	Lysekil Pilot
VHF	VHF channel 10
Telephone	46-771-630-650
Facsimile	46-31-647-779
E-mail	westcoastpilot@sjofartsverket.se
Web site	https://www.sjofartsverket.se
	https://mswreportal.se

Meeting or overtaking an escorted crude oil tanker, in the area between Brofjorden Buoy No. 1 and Brofjorden Buoy No. 2 and a line between buoys Hastebadan and Komogundet, is not recommended. Likewise, vessels should use great caution when meeting and overtaking other types of escorted vessels in this part of the fairway.

The berthing of VLCCs is restricted when either the current at the outer lighted buoys exceeds 1 knot, the visibility is under 4 miles, or the wind force exceeds 12m per second.

Anchorage.—An anchorage area, for the use of ULCCs and VLCCs, lies centered 4 miles SSW of Brofjordens Angoring Lighted Buoy. This area has depths 57 to 72m and may best be seen on the chart.

Four anchorages, designated A to D, lie close E of the S part of Malmon (58°20'N., 11°20'E.) and may best be seen on the chart. These anchorages have a depth of 30, clay, with good holding ground.

Large vessels, with local knowledge, can obtain sheltered anchorage, in a depth of 19m, clay, close to the SE side of the channel, 1.3 miles NE of Svensholmen Light. Vessels up to 10,000 dwt can anchor here, but there is limited space and the holding ground is not especially good.

Caution.—Due to the residual danger from buried mines, an area, within which anchoring and fishing are prohibited, lies centered 3.5 miles SSE of Brofjordens Angoring Lighted Buoy and may best be seen on the chart.

An area, within which special regulations apply to fishing vessels, extends NE from Brofjordens Angoring Lighted Buoy and may best be seen on the chart.

Several submarine cables, which may best be seen on the chart, lie within the approaches and the fjord.

5.14 Gaven Light (58°16'N., 11°21'E.) is shown from a tower, 9m high, standing on an islet lying 1.8 miles SE of

Brandskarsflak Light. A beacon is situated on the SW extremity of this islet.

Trillingarna, a group of islets and shallow shoals, fronts the light on its WNW side.

Gulskaren Light (58°16.8'N., 11°23.5'E.) is shown from a tower, 6m high, standing on the S end of an islet lying 1.4 miles ENE of Gaven Light.

Flatholmen Light (58°15.7'N., 11°24.8'E.) is shown from a structure standing on the NE side of a small island, 2 miles ESE of Gaven Light.

Stangholmen Light (58°16.0'N., 11°24.9'E.) is shown from a structure standing on the E end of an islet lying 0.3 mile N of Flatholmen Light.

Slaggabaden Light (58°15.9'N., 11°26.4'E.) is shown from a floodlit tower, 8m high, standing on a reef at the entrance to the harbor, 0.7 mile E of Stangholmen Light.

Lysekil Redd Light (58°16.1'N., 11°27.2'E.) is shown from a structure standing on Tova, an above-water rock, lying 0.5 mile ENE of Slaggabaden Light.

Hatten Light (58°10.5'N., 11°22.5'E.) is shown from a tower, 9m high, standing on an islet lying close off the W side of Harmano Island, 5.8 miles SSE of Gaven Light.

Islandsberg Light (58°12.1'N., 11°24.3'E.) is shown from a tower, 7m high, standing on the SW side of Skaftolandet, Island, 1.9 miles NE of Hatten Light.

The waters lying between Gaven Light and Hatten Light, which form the approaches to Lysekil, are encumbered by numerous islands, islets, rocks, and shoals which may best be seen on the chart.

Tovas Ungar, a group of rocks awash, lies about 3.2 miles SW of Gaven Light and is marked close W by a lighted buoy. A wreck, with a least depth of 11m, lies about 0.4 mile WNW of this group.

Vastra Flak, a shoal patch with a least depth of 2m, lies about 0.7 mile SSE of Tovas Ungar at the W side of a group of shallow rocky shoals.

Bonden lies about 3.8 miles SSW of Gaven Light and is high with gently sloping sides. This island may be easily identified by its dark color which contrasts noticeably with the land behind. It is steep-to except on the S side and is surmounted by a prominent beacon, 8m high.

Skramjas Ungar, a shoal patch with rocks awash, lies about 1.6 miles WNW of Hatten Light and is marked by a buoy.

Knappens Flak, a detached shoal with a least depth of 4.2m, lies about 1.1 miles W of Hatten Light and a shoal patch, with depths of 7.5 to 9m, is located 0.5 mile SE of it.

The above island and shoals form the outermost dangers lying in the approaches to Lysekil.

Several small harbors and marinas, used only by fishing vessels, small craft, and pleasure boats, are located in the area of Lysekil.

The main harbors include the following:

1. Valbodalen (58°17'N., 11°26'E.).
2. Grundsund (58°13'N., 11°25'E.).
3. Fiskebackskil (58°15'N., 11°28'E.).

5.15 Lysekil (58°16'N., 11°26'E.) (World Port Index No. 23970) is situated on the SW end of a promontory which is located on the NW side of the entrance to Gullmarn.

Gullmarn, also known as Gullmarnsfjorden, extends 10

miles NE from Lysekil, but is of little commercial significance.

Groto, a small peninsula, extends S from the E end of the town and the main commercial quays are located within a basin at its NW side.

Lysekil Home Page

<http://www.lysekil.se>

Winds—Weather.—Winds from W and SW predominate. Fog is frequent in winter, but it is rare during the summer.

Ice.—Ice forms in the approach channels but usually does not hinder navigation at any time of the year.

Tides—Currents.—The tidal range is generally less than 0.5m; however, the water level may be affected considerably by wind variations. It rises with W winds and falls with E winds.

Generally, a weak current sets N in the approaches. However, under certain wind conditions, the current may become much stronger.

Depths—Limitations.—The main approach route from seaward is authorized for drafts up to 10m. The largest vessel accommodated in the harbor was 50,000 dwt.

The main quays in the harbor basin include Gullmarskajen, at the N side, and Grotokajen on the S side.

Anderssonskaj, located at the W side of the harbor, is a passenger quay.

Grotorevkajen, located at the SE end of the peninsula, is a container quay. Fiskhamnen is in the fishing harbor that connects to the fish hall. Fiskhamnen is 100m in length with a depth of 5m alongside. All berths are connected with the railway network. For more berthing information see the table titled **Lysekil—Berth Information**.

There are facilities for general cargo, bulk, passenger ferry, container, and fishing vessels. There is also an extensive marina.


Lysekil—Berth Information

Berth	Length	Depth	Remarks
General Cargo Terminal (Gullmarskajen)			
Gullmarskajen	180m	9.6m	General cargo.
General Cargo Terminal (Grotokajen)			
Grotokajen	170m	6.7m	General cargo.
Container Terminal (Grotorevskaj)			
Grotorevskaj	190m	11.5m	Containers.
Passenger Terminal (Anderssonskaj)			
Anderssonskaj	140m	5.6m	Passengers.

Aspect.—A church, situated in the SE part of the town, has a spire, 90m high, which is prominent from seaward.

Vallbodalsros, 58m high, rises about 0.5 mile N of the town and is prominent. This light-colored hill slopes gradually on the N and S sides and its summit is surmounted by a cairn and a mast.

Pilotage.—Pilotage to Lysekil is compulsory for the following vessels (see paragraph 5.1 for definitions of vessel categories):

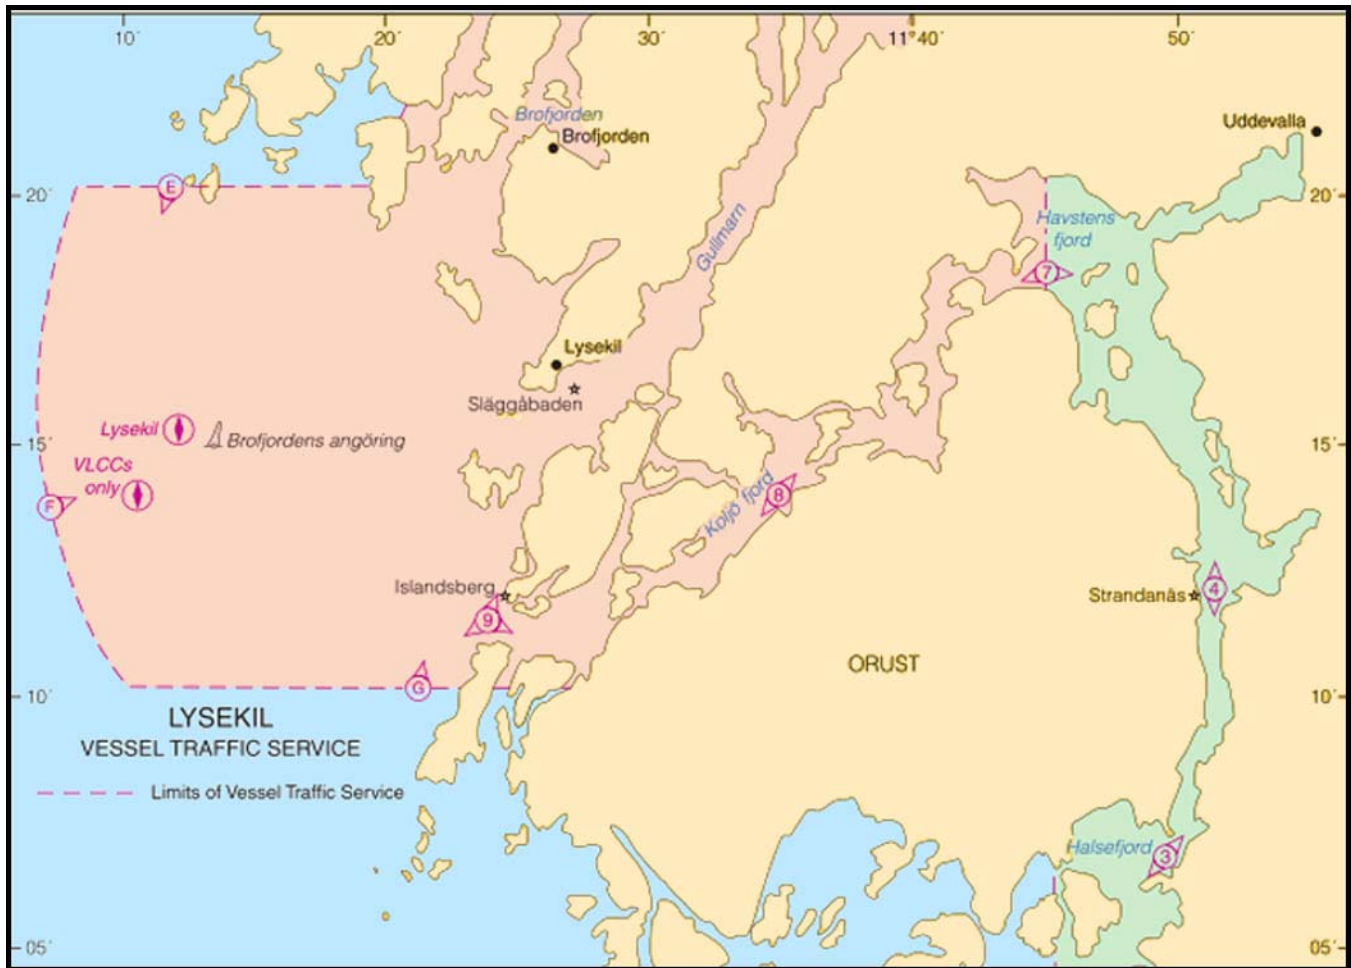

Lysekil VTS and Pilot Areas

1. Brofjordens Angoring to Lysekil and Marstrand to Lysekil (via Kyrkesund):
 - a. All Category 1 vessels.
 - b. Category 2 vessels of 70m length or 14m beam and 4.5m draft or over.
 - c. Category 3 vessels of 70m length or 14m beam and 4.5m draft or over.
2. Uddevalla to Lysekil:
 - a. All Category 1 vessels.
 - b. Category 2 vessels of 70m length, 14m beam, and 4.5m draft and over.
 - c. Category 3 vessels of 70m length, 14m beam, and 4.5m draft and over.

Lysekil—Pilot Information	
Boarding Positions	
Area No. 1	58°14.3'N, 11°11.3'E.
Area No. 2	58°13.3'N, 11°08.7'E.
Contact Information	
Call sign	Lysekil Pilot

Lysekil—Pilot Information	
VHF	VHF channel 10
Telephone	46-771-630-650
E-mail	westcoastpilot@sjofartsverket.se
Web site	https://www.sjofartsverket.se

Initial ordering of pilots should be carried out via the e-services section on the Swedish Maritime Administration internet web site, in conjunction with Vessel Reporting System (FRS), see paragraph 5.1. In exceptional cases, pilots (call sign: Lysekil Pilot) may be ordered by telephone or on VHF channel 10. A preliminary request for pilotage should be made at least 24 hours in advance. A definitive pilotage request must be made via the Pilot Request System at least 5 hours in advance.

Regulations.—Vessels must report to the Malo-Strommar ferry, on VHF channel 11, 30 minutes before their anticipated passage or, at the latest, on reaching Reporting Point No. 9 (inbound) or No. 8 (outbound). When the ferry is moored at the Malo side, the maximum depth over the cable is 5m or less.

Vessels with drafts over 3m and equipped with VHF must report to the Bohus-Malmon ferry on VHF channel 6 before

passing the W point of Bjornholmen (58°21.7'N., 11°19.8'E.) (eastbound) and the N point of Store Holme (58°21.3'N., 11°21.3'E.) (westbound). Vessels should maintain a leeway of 200m from the ferry.

Vessel Traffic Service.—A Vessel Traffic Service (VTS) system operates in the approaches to the coast in the vicinity of Lysekil. The VTS Control is operated from Sodertalje.

The VTS system is mandatory for the following:

1. Vessels of 45m in length and over.
2. Vessels of 300 gt and over.
3. Tows over 45m in loa).
4. All vessels of 20 gross tons and over or of 15m loa and over.
5. Small registered fishing vessels must participate if their activity could impair the safe passage of vessels transiting.

All vessels in the VTS area must maintain a continuous listening watch on VHF channels 10 and 16.

The VTS area limits are indicated by a line joining the following positions:

1. Position 58°21.8'N, 11°20.5'E.
2. North Malmon (58°21.5'N., 11°20.2'E.).
3. Malmon, Kvarnviksholmar (58°20.0'N, 11°19.0'E.).
4. West of Hallo (58°20.0'N, 11°07.9'E.).
5. Sejebaden Lighted Buoy (58°21.0'N., 11°09.3'E.).
6. Vajern (58°23.0'N., 11°15.7'E.).
7. An arc with a radius of 10.5 miles centered on Slagbaden Light (58°15.9'N., 11°26.3'E.).
8. Southsouthwest of the VLCC anchorage (58°10.0'N., 11°09.9'E.).
9. Lavosund (58°10.0'N., 11°26.0'E.).

The area also includes Haestensfjord W of longitude 11°45.0'E.

The VTS boundary acts as the Reporting Line for the Lysekil VTS.

Vessels must submit reports, as follows:

1. Before entering the VTS area and immediately prior to departure from a berth or anchorage:

ID	Information required
A	Vessel's name and call sign
C or D	Name of nearest reporting line or geographic position
L	Planned route
I	Destination
O	Actual draft

2. When passing the Reporting Points, listed in the table titled **VTS Reporting Positions**, as follows:

ID	Information required
A	Vessel's name and call sign
—	Reporting point (specify which point)
I	Destination

3. When deviating from the planned route:

ID	Information required
A	Vessel's name
C or D	Position
L	New planned route
I	Destination

4. When arriving at an anchorage or berth:

ID	Information required
A	Vessel's name and call sign
C or D	Name of nearest reporting line or geographical position

5. When damage has occurred to machinery, engine or navigational equipment which could affect the vessel's safe navigation and maneuverability.

ID	Information required
A	Vessel's name
C or D	Position
I	Destination
Q	The defect or damage causing the vessel to report

6. Vessels in excess of 20 gt, 15m or more in length, and smaller registered fishing vessels should report if their voyage or activity may influence the safe maneuvering of other vessels.

7. Vessels shall also give information at any other times upon request from the VTS along with any supplementary information considered necessary for the safety and efficiency of the vessel traffic in the VTS area.

The Lysekil VTS Control provides information on traffic in the area and other navigational details, including ice conditions and passage limitations.

All vessels within the VTS area must maintain a continuous listening watch on VHF channels 11 and 16.

VTS Reporting Positions			
ID	Name	Position	Remarks
E	Hallo	58°10.5'N, 11°11.5'E	Inbound only
F	W of Brofjordenanchoring	58°13.5'N, 11°07.0'E	Inbound only
G	Svangen	58°10.0'N, 11°21.5'E	Inbound only
7	Havstensfjord	58°18.5'N, 11°45.0'E	Westbound only

VTS Reporting Positions			
ID	Name	Position	Remarks
8	Koljio	58°18.4'N, 11°45.0'E	—
9	Islandsber	58°11.7'N, 11°24.0'E	—

Contact Information.—See the table titled **Lysekil—Contact Information**.

Lysekil—Contact Information	
Port	
Telephone	46-523-14090
Facsimile	46-523-14094
Web site	http://www.lysekil.se
VTS Control	
Call sign	VTS Lysekil
VHF	VHF channel 10
Telephone	46-771-630-650
E-mail	vtswestcoast@sjofartsverket.se

Anchorage.—Temporary anchorage, sheltered from W and SW winds, can be taken, in depths of 13 to 20m, sand and mud, about 0.3 mile ENE of the beacon on Bonden.

Vessels can anchor in the vicinity of the harbor, in depths of 25 to 30m, close E of the container quay or close S of Lysekil Redd Light.

Directions.—The main approach route from seaward leads ENE for about 4 miles, using the white sector of Gaven Light, from a position located about 0.5 mile SE of Brofjordens Angoring Lighted Buoy. The route then passes close SSE of Gaven Light and, using the white sector of Gulskaren Light, leads in a NE direction for about 1 mile. When about 0.4 mile distant from Gulskaren Light, the route leads in a SE direction for about 0.8 mile, using the white sector of Flatholmen Light. It continues in a SE direction through the off-lying dangers and passes SW of Stangholmen Light. The route then leads E toward the harbor and passes S of Slaggabaden Light. It continues N into the harbor and passes between Slaggabaden Light and Lysekil Redd Light.

A secondary approach route from seaward leads NE for about 5.5 miles from a position located 0.5 mile NW of Bonden. This route, which is authorized for drafts up to 8m, joins the main route about 0.4 mile SSW of Gavan Light.

An alternate approach route, which is authorized for drafts up to 8m, leads in an E direction for 4 miles from a position located 1.4 miles WSW of Gaven Light. This route can only be used during calm weather and good visibility.

Another secondary approach route, which is authorized for drafts up to 8m, leads in a NNE direction from close SW of Hatten Light. This route, which passes close WNW of Islandsberg Light, leads between the W side of Skaftolandet and the off-lying dangers. It should not be used during strong W winds. This route may also be entered from WNW by passing 0.8 mile SSW of Bonden. The track leads ESE, using the white sector

of Hatten Light, and then turns NNE.

Caution.—A degaussing range, consisting of seven dolphins, is situated close S of the S side of Groto peninsula. A restricted area, best seen on the chart, surrounds the range. Unauthorized entry is prohibited. A separate restricted area surrounds the small wind farm located just E of the Groto peninsula.

Several submarine cables and pipelines, best be seen on the chart, lie in the approaches and in the vicinity of the harbor.

A ferry runs between the harbor and Fiskebackskill, 1.5 miles SSE.

A entry prohibited area lie close S of Flatholmen between Lysekil Redd Light and the S side of Groto. For additional information regarding similar restricted areas in the approaches, see the caution paragraph in paragraph 5.13.

A wave-power farm has been established in an area centered about 1.4 miles NNW of Hatten Light (11°22.5'E.).

Approaches to Uddevalla

5.16 The principal seaward approaches to Uddevalla are from the S and extend between Maseskar Light and Hatteberget Light, 14.5 miles SSE. The approaches are encumbered by numerous islands, islets, rocks, and shoals which may best be seen on the chart. The two largest islands are Orust (58°10'N., 11°40'E.) and Tjorn (58°00'N., 11°40'E.), close S. The main approach is known as South Channel and is described in paragraph 5.17 (under Directions—South Channel).

Vessels may also approach Uddevalla via North Channel. This approach route is described in paragraph 5.17 (under Directions—North Channel); however, it is only authorized for vessels with a maximum draft of 4m and a maximum length of 70m.

Several other smaller channels, which lie between Orust and Tjorn, are described in paragraph 5.17 (under Directions—Other Channels).

Tides—Currents.—The water level in the seaward approaches to Uddevalla may be affected by the wind. The level rises during winds from W and falls during winds from E. The changes in the water level range from 1.5m above mean sea level to 1.1m below it. Generally, the fall at LW does not decrease the mean water level by more than 0.7m.

Pilotage.—Pilotage to Uddevalla is compulsory for the following vessels (see paragraph 5.1 for definitions of vessel categories):

1. Hatteberget to Uddevalla:
 - a. All Category 1 vessels.
 - b. Category 2 vessels of 80m length or 15m beam and over.
 - c. Category 3 vessels of 90m length or 16m beam and over.
2. Brofjordens Angoring Lighted Buoy and Lysekil (via Malo-Strommar) to Uddevalla:
 - a. All Category 1 vessels.
 - b. Category 2 vessels of 70m length, 14m beam, and 4.5m draft and over.
 - c. Category 3 vessels of 70m length, 14m beam, and 4.5m draft and over.

Generally, initial ordering of pilots should be carried out via the e-services section on the Swedish Maritime Administration

internet web site, in conjunction with Vessel Reporting System (FRS). See paragraph 5.1. In exceptional cases, pilots (call sign: Marstrand Pilot) may be ordered by telephone or on VHF channel 10. A preliminary request for pilotage should be made at least 24 hours in advance. A definitive pilotage request must be made via the Pilot Request System at least 5 hours in advance.

Pilots board in the following positions:

1. In position 58°14.3'N, 11°11.3'E, about 1.2 miles SW of Brofjordens Angoring Lighted Buoy

2. In position 57°50.5'N, 11°24.9'E, about 2 miles SW Hatteberget Light.

Contact Information.—See the table titled **Uddevala—Contact Information.**

Uddevala — Contact Information	
Operations	
Call sign	Uddevala Hamnradio
	Uddevala Harbor Radio
VHF	VHF channels 11, 14, and 16
Telephone	46-522-91300
E-mail	port@uddevalla-hamn.se
Port Authority	
Telephone	46-522-91200
E-mail	info@uddevalla-hamn.se
Web site	https://www.uddevalla-hamn.se
Pilots	
Call sign	Marstrand Pilot
VHF	VHF channel 10
Telephone	46-771-630650
E-mail	westcoastpilot@sjofartsverket.se
Web site	https://www.sjofartsverket.se/en

Regulations.—The approaches to Uddevalla lie within the Marstrand VTS area (see paragraph 5.20). The port of Uddevalla is controlled from Sodertalje.

5.17 Maseskar Light (58°06'N., 11°20'E.) is shown from a prominent tower, 13m high, standing on an islet of the same name lying 5 miles SSW of Hatten Light. A conspicuous disused framework light tower, 22m high, is situated close NE of the light.

Maseskar lies near the S end of a chain of islets and rocky shoals which extends about 5 miles S from the S side of Harmano. Svarten, an islet, lies on a shoal bank about 0.6 mile SSE of Maseskar Light and is marked by a beacon.

Makrillebaden (58°03'N., 11°20'E.), with a least depth of 12m, lies 2.3 miles S of Maseskar Light. This shoal bank is located at the S end of the dangers extending from Harmano and vessels should keep well clear of it during heavy weather.

Kraksundsgap Sodra Light (58°06.0'N., 11°26.4'E.) is shown from a prominent tower, 13m high, standing on the NW

extremity of an islet lying 3.5 miles ENE of Maseskar Light.

Hatteberget Light (57°52'N., 11°28'E.), equipped with a racon, is shown from a prominent tower surmounted by a helicopter platform, 26m high, standing on a rocky shoal lying 14.5 miles SSE of Maseskar Light.

An isolated shoal, with a least depth of 12m, lies close SE of the light and is marked by a lighted buoy.

Storebaden lies centered 0.7 mile NNW of Hatteberget Light and has a least depth of 8.5m. This detached shoal bank is marked by a lighted buoy, moored close SW, and a buoy, moored close NNW.

Krakebaden lies centered 1.1 miles ESE of Hatteberget Light. This detached shoal bank has a least depth of 3.3m and is marked by a lighted buoy moored close NNW.

Hamneskar Light (57°54'N., 11°28'E.) is shown from a lattice mast, 9m high, standing on an islet lying near the SW end of Pater Noster Skaren, 2 miles NNE of Hatteberget Light. The disused framework light tower of Pater Noster also stands on this islet and is prominent from seaward.

Pater Noster Skaren (58°03'N., 11°20'E.) is an extensive chain of low-lying islets, rocks, and shoals extending about 5 miles SW from the S end of Tjorn.

Dynan, an above-water rock, lies about 1 mile W of Hamneskar Light and is the outermost danger at the SW end of Pater Noster Skaren.

Skallen Light (57°53.4'N., 11°33.5'E.) is shown from a tower, 6m high, standing on the NW extremity of Marstrandson, 3.6 miles ENE of Hatteberget Light.

Eggskar Light (57°56.8'N., 11°31.1'E.) is shown from a tower, 7m high, on the E extremity of an islet lying at the NE side of Pater Noster Skaren, 3.3 miles NNE of Hamneskar Light; a prominent beacon stands on the N side of the islet.

Astol Light (57°55.3'N., 11°35.1'E.) is shown from a floodlit tower standing on the S side of an islet lying 2 miles NNE of Skallen Light.

Boxvike Kile (58°07'N., 11°30'E.), 117m high, is the tallest hill in the SW part of Orust. It rises 5.5 miles ENE of Maseskar Light and is prominent from seaward. A hill with three peaks stands about 0.5 mile SE of Boxvike Kile.

Stigberget (58°04'N., 11°33'E.), 88m high, rises at the NW end of Tjorn, 7.5 miles ESE of Maseskar Light. This hill slopes gradually on all sides and is prominent from seaward.

Traneros rises 0.4 mile S of Stigberget. This hill is 97m high and much steeper.

Sankt Olofs Valar (58°01'N., 11°31'E.), a dark-colored hill, rises 3 miles SSW of Stigberget and is prominent from seaward. It is surmounted by four hummocks of which only three can usually be identified. Three beacons are situated on the summit and a conspicuous radio mast, 75m high, stands close S of them.

Vetteberget (57°58'N., 11°37'E.), 116m high, slopes gradually on its S side and is prominent from seaward. This hill stands in the S part of Tjorn 2.4 miles NNE of Astol Light.

Tjorne Huvud (57°56'N., 11°35'E.) rises on the S end of Tjorn 0.8 mile N of Astol Light. This prominent hill has a conical peak and is quite steep on all sides. It is reported to be more easily distinguishable than Vetteberget.

A conspicuous radio mast, 75m high, stands at an elevation of 130m about 0.7 mile NNW of Tjorne Huvud.

Bratton (57°55'N., 11°44'E.), 131m high, is the summit of



Maseskar Light

an islet lying 5 miles E of Astol Light. This conspicuous hill has a bluish color when seen from a distance to seaward.

Directions—South Channel.—The main South Channel to Uddevalla can be divided into two parts. The S part lies between Tjorn and the mainland to the E; while the N part lies between the E side of Orust and the mainland.

The route in the S part leads in a NE direction from the vicinity of Hatteberget Light (57°52'N., 11°28'E.). It initially leads NE for about 5 miles through Marstrandsfjorden (57°53'N., 11°31'E.) and continues E for 2.5 miles through Al-goffjorden (57°55'N., 11°40'E.). The route then leads NE and NNE for 10 miles through Hakefjorden (57°58'N., 11°44'E.) and Askerofjorden (58°04'N., 11°47'E.) to a position located off Stenungsund (58°05'N., 11°49'E.).

From seaward three entrance tracks, which may best be seen on the chart, lead into the S end of South Channel, as follows:

1. The northernmost track leads in an ENE direction toward Skallen Light (57°53.4'N., 11°33.5'E.) from a position located 1.9 miles NW of Hatteberget Light. It passes NNW of Storebaden and joins the central track at a position located about 2 miles NE of Hatteberget Light.

2. The central track leads NE in the white sector of Astol Light (57°55.3'N., 11°35.1'E.). It passes between Hatteber-

get Light and Storebaden.

3. The southernmost track leads in a NE direction and passes between Hatteberget Light and Krakebaden. It joins the central track at a position located about 2 miles NE of Hatteberget Light.

The route through the S part of South Channel is authorized for drafts up to 15m as far as Algotfjorden and up to 13.5m as far as Askerofjorden (Stenungsund).

The fairway is spanned by the Tjornbron Suspension Bridge (58°03.5'N., 11°46.9'E.), WSW of Stenungsund, which has a vertical clearance of 43m over a passage width of 110m.

The route in the N part of the South Channel leads in a N direction for about 14 miles from the vicinity of Stenungsund through Halsefjorden (58°07'N., 11°48'E.), Svanesund (58°08'N., 11°50'E.) and Bjorningarna (58°16'N., 11°50'E.) to the S side of Havstensfjord (58°19'N., 11°47'E.). The route then continues ENE for about 4 miles through Vrangelyckan (58°19'N., 11°49'E.) and Sunningsund, close E, to Uddevalla.

The route in the N part of the South Channel, from Askerofjorden to the entrance to Uddevalla, is authorized for drafts up to 11m.

An overhead cable spans the fairway at Grotaholme (58°09.5'N., 11°51.5'E.) and has a vertical clearance of 58m.

The Uddevallabron Bridge spans the fairway at Sunningesund and has a vertical clearance of 47m.

Directions—North Channel.—The main North Channel to Uddevalla leads in a NE direction between the mainland and the NW side of Orust. It passes through a series of fjords which, in order from SE to NW, are Koljofjord (58°14'N., 11°35'E.), Borgilefjorden (58°15'N., 11°38'E.), Kalvofjord (58°17'N., 11°40'E.), and Notesund (58°18'N., 11°42'E.).

From the NE end of Notesund, the channel leads into the W side of Havstensfjord (58°19'N., 11°45'E.) and joins the N end of the South Channel.

A fixed bridge, with a central passage 102m wide, spans Notesund. It has a vertical clearance of 25m over a navigable width of 50m.

North Channel can be entered from the vicinity of Lysekil (see paragraph 5.15). This secondary route leads S for 1.5 miles, passing between the NE side of Skaftolandet and the mainland. It then continues ESE for 2 miles and enters the NW side of Koljofjord. The route passes NNE of Bassholmen (58°14.5'N., 11°30.0'E.) and through Stommarna, which lies between the mainland and Flaton. The fairway is intricate and only authorized for drafts up to 3.3m. It passes under a bridge with a vertical clearance of 16.8m.

The main entrance route to North Channel leads in a NNE direction from close SW of Hatten Light (58°10.5'N., 11°22.5'E.). After passing close WNW of this light, the route continues for 1.3 miles, using the white sector of Islandsberg Light. It then leads ESE into Ellosefjorden (58°11'N., 11°27'E.), passing between the S end of Skaftolandet and the N end of Harmano.

This route may also be entered from WNW by passing 0.8 mile SSW of Bondon (58°12.6'N., 11°19.0'E.). The track leads ESE, using the white sector of Hatten Light, and then turns NNE.

From Ellosefjorden, the entrance route leads in a NE direction through Malo Strommar (58°11.8'N., 11°29.4'E.) and Bjornsundskanalen (58°12.5'N., 11°30.5'E.) into the SW end of Koljofjord.

The North Channel to Uddevalla is authorized for drafts up to 5m and has a least bottom width of 40m. The entrance route as far as Ellosefjorden is authorized for drafts up to 7.5m.

Due to a bottom width of only 40m in the turns, it is reported that vessels are limited to a length of about 70m. Vessels with drafts or lengths above these limits are advised to use the South Channel.

Directions—Other Channels.—A sheltered inner passage route leads in a S direction through the approaches from the vicinity of Islandsberg Light (58°12'N., 11°24'E.) to Marstrand (55°53'N., 11°35'E.). This route is authorized for drafts up to 4m and is used only by local ferries, coasters, small craft, fishing vessels, and pleasure boats. The channel is narrow in places and requires local knowledge.

A secondary approach route to Uddevalla leads from W between the S side of Orust and the N side of Tjorn. It passes through Krakefjord (58°03'N., 11°30'E.), Hastesskarsfjorden (58°03.5'N., 11°31.5'E.), Stigfjorden (58°04'N., 11°35'E.), Skapesund (58°05.6'N., 11°42.3'E.), and Askerofjoeden (58°04'N., 11°47'E.). This route is spanned by an overhead cable, with a vertical clearance of 29m, and the Skapesund Bridge, with a vertical clearance of 21m. It is authorized for

drafts up to 3.2m and is only used by small craft, fishing vessels, and pleasure boats, with local knowledge.

Vessels arriving from abroad are boarded by Customs Officers at Hattan (57°56'N., 11°40'E.). The Customs House is in Uddevalla.

Caution.—Several submarine cables and pipelines lie across the approach routes and may best be seen on the chart.

A line-driven ferry crosses Malo Strommar (North Channel) near Hallen (58°11.7'N., 11°29.5'E.). Vessels must report to the ferry 30 minutes before their passage on VHF channel 11.

On autumn and winter night, the high shores of some of the fjords often cast heavy and misleading shadows. Local banks of mist can also be encountered along the routes.

The tidal currents within the narrows at Malo Stromma and Bjornsundskanalen (North Channel) may attain rates up to 3.5 knots.

The tidal current setting S within the narrows at Svanesund (58°08'N., 11°50'E.) may attain a rate up to 3.5 knots.

A vehicle ferry crosses Svanesund (South Channel) but is obliged to give way to vessels transiting the sound. Contact with the ferry before passing can be made on VHF channel 10.

In the vicinity of the Tjornbron Suspension Bridge, the view of the channel ahead is obstructed and vessels may be met with little warning.

Due to residual danger from mines buried on the bottom, vessels are cautioned not to carry out any seabed activities in an area, with a radius of 0.5 mile, centered on position 57°57'N, 11°11'E; in an area, with a radius of 0.5 mile, centered on position 57°57'N, 11°18'E; and in a large area centered 5 miles S of Hatteberget Light, which may best be seen on the chart.

5.18 Several small harbors and marinas are situated among the islands and islets lying in the approaches to Uddevalla. They are used only by local ferries, small coasters, fishing vessels, small craft, and pleasure boats. The main harbors include the following:

1. Karingon (58°07'N., 11°22'E.).
2. Kladesholmen (57°57'N., 11°32'E.).
3. Mossholmen (57°57.1'N., 11°33.6'E.).
4. Ronnang (57°56.5'N., 11°34.7'E.).
5. Halleviksstrand (58°07.4'N., 11°26.7'E.).
6. Edshultshall (58°06.5'N., 11°28.0'E.).
7. Mollosund (58°04'N., 11°28'E.).
8. Bjorholmen (58°03.0'N., 11°31.4'E.).
9. Angevikens (58°02.0'N., 11°30.4'E.).
10. Astol (57°55.5'N., 11°35.3'E.).
11. Stora Dyron (57°56'N., 11°37'E.).
12. Nordon (57°53.5'N., 11°41.4'E.).
13. Almosund (58°04'N., 11°46'E.).

5.19 Ellos (58°11'N., 11°28'E.), a small industrial harbor and marina, is situated at the SE side of Ellosefjorden. It can be approached from NE via the North Channel, which is authorized for drafts up to 5m. The harbor can also be approached via the route leading from the vicinity of Hatten Light (see paragraph 5.14), which is authorized for drafts up to 7.5m.

The main berth is Traverskajen, which is 80m long and has depths of 5 to 6.5m alongside. Vessels may anchor, in depths of 16 to 18m, clay, about 0.4 mile W of the harbor.



By Henrik Norgaard [CC BY 3.0 (<https://creativecommons.org/licenses/by/3.0/>)], via Wikimedia Commons

Marstrandson Fort

Skarhamn (57°59'N., 11°33'E.), a small oil terminal and fishing harbor, is situated at the W side of Tjorn. An approach channel, indicated by a lighted range, leads from seaward in a NE direction for 2.5 miles through the off-lying dangers to the

harbor.

The oil basin provides four berths; the main berth is 135m long and has a depth of 6.2m alongside. The fishing basin provides five berths; the main berth is 130m long and has a depth of 4.5m alongside.

Angholmen (57°57'N., 11°34'E.), a small harbor, is situated at the NE side of a peninsula and serves a fishmeal factory. An approach channel, authorized for drafts up to 6m, leads from SW through the off-lying dangers. Local knowledge is required.

The harbor provides four main berths. The deepest berth is 55m long and has a depth of 5.5m alongside. The largest berth is 130m long and has depths of 3 to 5.5m alongside. Anchorage can be taken, in depths of 16 to 18m, clay, about 0.3 mile W of the harbor.

5.20 Marstrand (57°53'N., 11°37'E.) (World Port Index No. 24010), a commercial port and fishing harbor, is situated on the SE side of Marstrandsfjorden, 4.5 miles ENE of Hätteberget Light. The harbor is contained between the SW part of Koon Island, the N part of Klaveron Island, and the E part of Marstrandson Island. Entrance channels lead N and S of Marstrandson. A main pilot station is situated at the harbor.



Marstrand VTS and Pilot Positions

Ice.—The harbor only freezes during severe winters. Generally, the N entrance channel remains ice-free for longer than the S channel.

Depths—Limitations.—A secondary entrance channel leads N of Marstrandson and is authorized for drafts up to 4m.

The main entrance channel leads S of Marstrandson and is authorized for drafts up to 7m as far as the anchorage.

The commercial facilities are situated at the E side of Marstrandson. The main berth is 150m long and has depths of 3 to 4m alongside.

A disused shipyard is situated within the harbor. It has a main berth, 153m long, with depths of 4.1 to 4.8m alongside. There are also extensive facilities for small craft, fishing vessels, and pleasure boats.

Aspect.—A conspicuous fort, with a round tower, stands on the E part of Marstrandson.

Pilotage.—Pilotage is compulsory for the following:

1. Brofjorden Approach to Marstrand, Marstrand to Uddevalla, Marstrand to Lysekil (via Kyrkesund), Hattelverget to Marstrand. (see paragraph 5.1 for definitions of vessel categories):

- a. All Category 1 vessels.
- b. Category 2 vessels of 80m in length or 15m beam and over.
- c. Category 3 vessels of 90m in length or 16m beam and over.

2. Marstrand to Goteborg and Trubaduren (via Skargarden):

- a. All Category 1 vessels.
- b. Category 2 vessels of 70m length, 14m beam, and 4.5m draft and over.
- c. Category 3 vessels of 70m length, 14m beam, and 4.5m draft and over.

Pilots board about 2 miles SW of Hatteberget Light (57°50.5'N., 11°24.9'E).

Ordering of pilots should be carried out via the Swedish Vessel Reporting System (FRS) on the Swedish Maritime Administration internet web site (see paragraph 5.1). In exceptional cases, pilots (call sign: Marstrand Pilot) may be ordered by telephone or on VHF channel 10. A preliminary request for pilotage should be made at least 24 hours in advance. A definitive pilotage request must be made via the Pilot Request System at least 5 hours in advance.

Marstrand—Pilot Contact Information	
Pilots	
Call sign	Marstrand Pilot
VHF	VHF channel 10
Telephone	46-771-630-650
Facsimile	46-31-647-779
E-mail	westcoastpilot@sjofartsverket.se
Website	https://www.sjofartsverket.se

The station provides pilots for Marstrand, Stenungsund, Uddevalla, and Wallhamn.

Vessel Traffic Service.—A Vessel Traffic Service (VTS) op-

erates in the approaches to the coast in the vicinity of Marstrand.

The VTS area limits are indicated by a line joining the following positions:

1. Skarhamn (57°59.6'N., 11°32.5'E.).
2. Hyppeln (57°45.8'N., 11°36.3'E.).
3. An arc, with a radius of 7 miles centered on Graberget Light to position 57°52.8'N., 11°35.0'E.
4. Valkommen/Hisingen (57°45.8'N., 11°46.7'E.).
5. Porsholmen (57°46.2'N., 11°47.2'E.).
6. Stockholmarna (58°47.8'N., 11°47.2'E.).
7. Runntangen (58°04.3'N., 11°45.0'E.).
8. South Askeron Island (58°04.9'N., 11°45'E.).
9. North Askeron Island (58°06.1'N., 11°45'E.).
10. Position 58°06.9'N., 11°45.0'E.

The VTS boundary acts as the reporting line for Marstrand VTS.

Marstrand VTS is controlled from Sodertalje.

The VTS system is mandatory for all vessels, as follows:

1. All vessels of 300 gt.
2. All vessels, including tows, of over 45m loa.
3. All vessels of 15m in length, 20 gt. and smaller registered fishing vessels should participate in the reporting system if their passage or activity will affect the safe transit of other vessels.

The Marstrand VTS Control provides information on traffic in the area and other navigational details, including ice conditions and passage limitations.

All vessels, while in the VTS area must maintain a continuous radio watch on VHF channels 10 and 16.

Vessels report to the VTS, as follows:

1. Before entering the VTS area and immediately prior to departure from a berth or anchorage:

ID	Information required
A	Vessel's name and call sign
C or D	Name of nearest reporting line or geographical position
L	Planned route
I	Destination
O	Actual draft

2. When passing the Reporting Points, listed in the table titled **VTS Reporting Positions**, as follows:

ID	Information required
A	Vessel's name and call sign
—	Reporting point
I	Destination

3. When deviating from the planned route:

ID	Information required
A	Vessel's name

ID	Information required
C or D	Position
L	New planned route
I	Destination

4. When arriving at an anchorage or berth:

ID	Information required
A	Vessel's name and call sign
C or D	Position

5. When damage has occurred to machinery, engine or navigational equipment which could affect the vessel's safe navigation and maneuverability.

ID	Information required
A	Vessel's name
C or D	Position
I	Destination
Q	The defect or damage causing the vessel to report

Vessels within the VTS area may be contacted, with warnings of safety situations regarding safe navigation.

Marstrand—VTS Contact Information	
VTS Control	
Call sign	VTS Marstrand
VHF	VHF channel 10
Telephone	46-771-630-650

Marstrand—VTS Contact Information	
Facsimile	46-31-647-779
E-mail	vtswc@sjofartsverket.se

Anchorage.—Anchorage is available, in depths of 10 to 12m, clay, close E of the SE extremity of Marstrandson.

Outer anchorage areas, with depths of approximately 20m, lie E of South Astol island and further E into the Algo fjorden.

Caution.—A line-driven ferry operates in the harbor between Koon Island and Marstrandson.

Several submarine cables and pipelines are situated within the harbor and may best be seen on the chart.

At times, numerous pleasure craft and sail boats may be encountered in the approaches to Marstrand.

5.21 Wallhamn (58°01'N., 11°42'E.) (World Port Index No. 24009), a small commercial port, is located on the SE side of Tjorn. It lies at the head of Svanvikskile, an inlet, which extends 2.5 mile N from Hakefjord in the S part of the South Channel. The port of Wallhamn is controlled from Sodertalje. The harbor has extensive facilities for the shipping of automobiles.

Wallhamn Home Page
http://www.wallhamn.com

Depths—Limitations.—The entrance channel, about 100m wide, leads N to the harbor and, along with the harbor basin, has a dredged depth of 11m. It is authorized for drafts up to 10m.

The main quays are located along the N side of the basin. There is a turning area in the S part of the basin.

The harbor has facilities for general cargo, bulk, container, ro-ro, and vehicle carrier vessels. Vessels up to 230m in length and with a maximum draft of 10m draft can be accommodated. For more berthing information see table titled **Wallhamn—Berth Information**.

Wallhamn—Berth Information					
Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
Wallhamn Terminal					
No. 2	220m	10.8m	230m	10m	PCC, breakbulk, and bunkers.
No. 3	80m	10.8m	—	10m	PCC, containers, and breakbulk.
No. 4	169m	8.5m	—	7.9m	Containers, PCC, cement, and breakbulk.
No. 5	239m	8.5-9.1m	—	7.9m	Containers, PCC, cement, and breakbulk.
No. 6	55m	—	110m	5.5m	—

Marstrand—VTS Reporting Positions			
ID	Name	Position	Remarks
I	Bredbaden	57°58.4'N, 11°27.7'E	Inbound only
J	W of Hatteberget	57°50.4'N, 11°22.7'E	Inbound only

Marstrand—VTS Reporting Positions			
ID	Name	Position	Remarks
K	Kallofjord	57°57.7'N, 11°39.0'E	Inbound only
L	Nordre alvasfjord	57°45.7'N, 11°43.4'E	Inbound only
2	Buskars Knot	57°58.0'N, 11°43.3'E	—
3	Halsefjord	58°06.9'N, 11°49.0'E	—
4	Strandanas	58°11.6'N, 11°51.1'E	—
7	Islandsber	58°11.7'N, 11°24.0'E	Eastbound

Aspect.—The entrance channel is marked by buoys and its limits are indicated by lighted ranges.

Pilotage.—Pilotage to Wallhamn is compulsory for the following vessels (see paragraph 5.1 for definitions of vessel categories):

1. All Category 1 vessels.
2. Category 2 vessels of 80m length or 15m beam and over.
3. Category 3 vessels of 90m length or 16m beam and over.

Generally, initial ordering of pilots should be carried out via the Swedish Vessel Reporting System (FRS) on the Swedish Maritime Administration internet web site (see paragraph 5.1). In exceptional cases, pilots (call sign: Marstrand Pilot) may be ordered by telephone or on VHF channel 10. A preliminary request for pilotage should be made at least 24 hours in advance. A definitive pilotage request must be made via the Pilot Request System at least 5 hours in advance.

Pilots board 2 miles SW of Hatteberget Light (57°50.5'N., 11°24.9'E.).

Contact Information.—See the table titled **Wallhamn—Contact Information**

Wallhamn—Contact Information	
Port	
Call sign	Wallhamn HamnRadio
	Wallhamn Harbor Radio
VHF	VHF channels 6, 9, 11, and 16

Wallhamn—Contact Information	
Telephone	46-304-679900
Facsimile	46-304-679955
E-mail	info@wallhamn.se
Web site	https://www.wallhamn.se

5.22 Stenungsund (58°04'N., 11°50'E.) (World Port Index No. 24000), fronted by the island of Stenungson, is a small industrial port located at the E side of Askerofjorden.

Depths—Limitations.—Commercial shipping is centered between five separate terminals, located on either side of the Havden peninsula. Vessels up to 72,837 dwt, 240m in length, 13m draft, and 40m beam can be accommodated.

The facilities on the N side of the peninsula fronting Askerofjorden are, Borealis Jetty on the N side of the peninsula closest to the tip and operated by Borealis AB. The Vattenfall Power Plant Jetty lies just 720m E of the Borealis Jetty. However, the power plant has not operated since 2015. The Petro-Port Terminal Jetty lies adjacent and to the N of the Vattenfall Power Plant Jetty.

The facilities on the S side of the peninsula are, The INOVYN Chemical Terminal lies on the S side of Troskeln island, and is connected to the Havden peninsula by a man-made tombolo. The berth was once referred to as Saltkajen. The NCC Ballast Terminal lies in the Stenungsundet, approximately 0.5 mile SE of the INOVYN Chemical Terminal; This berth is also referred to as the Talludden Wharf.

For more berthing information see the table titled **Stenungsund—Berth Information**.

Stenungsund—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
NCC Ballast Terminal							
Ballast Jetty	104m	—	100m	6.0m	13.3m	5,234 dwt	Breakbulk, others, soil, sand, gravel, aggregates, and bunkers.
INOVYN Stenungsund Plant							
INOVYN Jetty	135m	9.5m	175m	9.0m	25.0m	12,332 dwt	Chemical gases, chemicals, LPG, breakbulk, loading salt and chemicals, caustic soda, PVC, hydrochloric acid, multipurpose, and bunkers.

Stenungsund—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
Borealis AB- Stenungsund Production Plant							
Borealis Jetty	60m	14.3m	240m	13.0m	37.2m	65,000 dwt	Chemical gases, clean products, LPG, and bunkers. Berthing length of 135m (including dolphins).
PetroPort Terminal							
PetroPort Jetty N	88m	9.6m	150m	9.1m	22.6m	15,210 dwt	Chemical gas, chemicals, LPG, and vegetable oil. Berthing length of 132m (including dolphins).
PetroPort Jetty S	88m	10.8m	170m	10.3m	24.2m	23,503 dwt	Chemical gas, chemicals, LPG, and vegetable oil. Berthing length of 132m (including dolphins).
Vattenfall Power Plant							
Vattenfall N	105m	12.5m	240m	11.5m	40.0m	72,837 dwt	Chemical gases, chemicals, petroleum products, LPG, bunkers, and vegetable oil.
Vattenfall S	105m	11.2m	200m	10.2m	40.0m	26,416 dwt	Chemical gases, chemicals, petroleum products, LPG, and bunkers.

The S part of Stenungsundet is spanned by a bridge, which has a vertical clearance of 13m over a navigable width of 30m.

Aspect.—The approach channels leading to the berths are indicated by lighted ranges.

Pilotage.—Marstrand provide pilots for Stenungsund. Pilotage to Stenungsund is compulsory for the following vessels (see paragraph 5.1 for definitions of vessel categories):

1. All Category 1 vessels.
2. Category 2 vessels of 80m length or 15m beam and over.
3. Category 3 vessels of 90m length or 16m beam and over.

Generally, initial ordering of pilots should be carried out via the Swedish Vessel Reporting System (FRS) on the Swedish Maritime Administration internet web site:

Swedish Maritime Administration Home Page

<https://www.sjofartsverket.se/en>

A preliminary request for pilotage should be made at least 24 hours in advance. A definitive pilotage request must be made via the FRS Pilot Request System at least 5 hours in advance.

Stenungsund—Pilot Contact Information	
Pilots	
Call sign	Marstrand Pilot
VHF	VHF channel 10
Telephone	46-771-630-650
Facsimile	46-31-647-779

Stenungsund—Pilot Contact Information

E-mail	westcoastpilot@sjofartsverket.se
Web site	https://www.sjofartsverket.se

Pilots may be contacted by VHF and board near Hatteberget Light (57°50.5'N., 11°24.9'E.).

Regulations.—The approaches to the harbor lie within the Marstrand VTS area (see paragraph 5.20).

All tankers and gas tankers over 20,000 dwt, loaded or in ballast, must be escorted by a tug when proceeding between Skallen Light and any quay or the inner anchorage.

Contact Information.—The port of Stenungsund can be contacted by e-mail (kontoret@hamntjanst.se).

Anchorage.—Designated anchorage areas lie along the SW side of Askerofjorden, in depths of 11 to 17m, clay, good holding ground.

5.23 Uddevalla (58°21'N., 11°55'E.) (World Port Index No. 23990) is situated on the NE side of Byfjorden at the mouth of the Bavean River. It lies about 40 miles from the sea and serves an industrial area. The port can be approached via the North Channel or the South Channel, both of which are described in paragraph 5.17.

The harbor consists of several river berths and a deep-water commercial basin, which contains an oil complex.

Uddevalla Home Page

<http://www.uddevalla-hamn.se/en/1.html>

Winds—Weather.—The prevailing winds are from the W. Fog is frequent in winter. The least amount of fog usually oc-



Uddevalla—Sorvik Dock

curs in June and July but patches of fog may be found in the fjords at any time.

Ice.—Ice seldom obstructs the harbor. During severe winters, the port is kept open by icebreakers.

Tides—Currents.—The mean tidal range is 0.6m, but the water level in the approaches may be affected by the wind.

The current always sets outward from the harbor and, at times, may attain a rate of 3 knots in the narrow parts of the channel.

Depths—Limitations.—The port has facilities for general cargo, container, tanker, ro-ro, bulk, and timber vessels. There are also facilities for small craft and pleasure boats. Vessels up to 11.5m draft can be accommodated in the port. The maximum air draft which can be accommodated in the fairway is

43m. The principal berthing areas are Froland, Benders, Sorvik, Skeppsholmenspiren, Bado, and Bavean.

When proceeding from the Sunninge sound under the Uddevalla Bridge (depth of 13m in the channel) and into the Byfjorden, the Froland Bulk Ore Quay, is situated to the N. The quay is 240m long and has a depth of 11.7m alongside. A ro-ro ramp lies off the SW corner of this quay.

Benders harbor is situated less than 1 mile NE of Froland, tucked behind St. Karra Holme Island, and has a depth of 9.3m alongside.

Sorvik harbor lies just to the E of Benders. The basin, with a depth of 10.3m, is a remnant of a former shipyard and is fronted by the Sorvik Dock on the W and Sorvik Oil Terminal wharf on the E.

Uddevalla—Berth Information					
Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
Dry Cargo Terminal					
No. 30	60m	8.5m	118.1m	8.0m	Breakbulk and bunkers.
No. 31	77m	8.5m	157.2m	8.0m	Breakbulk and bunkers. Continuous berthing length of 385m.
No. 32	77m	8.5m	126.1m	8.0m	
No. 33	77m	8.5m	99.9m	8.0m	
No. 34	77m	7.6m	123.6m	7.1m	
No. 35	77m	7.6m	—	7.1m	
Skeppsholmspiren					
FL	7m	7.4m	78.5m	6.4m	Ro/pax, ro-ro/lo-lo, breakbulk, and bunkers. Berthing length of 75m (including dolphin).
No. 49	59m	11.2m	185.7m	10.7m	Cement, reefer, breakbulk, and bunkers. Continuous berthing length of 175m.
No. 50	58m	11.2m	154.7m	10.7m	
No. 51	58m	11.2m	185.7m	10.7m	

Uddevalla—Berth Information					
Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
No. 52	6m	11.2m	143.9m	10.7m	Cement, breakbulk, and bunkers. Berthing length of 80m (including dolphins).
No. 53	6m	11.2m	119.1m	10.7m	Cement, breakbulk, and bunkers. Berthing length of 90m (including dolphins).
Sorvik					
D1	137m	10.0m	108.5m	8.3m	Ro-ro/lo-lo, breakbulk, bunkers, and reefer. Continuous berthing length of 410m.
D2	136m	10.0m	158.1m	8.3m	
D3	136m	10.0m	149.9m	8.3m	
D4	137m	10.0m	126.5m	8.3m	Breakbulk, bunkers, and reefer. Continuous berthing length of 410m.
D5	136m	10.0m	189.9m	8.3m	
D6	136m	10.0m	—	8.3m	
D7	99m	10.0m	126.1m	8.3m	Breakbulk and bunkers.
K4	40m	7.0m	—	6.5m	Breakbulk and bunkers. Berthing length of 110m (including dolphins).
No. 71	83m	11.0m	199.8m	10.5m	Containers, general cargo, breakbulk, bunkers, and reefer. Continuous berthing length of 250m.
No. 72	83m	11.0m	204.3m	10.5m	
No. 73	84m	11.0m	188.6m	10.5m	
Froland					
No. 60	7m	7.8m	125.2m	7.3m	Chemicals, clean products, and bunkers. Berthing length of 57m (including dolphins).
No. 61	79m	12.0m	118.4m	11.5m	Breakbulk, general cargo, and bunkers. Continuous berthing length of 236m.
No. 62	79m	12.0m	145.6m	11.5m	Breakbulk, general cargo, and bunkers. Continuous berthing length of 37m.
No. 63	79m	12.0m	130.2m	11.5m	
Mobil Oil Terminal					
Oil	30m	7.4m	100m	6.9m	Chemicals, clean products, and bunkers.

Skeppsholmenspiren lies just E of Sorvik, and forms the eastern edge of Kasebukten harbor. There is a ro-ro berth on the SE side.

Bado, a small basin, is located close to the N side of the river mouth and directly E of Skeppsholmenspiren. For more berthing information see the table titled **Uddevalla—Berth Information**.

Due E of Bado is the Bavean riverfront area, which has a number of berths. The area is closed to commercial traffic; port officials can be contacted for more information.

Pilotage.—Pilotage to Uddevalla is described with the approaches (see paragraph 5.16).

Regulations.—The approaches to the harbor lie within the Marstarnd VTS area (see paragraph 5.20).

Contact Information.—See the table titled **Uddevalla—Contact Information**.

Anchorage.—Vessels can obtain anchorage, in a depth of 40m, mud, within the outer part of Gustavsbergbukten, a bay, which lies in the SE part of Byfjorden. They must remain clear

of Lillon, an above-water rock fringed by a reef, which lies near the middle of the bay.


Uddevalla—Contact Information	
Port	
Call sign	Uddevalla hamnradio/Uddevalla Harbor Radio
VHF	VHF channels 11, 14, and 16
Operations	
Telephone	46-522-91300
E-mail	port@uddevall-hamn.se
Port Authority	
Telephone	46-522-91200
E-mail	info@uddevalla-hamn.se

Uddevalla—Contact Information

Web site	http://www.uddevalla-hamn.se
----------	---

Caution.—The Sotenas Wave Energy Park, a rectangular area with dimensions of 1,200m by 800m, is designated for

measuring wave energy. It has been established in approximate position (58°23'N., 11°08'E.), NW of Kungshamn. This area is marked by a special lighted buoy, equipped with AIS, at each corner. The sea bed will contain cables, converters, and 4 ton yellow buoys connected to generators by a wire within this area.

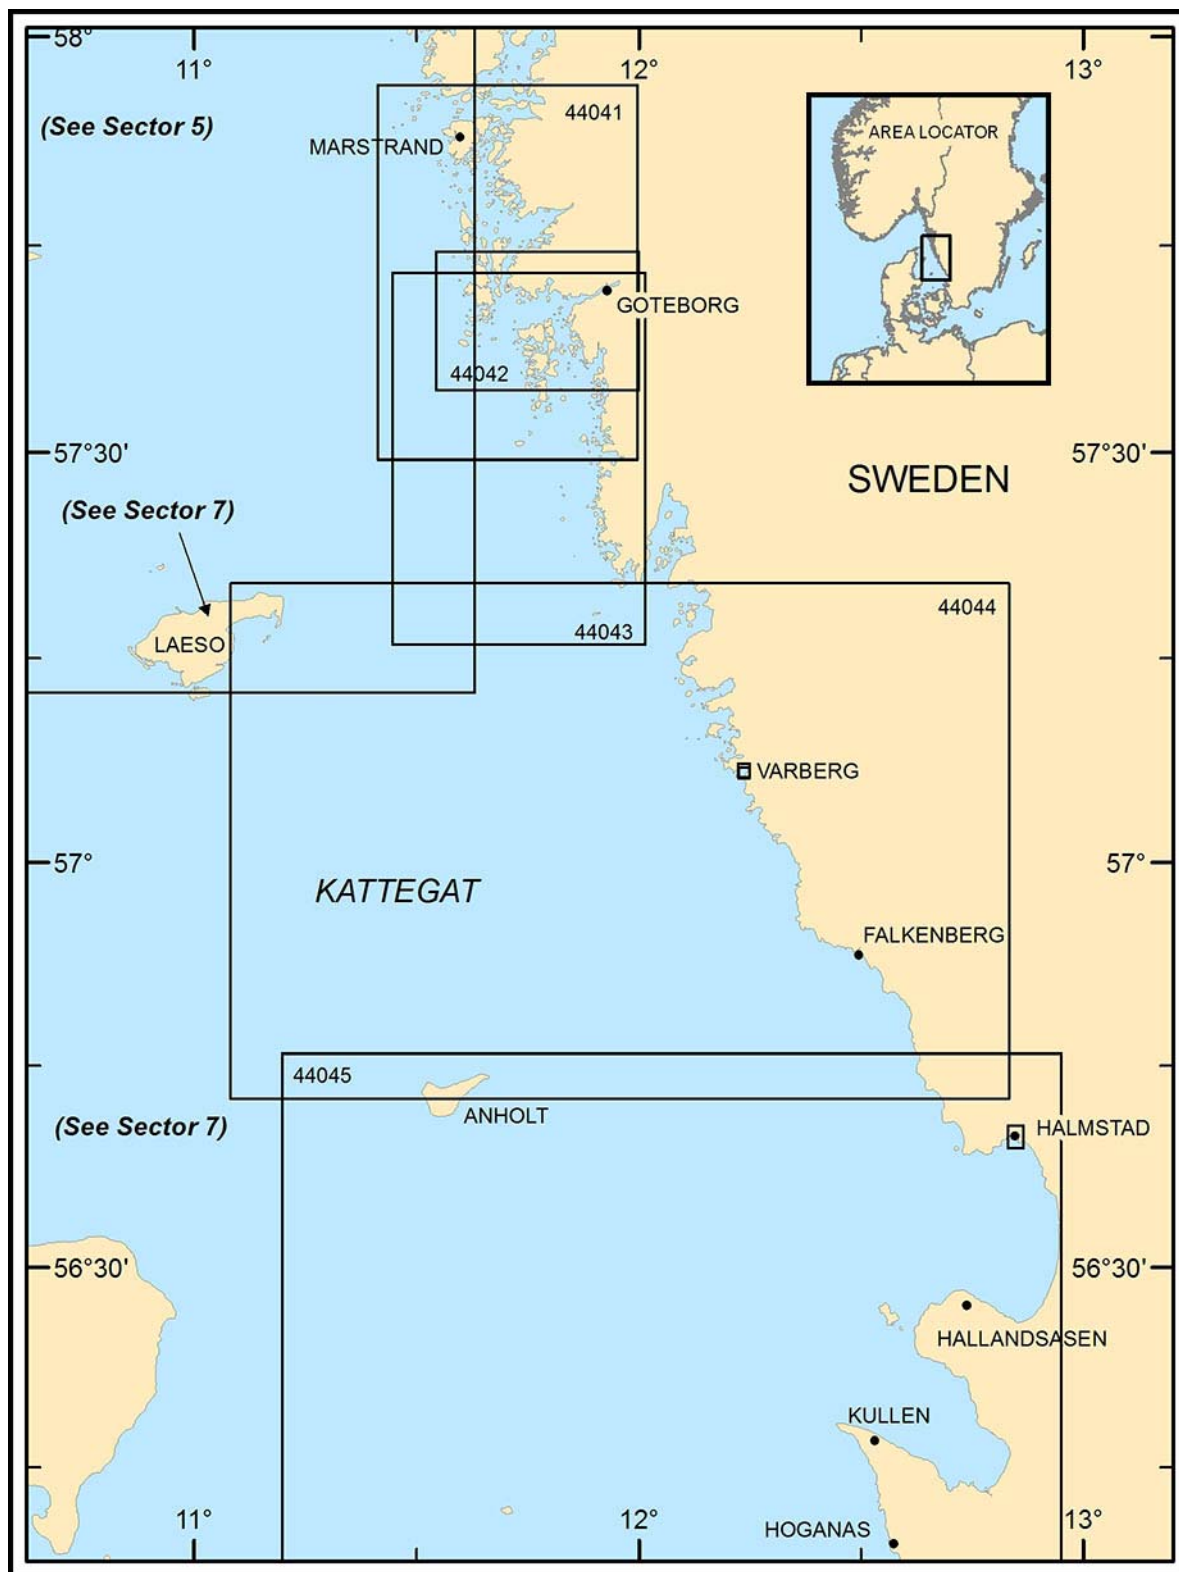

Additional chart coverage may be found in NGA/DLIS Catalog of Maps, Charts, and Related Products (Unlimited Distribution).

SECTOR 6 — CHART INFORMATION

SECTOR 6

SWEDEN—WEST COAST—MARSTRANDSFJORDEN TO KULLEN

Plan.—This sector describes the W coast of Sweden from Marstrandsfjorden to the W extremity of Kullen, a conspicuous promontory located about 97 miles SSE.

General Remarks

6.1 The N part of the coast described in this sector is very irregular and is fronted by numerous islands, islets, rocks, and shoals. The shore is indented by a number of bays and fjords. The S part is generally low, with some inland hills, and is fringed by a number of shoals. The major ports located along the coast include Goteborg, Varberg, Falkenberg, and Halmstad.

Ice.—Ice normally forms in the inner leads, fjords, and several harbors located within the area described in this sector.

Pilotage.—Generally, pilotage is compulsory along certain fairways connecting ports along the coast in Swedish waters. Vessels subject to compulsory pilotage vary in size and type according to location.

For further details, see paragraph 5.1 and Pub. 140, *Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas*.

Regulations.—Commercial vessels in Swedish territorial waters, when in the company of Swedish warships in daylight or when within 1 mile of any restricted or semi-restricted areas, are required to hoist their national flag. When at anchor in the company of Swedish warships, the national flag shall be hauled down.

Special regulations are in force with regard to the presence of aliens and foreign vessels within certain restricted and semi-restricted areas fronting the coast. Generally, foreign ships may, without permission, make use of the main channels, shipping lanes, and fairways within the restricted and semi-restricted areas. Foreign ships may also, without permission, remain within these areas for a maximum of 72 hours successively at an anchorage or mooring. For further details, see Pub. 140, *Sailing Directions (Planning Guide) for the North Atlantic Ocean and Adjacent Seas*.

Directions.—From a position located about 4 miles SW of Hatteberget Light (57°52'N., 11°28'E.), the coastal route leads SSE, passing WSW of Vinga Light (57°38'N., 11°36'E.), to a position located about 3 miles WSW of Trubaduren Light (57°36'N., 11°38'E.). It then continues SSE, passing SW of Tistlarna Light (57°31'N., 11°44'E.), to a position located about 4 miles WSW of Hallands Svartskar Light (57°22'N., 11°51'E.).

From the vicinity of Hallands Svartskar Light, the route leads SSE to a position located 2.5 miles N of Fladen Light (57°13'N., 11°50'E.). It passes clear of the approaches to Kungsbackafjorden and Vendelsofjorden. The route then leads SE and passes about 1.5 miles NE of Fladon Light. It continues SSE and parallel to the coast to a position located 7 miles WSW of Varberg.

From the vicinity of Varberg, the route leads SSE, passing

ENE of Morups Bank (56°52'N., 12°13'E.), to a position located about 6.5 miles WSW of Falkenberg. It then continues SE, passing clear of the shore bank and two shallow wrecks, to a position located 4 miles WSW of Tylogrund Light (56°38'N., 12°42'E.). From this position, vessels may steer E into the approaches to Halmstad or in a SW direction to the junction of Route B and Route D (see paragraph 7.8).

An inner passage route, which is narrow in places, leads inside the many islands and islets fronting the mainland coast. Generally, the channels are authorized for small vessels with drafts up to about 4.5m. This inner passage is used only by small vessels with local knowledge.

An inshore route, which is intricate and very narrow, leads through the many dangers fronting the mainland coast. It is used only by small craft, fishing vessels, and pleasure boats. The channels are authorized for drafts up to about 3m and local knowledge is required.

Caution.—Due to the residual danger of the possible existence of bottom mines laid during WWII, vessels are cautioned against anchoring or fishing within several former NEMEDRI mine danger areas, which are located along the coast. For further information, see Pub. 140, *Sailing Directions (Planning Guide) for the North Atlantic Ocean and Adjacent Seas*.

Several submarine power cables, which may best be seen on the chart, extend between this section of the Swedish coast and Denmark. Magnetic compasses may be affected in the vicinity of these cables.

Marstrandsfjorden to Goteborg

6.2 Hatteberget Light (57°52'N., 11°28'E.) is situated in the approaches to Marstrandsfjorden (see paragraph 5.17). The coast extending between this light and Vinga Light (57°38'N., 11°36'E.) has few natural landmarks. It is fronted by numerous islands, islets, rocks, and shoals which may best be seen on the chart.

Stora Polsan Light (57°46.5'N., 11°31.3'E.) is shown from a prominent tower, 10m high, standing on the summit of a dark rock lying 5.7 miles SSE of Hatteberget Light. Lilla Polsan, another dark rock lies 0.5 mile NE of the light and a shallow reef extends between them. Detached shoals, with a least depth of 5.4m, lie about 0.4 mile E and 1 mile NE of the light.

Lekskar Light (57°50.5'N., 11°35.4'E.) is shown from a structure standing on an islet lying 4.5 miles ESE of Hatteberget Light. A conspicuous beacon is situated close E of the light.

Sor Krakkan, a detached shoal with an above-water rock, lies about 2.4 miles WNW of Lekskar Light and is marked by a beacon.

Dorjeskar, a group of small islets, lies on a shoal bank, 2 miles SW of Lekskar Light. The bank, which has depths of 2 to 5m, extends about 0.6 mile N and 0.7 mile SSE from the group.

Stora Rossen, an islet, lies 2 miles NE of Stora Polan Light and a conspicuous beacon stands near its SE end. Raven, a prominent light-colored islet, lies 0.6 mile NW of Stora Rossen



Stora Polsan Light

and has a large boulder standing on its NW side. A shoal bank, with a least depth of 1.5m, extends between these two islets. A detached shoal patch, with a depth of 1.9m, lies about 0.7 mile SSE of Stora Rossen.

The above islets and shoals form the outermost dangers in the area lying between Hatteberget Light and Stora Polan Light.

Salo Fjord, forming part of the inner passage, lies 2.5 miles SSE of Lekskar Light. A channel, which passes close N of Raven, leads in an E direction from seaward to this fjord.

6.3 Roro (57°47'N., 11°36'E.), a light-colored island, lies 2.7 miles E of Stora Polsan Light at the N end of an extensive group of islands. A prominent framework tower, 17m high, stands in its S part. A rocky reef, with depths of less than 5m, extends about 0.8 mile NNW from the end of this island.

Hyppeln (57°46'N., 11°36'E.), a light-colored island, lies close S of Roro and is surrounded by a shallow shoal bank. This island is 44m high and a prominent cairn is situated on its summit.

Stora Oset Light (57°45'N., 11°36'E.) is shown from a structure standing on the summit of a small islet lying 3.2 miles ESE of Stora Polsan Light. Buro, a small island, lies 0.8 mile E of the light and stands out due to a conspicuous white mark on its W side.

Torrbeskar, an islet, lies on a shallow shoal bank centered about 1 mile WSW of Stora Oset Light. It is marked by a beacon which is reported to be difficult to distinguish from seaward. A detached shoal bank, with a least depth of 11m, lies about 2.5 miles W of Stora Oset Light. These are the outermost dangers in this vicinity.

Kallo Fjord lies 1 mile E of the N end of Hyppeln. It can be approached by a route leading between the S end of Hyppeln and Buro. The channel has a least depth of 6m and vessels may pass N or S of Torrbeskar and Stora Oset Light. Local knowledge is required.

6.4 Ockero (57°43'N., 11°39'E.), one of the larger islands fronting the coast, lies 2 miles SSE of Stora Oset Light. A conspicuous stone church, with a high dark spire, stands on the S part of this island.

Bjorko (57°44'N., 11°41'E.), a narrow island about 3 miles

long, lies with its S end located 1 mile E of Hono.

Hono (57°41'N., 11°39'E.), one of the larger islands fronting the coast, lies close S of Ockero and is connected to it by a low bridge. A conspicuous white church, with a high copper spire, stands near the center of this island and a prominent water tower is situated 0.3 mile S of it. A prominent wind generator is situated on the NE extremity of the island; a conspicuous radio mast, 55m high, stands about 0.5 mile WSW of it. The Fotobron Bridge (57°40.6'N., 11°39.8'E.) crosses the fairway between the S tip of Hono and Soo. It has a width of 49.6m and a vertical clearance of 13.4m.

Hono Huvud Light (57°41.4'N., 11°36.4'E.) is shown from a structure standing on an islet lying on an area of foul ground about 0.3 mile SSW of the W extremity of Hono.

Benskar Light (57°39.9'N., 11°36.8'E.) is shown from a structure standing on the S end of an islet lying on an area of foul ground about 1.5 miles S of Hono Huvud Light.

Vinga Light (57°38'N., 11°36'E.) is shown from a prominent stone tower, 29m high, standing on the summit of an island of the same name lying about 1.8 miles S of Benskar Light. A red pyramid-shaped daybeacon, surmounted by a sphere, is situated close SW of the light. Two radar towers also stand close by. Vinga Island, which is 21m high and irregularly shaped. Rocks and shoals, with depths of less than 10m, lie up to about 0.8 mile SSE and 1.4 miles SE of Vinga. A submarine cable lies SE of Vinga Light.



Vinga Light, day beacon, and radar tower

Vinga Ungar Light (57°38.2'N., 11°35.5'E.) is shown from a structure standing on a group of rocks, partly above-water, about 0.4 mile NW of Vinga Light.

Viten Light (57°38.1'N., 11°37.3'E.) is shown from a structure, 9m high, standing on a detached shoal lying about 0.7 mile ENE of Vinga Light. Vinga West Approach Lighted Buoy is moored about 1.7 miles WNW of Vinga Light.

An extensive group of islands, islets, rocks, and shoals extends between the S side of Hono and Vinga, about 3.2 miles SSW, and may best be seen on the chart. The larger islands in the group are separated from each other by narrow passages.

Bolleskaren, a group of above-water rocks standing on an area of foul ground, lies centered 1.6 miles W of the S part of Ockero.

A detached shoal patch, with a depth of 9.2m, lies about 0.8



Vinga Island from W over Buskars Island

mile WSW of Hono Huvud Light. Detached shoal patches, with a depth of 8.5m, lie about 1.1 miles NW and 0.8 mile WNW of Benskar Light.

6.5 Utliggarn (57°38.2'N., 11°34.3'E.), a detached shoal bank, lies 0.7 mile W of Vinga Ungar Light. It has a least depth of 9.3m and is marked by a buoy moored at the W side.

The above rocks and shoals form the outermost dangers lying between Ockero and Vinga Light.

A number of small harbors and marinas are situated along the coast between Hatteberget Light and Vinga Light and within the groups of islands fronting the shore. These harbors have no commercial significance and are used only by small craft, local ferries, fishing vessels, and pleasure craft. The main harbors include the following:

1. Hono Rod (57°42'N., 11°38'E.).
2. Hono Klava (57°41'N., 11°39'E.).
3. Roro (57°46'N., 11°37'E.).
4. Hyppeln (57°45'N., 11°37'E.).
5. Kallo-Knippla (57°45'N., 11°39'E.).
6. Bjorko (57°44'N., 11°40'E.).
7. Halso (57°44'N., 11°40'E.).
8. Ockero (57 42'N., 11°40'E.).
9. Kalvsund (57°42'N., 11°41'E.).

10. Stora Kalvsund (57°43'N., 11°40'E.).

Approaches to Goteborg

6.6 The principal approaches to Goteborg lie NE of a line extending between Vinga Light and Tistlarna Light (57°30.6'N., 11°43.5'E.), 8.5 miles SSE.

Buskars Knot Light (57°38.3'N., 11°41.0'E.), equipped with a racon, is shown from a prominent floodlit tower, 12m high, standing at the E end of a group of rocks and foul ground lying 2.7 miles ENE of Vinga Light. It is situated at the SE side of the dangers extending S from the S side of Hono.

Ekeskarsbaden, a detached shoal patch, lies about 1.6 miles SW of Buskars Knot Light. It has a least depth of 7.6m and is marked close E by a lighted buoy.

Brede Bade, a shoal with a least depth of 2.6m, and Svarteskarsbaden, a shoal with a least depth of 2.7m, lie about 0.5 mile and 0.9 mile, respectively, SW of Buskars Knot Light.

Varngrund, a detached shoal patch, lies about 1.7 miles SSE of Buskars Knot Light. It has a least depth of 8m and is marked close W by a buoy.

- 6.7 Trubaduren Light** (57°35.7'N., 11°37.9'E.), which is

equipped with a racon, is shown from a prominent floodlit tower surmounted by a helicopter platform, 25m high, standing on a detached shoal lying 2.4 miles SSE of Vinga Light.

Gamla Gumma, a detached shoal patch, lies about 0.7 mile N of Trubaduren Light. It has a least depth of 9.4m and is marked close S by a lighted buoy.

Sankberget, a shoal bank, lies about 1.4 miles ENE of Trubaduren Light. It has a least depth of 11m and is marked close NW by a lighted buoy.

Caution.—A limited restricted area where anchoring, fishing, and diving are prohibited is located SW of Trubaduren Light.

Donso Svartskar Light ($57^{\circ}35.2'N.$, $11^{\circ}43.3'E.$) is shown from a structure standing on the NW side of Svartskar, an islet lying 2.9 miles ESE of Trubaduren Light.

Skrapan, a detached shoal bank with a least depth of 8.8m, lies about 0.7 miles SW of Donso Svartskar Light.

Tormund, a shoal bank with above-water rocks, lies centered about 1.7 miles SSW of Donso Svartskar Light.

Hastbaden, an above-water rock, lies on a shoal bank 1.1 miles NNW of Donso Svartskar Light and is marked by a prominent beacon.

6.8 Tistlarna Light ($57^{\circ}30.6'N.$, $11^{\circ}43.5'E.$) is shown from a prominent building standing on the SW part of an islet lying on an area of foul ground, 4.6 miles S of Donso Svartskar Light.

Matskar, a small islet, lies at the E side of the foul ground area, 0.6 mile E of Tistlarna Light, and is marked by a light. Detached shoal patches, with depth of less than 10m, lie up to about 2.6 miles SE of this islet and may best be seen on the chart.



Tistlarna Light



Botto Light and Disused Lighthouse

Yttre Viten, a rock awash, lies about 1.9 miles SSE of Matskar Beacon. It is situated at the E side of an area of shoals with a least depth of 2.7m. This foul area, which forms the outermost danger in this vicinity, is marked by a buoy moored at its SE side.

Vanguards Grund, a detached rocky shoal bank, lies about 2 miles NW of Tistlarna Light. It has a least depth of 5.4m and is marked close W by a lighted buoy. This shoal forms the outermost danger in this vicinity.

An extensive chain of islands, islets, rocks, foul ground, and a marine farm, which may best be seen on the chart, front the mainland coast in the approach to Goteborg and lies mainly E of a line extending N from Tistlarna Light.

6.9 Vasskarsgrund Light ($57^{\circ}39.2'N.$, $11^{\circ}43.3'E.$), equipped with a racon, is shown from a floodlit tower, 6m high, standing 1.5 miles NE of Buskars Knot Light.

Trinda Brunskar Racon ($57^{\circ}38'N.$, $11^{\circ}43'E.$) is situated on a small islet lying 1 mile S of Vasskarsgrund Light.

Fjarskaven, a detached shoal patch, lies about 0.6 mile SSW of Trinda Brunskar Racon. It has a least depth of 3.5m and is marked by a buoy.

Botto Light ($57^{\circ}39'N.$, $11^{\circ}43'E.$) is shown from a tower, 10m high, standing on a rock, which lies at the S side of the entrance to South Channel, 0.3 mile S of Vasskarsgrund Light. A prominent former lighthouse building is situated close to it.

Brandnasbrotten ($57^{\circ}39.1'N.$, $11^{\circ}44.2'E.$), a rock, lies on the outer edge of the S shore bank, about 0.6 mile ENE of Botto. A prominent disused light structure stands on this rock.

A prominent radar mast, 12m high, stands on the NW end of Galtero, about 0.4 mile SW of Vasskarsgrund Light.

Gaveskar Light ($57^{\circ}39.7'N.$, $11^{\circ}46.1'E.$) is shown from a floodlit tower, 10m high, standing on a rock of the same name lying about 1.6 miles ENE of Vasskarsgrund Light.

6.10 Mavholmsbaden Racon ($57^{\circ}40.4'N.$, $11^{\circ}42.4'E.$) is situated at a disused light tower, 8m high and floodlit, standing on a rocky shoal lying about 1.2 miles NNW of Vasskarsgrund Light.

An extensive shoal area, with several islets and rocks, lies in the approach to Goteborg between Mavholmsbaden Racon and Vasskarsgrund Light. This shoal area extends about 2.3 miles E and may best be seen on the chart.



Gaveskar Light

Stora Varholmen Light (57°41.7'N., 11°42.0'E.) is shown from a structure standing on the SW side of an island lying about 1.4 miles N of Mavholmsbaden Racon.

A number of small harbors and marinas are situated along the coast between Stora Varholmen Light and Tistlarna Light (57°30.6'N., 11°43.5'E.) and within the groups of islands fronting the shore. These harbors have no commercial significance and are used only by small craft, local ferries, fishing vessels, and pleasure craft. The main harbors include the following:

1. Vrangö (57°34'N., 11°47'E.).
2. Donso (57°36'N., 11°48'E.).
3. Stytsö Sandvikshammen (57°37'N., 11°46'E.).
4. Onnered (57°38'N., 11°52'E.).
5. Fiskeback (57°38.8'N., 11°51.4'E.).
6. Salttholmen (57°39.5'N., 11°50.5'E.).
7. Soo (57°40.5'N., 11°39.9'E.).
8. Foto (57°40'N., 11°39'E.).

Aspect.—The main approach fairway is marked by lighted buoys and indicated by directional sector lights.

Brudaremassen Tower (57°42'N., 12°05'E.), 320m high, stands 4 miles E of Goteborg and is the most conspicuous landmark along this stretch of coast.

Biskopsgården Chimney (57°43.3'N., 11°53.0'E.) stands at an elevation of 140m, about 2 miles NNW of the suspension bridge at Goteborg, and is conspicuous from seaward. It displays an aeronautical light. A prominent water tower is situated close NE of this chimney.

Slattadamm Radio Mast (57°44.1'N., 11°55.4'E.) stands at an elevation of 139m, about 2.8 miles NNE of the suspension bridge at Goteborg, and is conspicuous from seaward.

Torslanda Aeronautical Light (57°43.6'N., 11°48.4'E.) is shown at an elevation of 49m, about 4 miles NW of the suspension bridge at Goteborg.

Stora Ros (57°36.5'N., 11°47.1'E.), a conspicuous cairn, stands on the summit of a steep hill rising on Styrso Island, 2.4 miles NE of Donso Svartskar Light.

Stora Kansö Tower (57°37'N., 11°44.9'E.), 10m high, stands about 1.8 miles SSE of Vasskarsgrund Light and is prominent.

Two prominent radio masts stand, at an elevation of 137m, about 2.8 miles SSE of the suspension bridge at Goteborg.

Anchorage.—Three designated anchorage areas, the limits

of which may best be seen on the chart, lie in the outer approaches, as follows:

1. Area A, used by VLCCs, lies centered 2.5 miles SW of Trubaduren Light and has depths of 40 to 65m.
2. Area B lies centered 2.5 miles SSE of Trubaduren Light and has depths of 21 to 44m.
3. Area C lies centered 1.5 miles E of Trubaduren Light and has depths of 22 to 32m.

Directions.—The principal deep-water approach route to Goteborg, which may best be seen on the chart, leads in a NNE direction for about 5 miles to the vicinity of Buskars Knote Light (57°38.3'N., 11°41.0'E.) from a position located 2 miles S of Trubaduren Light. It then leads through Vinga Sand (57°39'N., 11°42'E.), Dana Fjord (57°40'N., 11°42'E.), and Hake Fjord (57°40.5'N., 11°44.5'E.).

From the vicinity of Buskars Knote Light, the track leads in a N direction and enters North Channel, a fairway marked by lighted beacons, at a position located about 0.8 mile SW of Mavholmsbaden Racon (57°40.4'N., 11°42.4'E.). This fairway channel, with a dredged depth of 20.5m, leads NE through Dana Fjord and rounds Mavholmsbaden Racon. It then continues in an E direction through Hake Fjord to the harbor facilities.

This principal approach route is authorized for drafts up to 18.9m as far as Torshammen Oil Terminal.

An alternate main entrance route, South Channel, leads in an ENE direction for 2.5 miles to the vicinity of Gaveskar Light (57°39.1'N., 11°46.1'E.) from NE of Buskars Knote Light. It passes between Botto and Vasskarsgrund Light. From close SSE of Gaveskar Light, the route then continues NE for 2 miles and passes through Rivo Fjord (57°40'N., 11°47'E.). It then joins the principal deep-water route close SW of Knippelholmen.

This alternate main approach route, which is slightly shorter than the deep-water route, is authorized for drafts up to 10m. It is reported that South Channel is being dredged to allow authorized drafts of up to 13m.

A secondary approach route from seaward, which is known as Vingaleden, leads into Vinga Sand (57°39'N., 11°42'E.). From the vicinity of Vinga West Approach Lighted Buoy (57°39'N., 11°33'E.), the route leads ESE for 2 miles, passing NNE of Utliggarn Shoal, Vinga Ungar Light, and Vinga Light. It then leads in an ENE direction for 3 miles and joins the entrance routes in Vinga Sand. The primary track passes close N of Viten Light and about 0.4 mile N of Buskars Knote Light. This route is authorized for drafts up to 8.5m by day and up to 6.5m at night.

An inner passage route leads to Goteborg through the islands and islets lying in the N approaches. It passes through Stora Sillesund (57°51.4'N., 11°33.2'E.), Salo Fjord (57°48.9'N., 11°37.7'E.), Kallo Fjord (57°46'N., 11°39'E.), and Stora Kalvsund (57°43'N., 11°40'E.) into the NW part of Dana Fjord. This route is authorized for drafts up to 4.5m. It is intricate and narrow in places. Local knowledge is required.

An inshore route leads through the islands and islets which lie in the N approaches. It leads from Algo Fjord (57°55'N., 11°40'E.) through Instö Ranna to a position located close E of Lango Island (57°51'N., 11°39'E.). From Lango Island, a channel leads SE to Nordre Alvs Fjord (57°46'N., 11°43'E.). It then passes E of Björko and continues S into Dana Fjord. An alternate channel leads S from the vicinity of Lango into Salo Fjord

and joins the inner passage. This inshore route is authorized for drafts up to 3.2m.

An inner passage route leads to Goteborg through the islands and islets lying in the S approaches. From a position located about 3.8 miles SE of Matskar Light, the route leads NNE and N for 12 miles. It passes E of Vrangö (57°34'N., 11°47'E.), E of Dono (57°36'N., 11°48'E.), and then joins the main approach route in Rivo Fjord. This route can also be approached from seaward. From a position located 3.6 miles SE of Matskar Beacon, the track leads N for 4 miles and NE for 0.8 mile. It passes about 0.6 mile E of Yttre Viten (57°29'N., 11°47'E.) and joins the inner route at a position located about 2.6 miles NE of Matskar Beacon. This inner passage route is authorized for drafts up to 7m. Local knowledge is required.

Caution.—A spoil ground area, which may best be seen on the chart, lies centered 2 miles WNW of Trubaduren Light.

A submarine cable, which may best be seen on the chart, extends in a N direction between Trubaduren Light and Vinga.

A restricted area, which may best be seen on the chart, lies centered 2.5 miles SE of Botto (57°39'N., 11°43'E.).

Restricted areas, within which fishing is prohibited, lie centered 1.2 miles NW and 1 mile SW of Buskars Knot Light and may best be seen on the chart.

Due to complicated tidal currents setting across the channel in Vingaleden, this approach route requires local knowledge (see Directions).

The direction of buoyage in the S approaches to Goteborg is N to S.

High speed ocean-going ferries may be encountered in the approaches to the port.

Defensive minefields, which are shown on the chart, are situated within the approaches, as follows:

1. In an area lying between the W side of Björko, the S end of Kallo, and the E side of Halsö (57°44'N., 11°39'E.).
2. In an area, 1.4 miles wide, extending about 3 miles N across the main approach channels from the vicinity of Trindd Brunskar Racon (57°38'N., 11°43'E.).
3. In an area lying between the NE end of Donso, the SE end of Kopstadso (57°37.5'N., 11°48.6'E.), the SW end of Stora Roso (57°38.2'N., 11°51.1'E.), and the W side of Langholmen (57°37.8'N., 11°51.7'E.).

Vessels are warned not to anchor in these areas and they should not pass through them during thunderstorms. If anchoring becomes essential due to an emergency, vessels should anchor as near to the outer limit of the mined area as possible.

It is reported that extensive dredging and changes to navigational aids are being carried out in the approaches to the port.

It should be noted that the new lights marking the edges of the dredged fairways in North Channel and South Channel are situated at the outer ends of arms extending horizontally from the permanent beacon structures.

Goteborg (Gothenburg) (57°42'N., 11°57'E.)

World Port Index No. 24020

6.11 Goteborg, an extensive commercial port, is situated at the mouth of the Gota River and serves a large industrial area. It is connected to the Baltic Sea by a series of canals and inland waterways. The old town, standing on the S bank of the



Goteborg—Arendal Ro-Ro Terminal

river, is connected to the new town by several bridges. The modern industrial town of Molndal stands 2 miles S of Goteborg.

Ice.—The port of Gotheburg and its approaches are kept open throughout the winter months by powerful icebreakers.

Under Swedish Maritime Administration Icebreakers Division operates a fleet of ten icebreakers deployed around the Swedish coast during the winter months, that maintains a 24-hour operation at the Center, in Gotheburg.

For further details, see Pub. 140, Sailing Directions (Planning Guide) for the North Atlantic Ocean and Adjacent Seas.

Port of Goteborg Home Page

<https://www.portofgothenburg.com>

Tides—Currents.—There is usually an outgoing current which attains a rate of 0.5 to 1 knot, depending upon meteorological conditions. Within the harbor, the current may attain a rate of 2 knots. The normal tidal range is about 0.2m.

The water level in the approaches ranges from about 1.2m above mean level to about 0.5m below it. Strong winds from SW to NW, especially in the fall and winter, raise the level while strong winds from SE to NE, especially in late winter and spring, lower the level.

Depths—Limitations.—The main commercial port facilities extend for about 8 miles. The specialized basins for tankers, container vessels, and ro-ro ferries are situated along the N side of the main fairway.

The main entrance fairway (North Channel) is dredged to a depth of 20.5m as far as Torshammen Oil Terminal and is authorized for drafts up to 18.9m (see Directions in paragraph 6.10). Between this oil terminal and Skarvikshammen, 2.7 miles E, the fairway is dredged to a depth of 14.2m. Between Skarvikshammen and Lindholmshammen, 2.3 miles E, the fairway is dredged to a depth of 8.4m. Between Lindholmshammen and Frihamnen, 0.5 mile NE, the fairway is dredged to a depth of 7.4m. Above Frihamnen, the fairway is dredged to a depth of 6.3m.

The harbor is spanned by four main bridges. The Alvsborgs



Goteborg

Bridge, the outermost, is a suspension bridge which spans the river 2.7 miles above Knippelholmen. It has a vertical clearance of 45m over a navigable passage, 100m wide, which is indicated by floodlit bluish-white marks painted on the bridge. The maximum air draft allowed is 43m.

The Hisingsbron Bridge lies just NE of the Alvsborgs Bridge (2022). This lifting bridge has a vertical clearance of 12m when closed and 28m when fully lifted. The horizontal clearance is 30m.

The Marieholms Bridge, a railroad bridge, spans the river 1.2 miles above where the Alvsborgs Bridge is located. It has a swinging span which provides a navigable passage, 15.5m wide, on each side of the center. Vessels proceeding upstream should use the passage on the E side and those proceeding downstream should use the passage on the W side.

Torshammen Oil Terminal (57°41'N., 11°48'E.) is located on the W side of Hjartholmen Island. The jetty, which handles crude oil, has two berths. The berth at the E side has a depth of 18m alongside; the berth at the W side has a depth of 19.6m alongside. Tankers up to 225,000 dwt, 351m in length, and 18.9m draft can be accommodated.

Svenska Shell Terminal is located at the E side of Hjartholmen. It provides two berths, with depths of 4.5 to 9.5m alongside.

Two quays, used for loading stone, are located at the W side

of Stora Risholmen, about 0.5 mile NNE of Torshammen Oil Terminal. The berths have depths of 6.5m alongside and can handle vessels up to 85m in length.

Arendal Ro-Ro Terminal, situated on the former site of a shipyard, is located 0.6 mile N of Knippelholmen. The quay at the N side of the basin is 400m long and the quay at the E side of the basin is 200m long. They have depths of 8.1m alongside.

Reclamation work is underway (2018) to fill the shallow lagoon lying just E of the Ro-Ro Quay and before Alvsborgshammen.

Skandiahammen, located E of Arendal Ro-Ro Terminal is divided into Alvsborgshammen, Skandia Terminal, and Tor Terminal.

Alvsborgshammen, a paper terminal, provides ten ro-ro berths, 130 to 265m long, with depths of 8.6 to 11m alongside. Vessels up to 160m in length can be handled.

Skandia Terminal provides a main container quay, 562m long, with a depth of 12m alongside. In addition, there are five ro-ro berths, 50 to 215m long, with depths of 6 to 12m alongside.

Tor Terminal provides four ro-ro berths, with depths of 8 to 10m alongside, and can handle vessels up to 145m in length.

Skarvikshammen, an oil and chemical terminal, is located close E of Skandia Terminal and about 0.7 mile W of the Alvsborgs Bridge. It provides 16 berths, with depth of 7 to 13m



The Alvsborg Bridge (Goteborg) with the Dalanas Pier and the Ryahammen Pier on the Left

alongside. Tankers up to 40,000 dwt and 280m in length can be handled.

Ryahammen, located close W of the Alvsborgs Bridge, is used by coastal tankers up to 25,000 dwt. It provides 15 berths, with depths of 4 to 9m alongside, and can handle vessels up to 180m in length.

Sannegardshammen, a general cargo terminal, is situated 1 mile NE of Alvsborgs Bridge. It provides ten berths, up to 540m long, with depths of 6.5 to 7m alongside.

Lindholmshammen, a vehicle terminal, is situated 1.5 miles NE of the Alvsborgs Bridge. It has ten berths, up to 300m long, with depths of 4.4 to 10m alongside.

Frihamnen, the free port, is located on the N side of the river opposite the City Center. It consists of four basins and is used by general cargo, cruise, and passenger ferry vessels. There are 19 berths with depths of 3 to 9m alongside.

Fiskehamnen, a fishing basin, is situated on the S side of the river, 1 mile E of the Alvsborgs Bridge. It has 900m of berthage with depths of 4 to 7m alongside.

Majnabbehammen, a quay with ro-ro ramps, is situated on the S side of the river, 0.6 mile E of the Alvsborgs Bridge. It provides four berths, 60 to 150m long, with depths of 3 to 8m alongside.

Stigbergskajen, a quay with ro-ro ramps, is situated close E of Fiskehamnen. It is about 500m long and has depths of 7 to 8m alongside.

Masthuggskajen, a quay with ro-ro ramps, extends E from Stigbergskajen. It is about 900m long and has depths of 6.5 to 7.6m alongside.

A ship-building yard (Eriksberg) is situated on the N side of

the river, 0.5 mile above the Alvsborgs Bridge. The dry dock is 332m long, 46m wide, and has a depth of 6.1m over the sill at MHWS.

Cityvarvet, the main repair yard, is situated 2 miles NE of the Alvsborgs Bridge. It has several fitting-out quays and a floating dock. The dock is 268m long, 34.7m wide, and can handle vessels up to 70,000 dwt.



Goteborg—Skarvik Oil Terminal

The **Trollhatte Kanal** in conjunction with the Gota Alv River connects Goteborg to the small port of Vanersborg (58°23'N., 12°20'E.) at the S end of Lake Vanern.

Depths—Limitations.—The route is 46 miles long and has



Goteborg—Skandia Terminal

six locks, each 89m in length, 13.4m wide, with a minimum depth of 5.6m. Generally, vessels up to 87m in length, 12.6m beam, 27m air draft, and 4.7m draft can transit the canal. With special permission, vessels up to 89m in length, 13.2m beam, and 5.4m draft can transit the canal.

The maximum allowance for barge and towage vessels are 35m in length, 3m in beam, and 3m in draft. The total length from the towing vessel's stern to the end of the towage is 60m.

Vanersborg provides quayside and can accommodate vessels with a maximum draft of 5.4m. For more berthing information see the table titled **Vanersborg—Berth Information**.

Vanersborg—Berth Information			
Berth	Length	Depth	Remarks
General Cargo Terminal			
Main	220m	6.0m	General cargo.
Other Berth			
Old port	155m	3.0m	—

The Gota Kanal, via Lake Vattern, extends from the E side of Lake Vanern to Mem (58°29'N., 16°25'E.), but is used only by small craft and pleasure boats.

Aspect.—The main entrance fairway is marked by lighted buoys and lighted beacons.

Five prominent wind generators, 30m high, stand between the N and S ends of Hjartholmen (57°41.2'N., 11°47.7'E.), an island lying on the N side of the main channel. Another five wind generators standing 30 feet high are situated on the small peninsula lying 0.3 mile E of Hjartholmen. On the E side of Hjartholmen, Svenska Shell Company has two berths with depths from 4.5 to 9.5m.

Knippelholmen (57°41'N., 11°49'E.), an islet, lies on the N side of the river, about 0.7 mile E of the S end of Hjartholmen. A prominent disused light tower, 6m high, stands on the SE end of this islet. An orange colored beacon stands on the SW end of the islet.

Nya Alvsborg Fort, a conspicuous fortress with a tower, stands on an island lying on the N side of the river, about 1.3

miles E of the S end of Hjartholmen.

Dynan, a detached rocky islet, lies on the S side of the main fairway, about 1.1 miles NE of Gaveskar Light. A prominent floodlit disused light tower stands on this islet.

The Alvsborgs Bridge, a high suspension bridge, spans the river 2 miles above Nya Alvsborg Fort and is conspicuous.

A conspicuous chimney, 110m high, stands on the S side of the river. A prominent water tower and a tower surmounted by a gilded crown are situated about 0.7 mile SW and 0.7 mile SSE, respectively, of this chimney.

For additional landmarks, see Approaches to Goteborg in paragraph 6.6.

Pilotage.—The Goteborg Pilotage Area lies in the approaches to the mainland between latitudes 57°16'N and 57°50'N. Pilotage within the area is compulsory (see paragraph 5.1 for definitions of vessel categories), as follows:

1. Trubaduren to Goteborg:
 - a. All Category 1 vessels.
 - b. Category 2 vessels of 100m length or 17m beam and over.
 - c. Category 3 vessels of 110m length or 19m beam and over.
2. Skandiahammen to Frihamnen:
 - a. All Category 1 vessels.
 - b. Category 2 vessels of 80m length, 15m beam, and 4.5m draft and over.
 - c. Category 3 vessels of 90m length, 16m beam, and 4.5m draft and over.
3. East of Frihamnen to Larjean river mouth:
 - a. All Category 1 vessels.
 - b. Category 2 and 3 vessels of 60m length, 19m beam, or 4m draft and over.
4. In the channels N of Vinga:
 - a. All Category 1 vessels.
 - b. Category 2 and 3 vessels of 70m length, 14m beam, or 4.5m draft and over.

Ordering of pilots should be carried out via the e-Services section on the Swedish Maritime Administration internet web site, and in addition, through the Swedish Vessel Reporting System (FRS), (see paragraph 5.1). Vessels can also order pilots by telephone or on VHF.

A preliminary request for pilotage should be made at least 24 hours in advance.

A definitive pilotage request must be made via the Pilot Request System at least 5 hours in advance.

Pilots will board in the following positions:

1. No. 1 (57°34.5'N., 11°38.8'E.), 1.2 miles SE of Trubaduren Light.
2. No. 2 (57°37.0'N., 11°31.9'E.), 2.5 miles WSW of Vinga Island.
3. No. 3 (57°38.8'N., 11°32.5'E.), 2 miles W of Vinga Approach Lighted Buoy.
4. VLCCs (57°38.5'N., 11°29.9'E.), W of Vinga
5. At position 57°40.2'N 11°47.6'E (Rivo Fjord).
6. Skandiahammen (57°41.2'N., 11°52.1'E.), S of Berth No. 520.

Goteborg Traffic Control Center (TCC) is located in position 57°41.6'N, 11°51.7'E.

Pilots for the Trollhatte Kanal and Lake Vanern change over in position 57°41.2'N, 11°52.1'E.

Pilot station accepts requests for Deep Sea Pilots for the North Sea, Kattegat and Skagerrak. Vessels should send requests 24 hours in advance.

Vessels should contract the pilot 1 hour prior to departure to confirm pilot boarding arrangements.

Regulations.—VLCCs berth and unberth in daylight only.

All tankers over 30,000 dwt, loaded or in ballast with no gas free tanks, are required to be escorted by a tug on entry and departure between Trubaduren Light (57°36'N., 11°38'E.) and any berth.

A vessel crossing the river shall give way to a ship proceeding up or down the river.

Speed limits are in force within the harbor.

Vessels lying at the quays or piers of the city may not make any sound signals on their whistles or move their engines at any time except immediately before their departure. One long blast may be sounded if it is necessary to test the engines.

Vessel Traffic Service.—A Vessel Traffic Service (VTS) system operates in the approaches to Goteborg and is controlled by the Traffic Control Center (TCC) at Klippan (57°41.6'N., 11°51.7'E.).

The Goteborg VTS area is delineated by the following:

1. On the W by the arc of a circle, radius 6 miles centered on Vinga Light (57°37.9'N., 11°36.1'E.).
2. On the S by the parallel of latitude 57°31.9'N.
3. On the N by the parallel of latitude 57°43.9'N.
4. On the E by the Gotaalvbron Bridge between position 57°42.9'N, 11°57.1'E and position 57°42.8'N, 11°58.1'E.

Participation in Goteborg VTS is mandatory for the following:

1. All vessels over 300 gt.
2. All vessels including tows over 45m loa.
3. All vessels of 20 gt. and over, or 15m loa that are registered, including small fishing vessels who shall participate in the reporting system if their action or course can affect the safe transit of other vessels.

All vessels must keep a continuous listening watch and con-

tact the Traffic Center, as follows:

1. When W of the Gotaalvbron (57°42.9'N., 11°58.0'E.) on VHF channel 13.

2. When to the E of this bridge, vessels must contact the Traffic Center on VHF channel 9.

Vessels are not permitted to depart from a berth or anchorage without obtaining permission from VTS.

Vessels must report, as follows:

1. Before entering the VTS area and immediately prior to departure from a berth or anchorage:

ID	Information Required
A	Vessel's name and call sign
C or D	Name of nearest reporting line or geographical position
L	Planned route
I	Destination
O	Actual draft

2. When passing the Reporting Points in the VTS area:

ID	Information Required
A	Vessel's name and call sign
—	Reporting point
I	Destination

3. When deviating from the planned route:

ID	Information Required
A	Vessel's name
C or D	Position

VTS Reporting Positions			
ID	Name	Position	Remarks
N	E of Bjorko	57°43.9'N, 11°42.3'E	Inbound only
O	W of Bjorko	57°43.9'N, 11°39.8'E	Inbound only
P	W of Ockero	57°43.8'N, 11°33.9'E	Inbound only
Q	NW of Vinga	57°41.2'N, 11°26.8'E	Inbound only
R	SW of Vinga	57°36.7'N, 11°25.1'E	Inbound only
S	SW of Trubaduren	57°32.9'N, 11°29.9'E	Inbound only
T	S of Trubaduren	57°31.9'N, 11°38.3'E	Inbound only
U	E of Tistlarna	57°31.9'N, 11°48.4'E	Inbound only
1	Buskars knote	57°37.1'N, 11°40.9'E	Northbound only
2	N of Vinga	57°38.3'N, 11°39.1'E	Eastbound only
3	Knippelholmen	57°41.0'N, 11°50.5'E	Westbound only
4	Arendal	57°41.3'N, 11°49.4'E	Southbound only
5	Gotaalvbron	57°42.9'N, 11°57.9'E	Westbound only

4. When arriving at an anchorage or berth:

ID	Information Required
A	Vessel's name and call sign
C or D	Name of nearest reporting line or geographical position

5. When damage has occurred to machinery, engine or navigational equipment which could affect the vessel's safe navigation and maneuverability.

ID	Information Required
A	Vessel's name
C or D	Position
I	Destination
Q	The defect or damage causing the vessel to report

6. At the request of the VTS center, all vessels must supply information for the safety and understanding of VTS, at any time they consider it necessary.

See the table titled **VTS Reporting Positions** for more details.

Contact Information.—See the table titled **Goteborg—Contact Information**.

Goteborg—Contact Information	
Port	
Call sign	Goteborg Port
VHF	VHF channels 12 and 16 (Port Control)
Telephone	46-31-3687515 (Port Control)
	46-31-3687500 (Port)
E-mail	info@portgot.se
Web site	https://www.goteborgshamn.se
Pilots	
Call sign	Gothenburg Pilot
VHF	VHF channel 11
Telephone	46-771-630-670
E-mail	gothenburgpilot@sjofartsverket.se
Web site	https://www.sjofartsverket.se
VTS Traffic Center	
Call sign	VTS Goteborg
VHF	VHF channel 13
Telephone	46-771-630-660
E-mail	vtsgothenburg@sjofartsverket.se

Anchorage.—Anchorage can be taken, in depths of 20 to 30m, clay, in the W part of Dana Fjord, outside the buoyed

channel. However, strong winds from SW raise a heavy swell in this anchorage.

Sheltered anchorage can be taken in Rivo Fjord adjacent to the South Channel. The four designated anchorage areas have depths from 12 to 17m.

Caution.—It is reported that depths less than charted may be found within the port in the river area extending E of Skandia Terminal (57°41'N., 11°51'E.).

Numerous submarine pipelines and cables lie within the harbor area. Water turbulence may be experienced in the vicinity of Cityvarvet, the main repair yard, when ship's engines are being tested.

Goteborg to Kullen

6.12 Kungen Light (57°27'N., 11°50'E.) is shown from a prominent tower, 8m high, standing on a rocky islet of the same name lying on a shoal, 5 miles SE of Tistlarna Light.

Tranebrakorna, an area of foul ground with several above-water rocks, lies centered 0.6 mile N of Kungen Light and is marked on its E side by a buoy. A detached shoal, with a least depth of 9m, lies about 0.4 mile N of this foul area.

Hallands Svartskar Light (57°22'N., 11°51'E.) is shown from a prominent tower, 7m high, standing on Svartskar, a dark islet lying 4.6 miles SSE of Kungen Light. Detached shoal patches lie up to about 2.3 miles S and 2.5 mile SSW of the light and may best be seen on the chart.

A chain of detached rocks and shoals extends between Kungen Light and Hallands Svartskar Light. It lies about 3.5 miles off the mainland coast and may best be seen on the chart.

Vastra Ron and Ostra Ron, are two high islets, which lie on foul ground about 1.7 miles S of Kungen Light.

Langen, with a least depth of 8.2m, and Rovaren, with a least depth of 16m, lie centered about 2.8 miles NW and 2.9 miles SW, respectively, of Hallands Svartskar Light. These detached shoal patches form the outermost dangers in this vicinity.


Skallaren, a detached shoal with a least depth of 9.1m, lies about 2 miles SSW of Hallands Svartskar Light. Grundabade, a detached shoal patch, lies about 1.4 miles S of Hallands Svartskar Light. It has a least depth of 1.8m and is marked by a buoy. These two shoals form the southernmost dangers in this vicinity.

6.13 Saro (57°30'N., 11°55'E.) is a high wooded peninsula located on the mainland coast, 6.4 miles E of Tistlarna Light. This peninsula is conspicuous because of its contrast against the adjacent barren area. Foul ground, covered by numerous rocks and islets, extends up to about 2.2 miles W from the seaward side of this peninsula.

A conspicuous radio mast stands 1.4 miles SE of the SW extremity of Saro. A prominent church, with a high pointed tower, is situated at Vallda, 2.6 miles SE of Saro.

Hallsundsudde (57°21'N., 12°00'E.), a mainland peninsula, is located 5 miles ESE of Hallands Svartskar Light and is marked by a beacon. A detached shoal patch, with a least depth of 6.9m, and a wreck, with a depth of 11.9m, lie about 0.3 mile and 1.3 miles, respectively, S of the S end of this peninsula.

Monster, a broad peninsula, is located 1.4 miles W of Hallsundsudde; a prominent disused lookout tower stands on its S part.

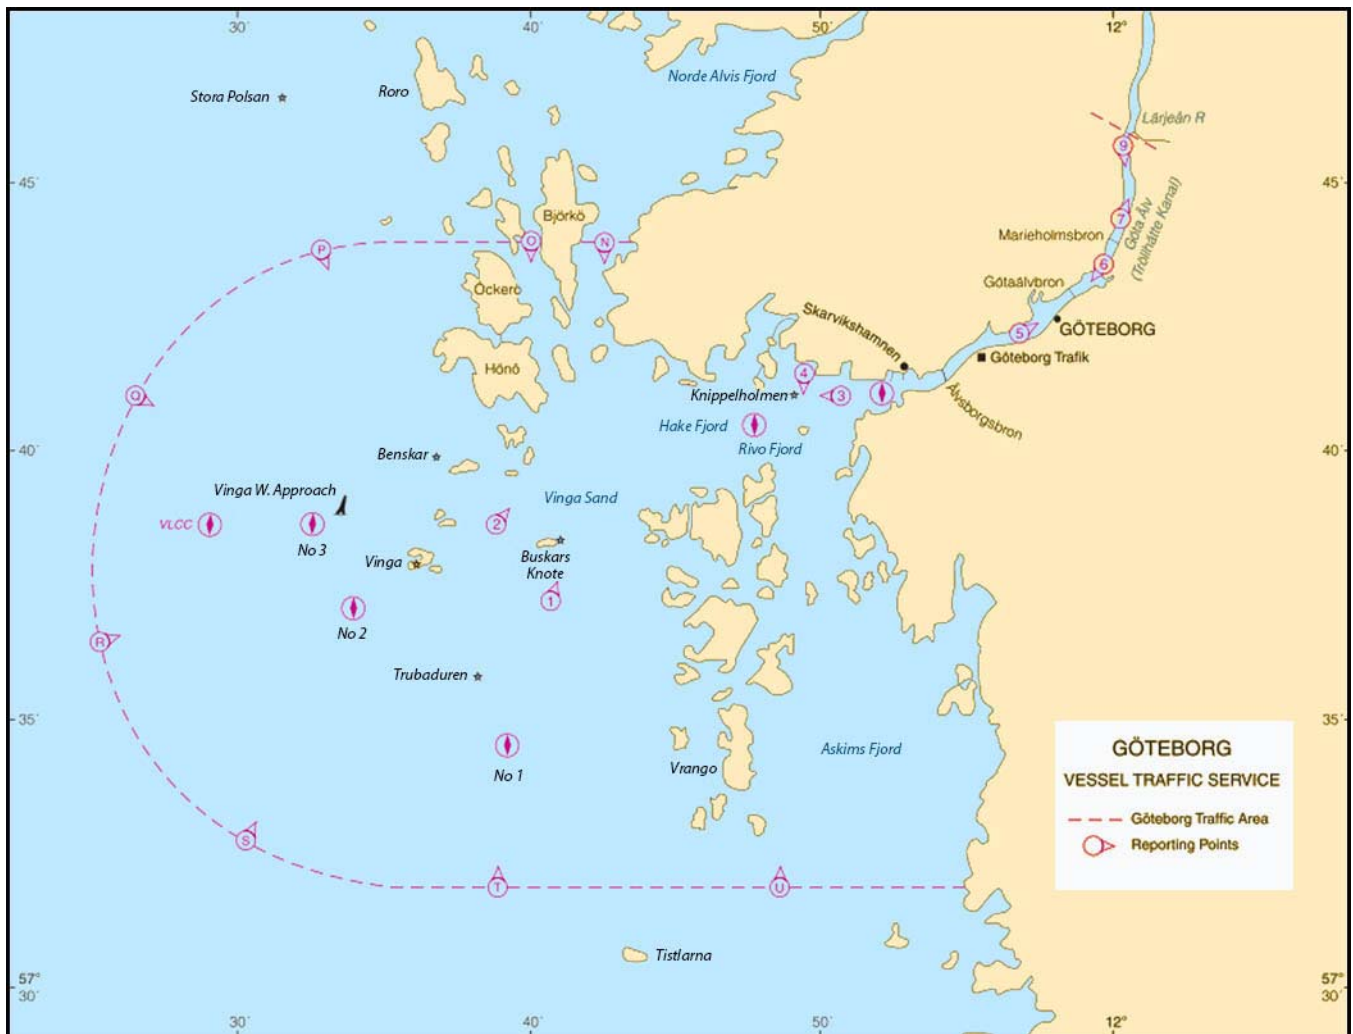

Goteborg VTS and Pilot Stations

The coast between Saro and Hallsundsudde is low and mostly featureless. The shore is fringed by numerous islands, lets, rocks, and areas of foul ground which may best be seen on the chart.

Four conspicuous radio masts stand on the mainland 3.6 miles NE of Hallands Svartskar Light. A prominent white church, with a low tower and black spire, is situated at Onsala, about 2.5 miles E of the masts.

A conspicuous dish aerial and the prominent dome of a space observatory are situated about 1.2 miles SSW of the radio masts.

A number of small harbors and marinas are situated along this stretch of coast and within the groups of islands and islets fringing the shore. These harbors have no commercial significance and are used only by small craft, local ferries, fishing vessels, and pleasure craft. Local knowledge is required. The main harbors include the following:

1. Vallda Sandö (57°29.4'N., 11°55.9'E.).
2. Lerkil (57°27.5'N., 11°54.9'E.).
3. Ockerosund (57°23'N., 11°56'E.).

4. Malo Hamn (57°22'N., 11°59'E.).
5. Skalla Hamn (57°22'N., 12°00'E.).

6.14 Malo (57°20'N., 11°58'E.), a low island, lies on a shoal bank 1 mile W of Hallsundsudde and is marked by a light at its S end. This island is barren and yellowish in color. Malo Rose, a large cairn, stands on the summit which rises in the NE part of the island. Shoals, with depths of less than 10m, extend up to about 1 mile W of the W extremity of the island and up to about 1.2 miles WSW of the S end of the island. A detached shoal patch, with a least depth of 7.7m, lies about 1.5 miles WSW of the S end of the island and is marked by a buoy.

Skarvgr, a detached shoal bank, lies 1.1 miles NW of the W extremity of Malo. It has a least depth of 1.3m and is marked by a buoy at the NW side.

Malosund, a narrow channel, lies between the N side of Malo and the mainland. It has a least depth of 6m but the currents are very strong. Local knowledge is required.

Nidingen (57°18'N., 11°54'E.), a low and sandy islet, lies 3 miles SSW of Malo and is surrounded by shoals and reefs, with

rocks awash in places.

A light is shown from a prominent tower, 23m high, standing on the W part of the islet. Two conspicuous disused light towers are situated close NE of the light and two beacons stand on the E part of the islet.



Nidingen Light

6.15 Lilleland Light (57°18'N., 11°56'E.) is shown from a prominent floodlit tower, 21m high, standing on the NE extremity of the reefs surrounding the islet, 0.9 mile ENE of Nidingen Light.

Sodra Bredaberg, a detached shoal patch, lies about 1.1 miles SSW of Lilleland Light. It has a least depth of 5.5m and is marked by a buoy. A detached shoal, with a least depth of 10.5m, lies about 0.7 mile WSW of Sodra Bredaberg.

Klockfoten, a detached shoal patch with a least depth of 10.9m, lies 1 mile WSW of Nidingen Light. Langbaden, a detached shoal, lies about 1.1 miles SW of Nidingen Light. It has a least depth of 8.2m and is marked close SW by a lighted buoy. These four shoals form the outermost dangers in this vicinity.

Directions.—An inner passage route, authorized for drafts up to 7m, leads between the off-lying dangers and those fringing the mainland coast. Local knowledge is required, particularly at night.

From a position located 2 miles ESE of Nidingen Light, the track leads NW for about 3 miles and then NNW for about 5.5 miles toward Kungen Light. It passes about 0.4 mile NE of Lilleland Light, 1 mile WSW of the W extremity of Malo, and 0.8 mile ENE of Hallands Svartskar Light. From a position located about 1.8 miles SSE of Kungen Light, the track continues in a N direction for 3.5 miles and joins the route leading though the S approaches to Goteborg, as described in paragraph 6.10.

Caution.—Several submarine cables, which may best be seen on the chart, extend NE between Nidingen and the mainland.

Due to residual danger from mines buried on the bottom, vessels are cautioned not to carry out any seabed activities within a large area lying centered 2 miles S of Nidingen. This area extends NW and NE of Nidingen and may best be seen on the chart.

6.16 Kungsbackafjorden (57°21'N., 12°03'E.) is entered

between Hallsundsudde and Nasbokrok, 2 miles E. This fjord extends in a N direction for about 7.5 miles and provides sheltered anchorage for a large number of vessels in its W part.

Fjordskar, an islet, lies about 0.7 mile NE of the SE end of Hallsundsudde and is marked by a light. Several other islets lie in the fjord but most are located within 1.2 miles of the E shore. Gottskar, a resort, is situated at the W side of the fjord, about 3.5 miles above the entrance, and is fronted by a small fishing harbor.

Vessels may anchor, in depths of 8 to 18m, clay with good holding ground, between Gottskar and Kalvo, 2.5 miles NE. The channel leading into the fjord has a controlling depth of 10m. At a position about 4.7 miles above the entrance, the fjord shoals rapidly toward the head. Ice frequently closes this fjord to navigation from December to March. Local knowledge is advised.

6.17 The mainland coast between Kungsbackafjorden and Varberg, about 15 miles SSE, is mostly low with some inland hills. The shore is fringed by numerous islands, islets, rocks, and shoals which extend up to about 3 miles seaward and may best be seen on the chart.

Texelberget, 180m high, stands about 10 miles ENE of Nasbokrok, the SE entrance point of Kungsbackafjorden. This hill rises steeply on its SE side and is conspicuous from seaward of Nidingen.

Vendelsofjorden (57°18'N., 12°08'E.), a bay, lies between Nasbokrok and Ringhals, a point located 5 miles S. It is encumbered by a number of islets and shoals.

Vendelso, a large islet, lies 1.5 miles WSW of Espenasudde, a headland located near the middle of the E shore, and is connected to it by a shallow bank. A chain of small islets and shoals extends about 3 miles SW from this islet and may best be seen on the chart.

Anchorage, sheltered from all but SW winds, can be taken, in depths of 7 to 10m, sand and shingle, about 0.3 mile E of the SE part of Vendelso and clear of the cables to the N. Vessels with drafts up to 7m can approach this roadstead. Local knowledge is advised.

Batfjorden (57°14'N., 12°06'E.), a small fjord, is entered close S of Ringhals. Its outer part contains a number of harbors used by fishing vessels and small craft. A radio mast and a water tower, both prominent, stand about 0.6 mile NE and 0.7 mile SE, respectively, of the fjord entrance. A conspicuous chimney, 113m high, is situated at a power plant, 1.2 miles NNE of the entrance.

Videberg Kraftverkenshamn (Ringhals), serving the power plant, is situated on the N side of the fjord. It provides a quay, 65m long, with a depth of 6m alongside and a ro-ro berth at the NW end.

A buoyed channel, 60m wide, leads through the offshore dangers into the fjord and is dredged to a depth of 6m. An outer approach lighted buoy is moored about 1.4 miles W of the entrance.

6.18 Klalback Light (57°09'N., 12°06'E.) is shown from a structure standing on a rock lying on a detached area of foul ground, 5.5 miles S of the entrance to Batfjorden. This foul area forms the outermost danger in this vicinity.

Balgo, a large islet, lies 2 miles ENE of Klalback Light. It is located on an area of foul ground which extends seaward from

the mainland shore almost to the light.

Fladen Light (57°13'N., 11°50'E.), equipped with a racon, is shown from a prominent floodlit tower, 26m high, standing on the NE side of Fladen, 5.9 miles SSW of Nidingen Light.

Fladen (57°10'N., 11°45'E.), an extensive off-lying shoal bank, lies centered about 12 miles W of Klaback Light. It has a least depth of 5.9m and may best be seen on the chart.

Several small harbors are situated along the coast between Kungsbackafjorden and Varberg and within the groups of islands and islets fringing the shore. These harbors have no commercial significance and are used only by small craft, local ferries, fishing vessels, and pleasure craft. Local knowledge is required.

The main harbors include the following:

1. Nortorp (57°19.5'N., 12°09.3'E.).
2. Starder (57°17'N., 12°08'E.).
3. Videberg Fiskehamn (57°15'N., 12°07'E.).
4. Bua Hamn (57°14.5'N., 12°06.9'E.).

Caution.—A submarine pipeline extends about 2.8 miles WSW from a point on the coast located 3.9 miles NNE of Klaback Light. The pipeline is marked by buoys and its seaward end is marked by a lighted buoy.

Varberg (57°07'N., 12°15'E.)

World Port Index No. 24030

6.19 Varberg is situated on the mainland SE of Getteron, a peninsula. The harbor, which serves an industrial area, faces SSW and is protected by two stone breakwaters.

Varberg Home Page
<https://www.hallandshamn.se>

Tides—Currents.—The tidal range is about 0.6m. The water level rises with W winds and falls with S winds. The maximum range occurs in the spring and autumn.



Varberg Fort

Depths—Limitations.—Farnyet, an above-water rock, lies on a shoal about 4 miles NW of Subbeberget Light. Kalkgrund, a rocky spit, extends about 0.6 mile S from the SW extremity of Getteron. It is partly awash and marked by a buoy. The above rock and spit form the outermost dangers in the NW approach to the port.

An approach channel, dredged to a depth of 11m over a width of 100m, leads NNE through the off-lying dangers for about 2 miles to the harbor.

The port provides about 1,500m of total quayage. The outer harbor has a depth of 11m. The inner harbor basin has a depth of 7.8m. The main quay, located at the E side.

There are facilities for tankers, general cargo, ro-ro, ferry, passenger, timber, and fishing vessels. Vessels up to 215m in length, 33m beam, and 10m draft can be accommodated. For more berthing information see the table titled **Varberg—Berth Information**.

Aspect.—Subbeberget Light (57°05.3'N., 12°14.3'E.) is shown from a prominent tower, 14m high, standing in the S part of Varberg, 5.7 miles SE of Klaback Light.

Approach Lighted Buoy is moored about 0.5 mile W of Subbeberget Light and marks the seaward entrance of the approach channel.

Varberg—Berth Information						
Berth	Length	Depth	Maximum Vessel			Remarks
			LOA	Draft	Beam	
Ferry Terminal						
Ferry	130m	6.5m	—	—	—	Fast ferries, ro-ro passenger/vehicles/rail, and bunkers.
Varberg						
Farehamnen	410m	11.0m	215m	10.0m	33.0m	Containers, general cargo, breakbulk, bunkers, and reefer. Commercial quay. Berthing length of 430m (including dolphins).
Gyprockajen	115m	7.8m	135m	7.3m	25.0m	Cement, gypsum, and bunkers.
Industrial N	265m	7.8m	160m	7.3m	25.0m	Breakbulk and bunkers. Continuous berthing length of 530m.
Industrial S	265m	7.9m	—	7.4m	—	



Varberg

Grimeton Aeronautical Light, 65m high, is shown from the tallest, of a group of seven conspicuous radio masts standing 5 miles ENE of Subbeberget Light.

A conspicuous fort stands 0.9 mile NNE of Subbeberget Light at the W side of the city. A water tower, which resembles a castle, and a prominent white church, located on high ground, are situated 1.7 miles NE and 2.3 miles ENE, respectively, of Subbeberget Light.

Pilotage.—Pilotage to Varberg is compulsory for the following vessels (see paragraph 5.1 for definition of vessel categories):

1. All Category 1 vessels.
2. Category 2 vessels of 80m in length or 15m beam and over.
3. Category 3 vessels of 90m in length, 16m beam, or 5.5m draft and over.

Generally, initial ordering of pilots should be carried out via the e-Services section on the Swedish Vessel Reporting System (FRS) on the Swedish Maritime Administration web site (www.sjofartsverket.se), in conjunction with the reporting on the Vessel Reporting System (FRS) section. A preliminary request for pilotage should be made at least 24 hours in advance. A definitive pilotage request must be made via the Pilot Request System at least 5 hours in advance.

Pilots board in the vicinity of the approach lighted buoy (57°03.9'N., 12°11.1'E.).

Varberg—Contact Information	
Pilots	
Call sign	Varberg Pilot
VHF	VHF channel 19
Telephone	46-771-630-680

Varberg—Contact Information

E-mail	southcoastpilot@sjofartsverket.se
Web site	https://www.sjofartsverket.se

Vessel Traffic Service.—Vessels of 45m in length and over, and all vessels of 300 gt and over, including tows, are advised to make a general call in English on VHF channel 16, as follows:

1. Twenty (20) minutes prior and again when passing Reporting Point 41 Northbound (57°05.0'N., 12°13.0'E.).
2. When leaving a quay or anchorage.
3. The general call should include the following:
 - a. Vessel's name.
 - b. Call sign.
 - c. Type.
 - d. Position.
 - e. Intended route.
 - f. Destination.
 - g. Draft.

4. Smaller vessels with VHF should report if circumstances warrant.

Anchorage.—Small vessels can anchor, in cases of necessity, in depths of 6 to 9m, sand and clay, within the roadstead lying between Varberg and Skrivareklippan, the SE extremity of Getteron.

Caution.—During strong SW gales, vessels with a draft exceeding 6.4m should not attempt to enter the harbor.

6.20 The coast between Subbeberget Light and Morups Tange Light, 10.5 miles SSE, is low with some inland hills. In the vicinity of the latter light, it has a light color. The shore is fringed by numerous rocks and shoals which may best be seen on the chart.

Rodskar (57°04'N., 12°17'E.), an islet, lies close offshore,

1.5 miles S of Subbeberget Light, and is marked by a conspicuous beacon. A detached shoal patch, with a least depth of 5.5m, lies close W of this island and is marked by a buoy.

Bjorsgardsgrunden, a shoal area, lies centered about 1.2 miles S of Rodskar. It has depths of 4 to 8.7m and is marked by a buoy at the NW side.

Galten, a detached shoal patch, lies about 1.4 miles offshore, 3 miles SSE of Rodskar. It has a least depth of 7m and is marked close W by a buoy.

Sodra Bergsrevet, a detached shoal patch, lies about 2 miles offshore, 1.4 miles S of Galten, and has a least depth of 8.5m.

The above shoal patches form the outermost dangers along this stretch of coast.

6.21 Morups Tange Light (56°55'N., 12°22'E.), equipped with a racon, is shown from a prominent tower, 28m high, standing on a point of the same name. Shoal patches, with depths of less than 10m lie up to about 3.7 miles NNW, 3.1 miles NW, and 1.5 miles WNW of this light. Skorren, a detached shoal patch, lies 1.3 miles WSW of the light. It has a least depth of 10m and is marked by a buoy. The point is fringed by shoals, with depths of less than 5m, which extend up to about 1 mile seaward and may best be seen on the chart. A spit, with depths of less than 10m, extends up to about 2 miles S from the point.

Glommen Light, shown from a structure on the head of the W breakwater, stands 0.5 mile NNW of Morups Tange Light.

Lilla Middelgrund (56°57'N., 11°56'E.), an extensive off-lying shoal area, is centered about 15 miles W of Morups Tange Light. It has a least depth of 6.2m and is marked at the NE side by a lighted buoy.

Morups Bank (56°57'N., 12°13'E.), a detached shoal area, lies about 5.5 miles SW of Morups Tange Light. It has a least depth of 11m and is marked at the NW side by a lighted buoy.

Between Morups Tange Light and Falkenberg, 5 miles SSE, the coast is low and there are few outstanding features. The shore is fringed by foul ground and rocks.

A conspicuous church is situated at Tvaaker, 6 miles SE of Subbeberget Light. A prominent chimney stands near the shore at Murarelyckan, 3.1 miles ESE of Morups Tange Light.

Several small harbors are situated along the coast between Subbeberget Light and Falkenberg. These harbors have no commercial significance and are used only by small craft and fishing vessels. Local knowledge is required. The main harbors include the following:

1. Traslovslage (57°04'N., 12°17'E.).
2. Galtaback Hamn (57°02'N., 12°19'E.).
3. Glommen (56°56'N., 12°21'E.).

Falkenberg (56°53'N., 12°28'E.)

World Port Index No. 24040

6.22 Falkenberg stands at the mouth of the Atran River, 5 miles ESE of Morups Tange. The harbor extends about 1 mile above the entrance and is protected by two breakwaters, which project 0.5 mile seaward from the mouth of the river. There are facilities for general cargo, bulk, ro-ro, and fishing vessels.

Falkenberg Terminal

<https://www.falkenbergs-terminal.se/en/about-us>

Ice.—The harbor is ice free except in severe winters when it may be closed during January and February. Winds from S and SE may cause ice accumulation in the harbor entrance.

Tides—Currents.—The tidal range is 0.3 to 0.7m.

At times, a current sets NW or SE across the entrance. This current may change direction several times a day and may attain a rate of 3 to 4 knots. When the current off the coast, setting NW or SE, encounters the outgoing current from the river, heavy seas may frequently be experienced in the approaches.

Depths—Limitations.—Detached shoals, with depths of less than 10m, lie up to about 2.2 miles W, 1.4 miles SW, and 1.2 miles S of the breakwater heads.

Knolagrund, a detached shoal bank, lies centered about 2 miles SSE of the breakwater heads. It has a least depth of 4m and is marked by a buoy.

From the vicinity of the Approach Lighted Buoy, an approach track leads NNE through the off-lying dangers. The entrance channel, 50m wide, leads NE between the breakwater heads where the depth is 7m. From this point to the inner harbor the channel depth is dredged (2020) to 6.3m.

The maximum draft for vessels calling at the port is 6.4m. Additional draft restrictions apply to vessels using the turning basin. Two fixed bridges, with vertical clearances of 5.3m, span the N end of the harbor.

Both sides of the river are quayed and provide about 1,400m of total berthage. The main quays (starting from just inside the breakwater to farther inland) include a ro-ro slip, the Falkenberg Terminal AB, the Multi Purpose Terminal, the shipyard repair quay and drydocks, and the General Cargo Terminal. These quays and the shipyard are located at the NW side of the river.

Falkenberg—Berthing Information

Berth	Length	Maximum Vessel Draft	Remarks
Falkenberg Terminal AB			
Falkenberg	300m	6.4m	Dry bulk and general cargo.
General Cargo Terminal			
General Cargo	230m	—	Animal feeds, sawn timber, and general cargo. Berthing length of 243m (including dolphins).

Falkenberg—Berthing Information			
Berth	Length	Maximum Vessel Draft	Remarks
Multipurpose Terminal			
North	105m	—	Dirty products and dry bulk.
South	115m	—	Dirty products and dry bulk.

The shipyard has two floating docks. The largest is 124m long and 22.7m wide. It has a depth of 5.1m over the blocks and can handle vessels up to 15,000 dwt. For more berthing information see the table titled **Falkenberg—Berthing Information**.



By Esbjorn Hilloberg [CC BY-SA 3.0 (<https://creativecommons.org/licenses/by-sa/3.0/>)], via Wikimedia Commons

Morups Tange Light

Aspect.—A light is shown from a prominent floodlit tower, 8m high, standing on the head of the W breakwater. An Approach Lighted Buoy is moored about 1.9 miles SSW of this light.

Troingeberget, a prominent hill, rises 3 miles NE of the breakwater heads and is 60m high. A prominent church stands at Skrea, 3.5 miles E of the breakwater heads. A prominent wind generator is reported to stand near the shore about 0.8 mile N of the breakwater heads.

Pilotage.—Pilotage to Falkenberg is compulsory for the following vessels (see paragraph 5.1 for definitions of vessel categories):

1. All Category 1 vessels.
2. Category 2 vessels of 80m in length, 15m beam, and 5m draft and over.
3. Category 3 vessels of 90m in length, 16m beam, and 5.5m draft and over.

Generally, initial ordering of pilots should be carried out via the e-Services section on the Swedish Vessel Reporting System (FRS) on the Swedish Maritime Administration web site (<https://www.sjofartsverket.se/en/Maritime-services/Pilotage/Pilot-Areas>), in conjunction with the reporting on the Vessel Reporting System (FRS) section. A preliminary request for pilotage should be made at least 24 hours in advance. A definitive pilotage request must be made via the Pilot Request System at least 5 hours in advance.

Pilots can be contacted by VHF and board in the vicinity of the approach lighted buoy (56°51'N., 12°26.8'E.).

Regulations.—All vessels within the VTS area must maintain a continuous listening watch on VHF channels 16 and 12.

A speed limit of 5 knots is in force within the harbor.

Vessel Traffic Service.—A general call is recommended for all vessels of 45m in length and over, all vessels of 300 gt and over, and all tows over 45m in length. Vessels should state their name, call sign, position, intended route, destination, and draft.

Vessels should report on VHF channel 16, as follows:

1. Twenty (20) minutes prior to passing Reporting Point 42 (56°51.1'N., 12°26.1'E.).
2. When leaving a quay or anchorage.
3. When passing Reporting Point 42 Northbound (56°51.1'N., 12°26.1'E.).
4. On arrival at a quay, when changing route, when anchoring, on the occurrence of any defects which may affect the safety of navigation, or on leaving the area.
5. Vessels larger than 20 gt, 15m or more in length, and smaller registered fishing vessels should report if their voyage or activity may influence the safe maneuvering of other vessels.

Contact Information.—See the table titled **Falkenberg—Contact Information**.

Falkenberg—Contact Information	
Pilots	
Call sign	Falkenberg Pilot
VHF	VHF channel 18
Telephone	46-771-630-680
E-mail	southcoastpilot@sjofartsverket.se
Web site	https://www.sjofartsverket.se
Port Operations	
Telephone	46-346-55600
E-mail	info@falkenbergs-terminal.se
Web site	http://www.falkenbergs-terminal.se

Caution.—With winds from SW at Force 7 or above, lightly laden vessels should not attempt to enter the port.

A number of wrecks lie in the outer approaches to the port and may best be seen on the chart.

Bottom nets, marked by piles or buoys, may be encountered off the coast in the vicinity of the port. A marine farm exist NW of the Falkenberg harbor entrance.

A submarine power cable extends across the harbor about 0.2 mile inside the breakwaters.

6.23 The coast between Falkenberg and Tylo, 17 miles SE, is generally hilly. The shore is fringed by foul ground and shoals which extend up to 2 miles seaward in places. The shore of the bay lying close N of Tylo is formed by light-colored sand dunes and may easily be identified.

A prominent church stands 2.5 miles inland at Efra, about 6 miles ESE of Falkenberg.

Tylo (56°39'N., 12°43'E.), an islet, lies close offshore and is marked by a prominent tower.

Tylogrund Light (56°38'N., 12°42'E.) is shown from a prominent tower, 23m high, standing on a shoal lying 0.7 mile SSW of Tylo. The shoal has a least depth of 1.5m and is marked by a buoy.

Wrecks, with a depth of 10m, lie about 2.7 miles and 4.7 miles WNW of Tylogrund Light.

A conspicuous windmill is reported to stand at Sardals, 6.5 miles NNW of Tylogrund Light. A prominent church, with a black spire, and a water tower are reported to be situated at Sondrum, about 3.4 miles ENE of Tylogrund Light.

Laholmsbukten (56°34'N., 12°48'E.), a large bay, lies SE of Tylo; its E shore is low and light-colored. Halmstad is situated in the NE corner of this bay.

Hallandsasen, a range of hills, rises to a height of 226m and extends SE from the S side of the bay. Knosen, 152m high, rises 11 miles S of Tylo and forms the highest elevation in the NW part of this range. This part of the coast bears some resemblance to Kullen, the S entrance point of Skalderviken located 12 miles SW, and for this reason has sometimes been called Falska Kullen.

Anchorage is available, in depths of 14 to 18m, sand and clay, good holding ground, in most of Laholmsbukten, about 3 miles offshore.

Several small harbors are situated along the coast between Falkenberg and the S side of Laholmsbukten. These harbors have no commercial significance and are used only by small craft and fishing vessels. Local knowledge is required. The main harbors include the following:

1. Stensjo Hamn (56°47'N., 12°37'E.).
2. Skallkroken (56°44'N., 12°39'E.).
3. Grotvik (56°38.5'N., 12°46.7'E.).
4. Bastad (56°26'N., 12°51'E.).

Caution.—Tylo is a designated bird sanctuary. Vessels are

prohibited from approaching within 1.5 miles of this islet.

A firing exercise area, best seen on the chart, extends 6 miles seaward from the vicinity of Ringenas (56°41'N., 12°41'E.). Vessels are prohibited from remaining in the area while firing is taking place. When firing is in progress, a warning light is shown from a tower, 25m high, standing 2.3 miles NNW of Tylo. Information regarding firing exercises times can be obtained by telephone (46-46-36-80-56).

A number of wrecks, some dangerous, lie off this stretch of coast and may best be seen on the chart.

Halmstad (56°40'N., 12°52'E.)

World Port Index No. 24050

6.24 Halmstad is situated along both banks of the Nissan River in the NE part of Laholmsbukten and serves an industrial area.

Ice.—Ice seldom obstructs navigation except during the severest winters. When necessary, icebreakers are used to keep the harbor open.

Halmstad Home Page

<https://www.hallandshamn.se>

Tides—Currents.—The maximum differences between mean water level and high and low water levels are 1.2m and 1m, respectively.

The river current is deflected to the W by the breakwater and sets across the harbor entrance.

Depths—Limitations.—The entrance channel has a width of 90m, with a limiting depth of 10.5m at the breakwater, and leads NE through the off-lying dangers into the harbor.

Ocean Harbor, a bulk terminal, is situated close inside the S breakwater, it provides 850m of berthage. Oil Harbor is situated close NE of Ocean Harbor. Import Quay, at the E side of the river.

The port has about 2,200m of total quayage. For more berthing information see table titled **Halmstad—Berth Information**. There are facilities for general cargo, ro-ro, ferry, bulk, container, tanker, and fishing vessels. Vessels up to 63,542 dwt, 200m in length, 32.2m beam, and 9.5m draft can be accommodated.

Halmstad—Berth Information

Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
Halmstad Terminal							
Eastern Harbor No. 200	—	9.0-9.3m	200m	8.5m	32.2m	56,023 dwt	Grain, breakbulk, general cargo and bunkers. More than one vessel can berth alongside simultaneously. Continuous berthing length of 548m.
Eastern Harbor No. 300	220m	9.0m	200m	8.5m	32.2m	63,542 dwt	Scrap metal, general cargo, breakbulk and bunkers.
Kattegatt No. 500	272m	9.0m	200m	8.5m	25.0m	11,286 dwt	PCC, containers, and bunkers.

Halmstad—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
Kattegatt No. 600	312m	9.0-9.5m	200m	8.5m	27.2m	17,822 dwt	PCC, containers, and bunkers.
Kattegatt No. 700	50m	10.0m	200m	9.5m	17.3m	5,533 dwt	Cement and bunkers.
Nissan Harbor No. 100	—	7.7m	200m	7.0m	16.8m	6,033 dwt	Fertilizer, scrap metal, general cargo, sawn timber, breakbulk, and bunkers.
Ocean Harbor No. 800	100m	10.6m	200m	9.5m	20.5m	3,574 dwt	Breakbulk, general cargo, and bunkers.
Halmstad Oil Terminal							
Oil No. 400	70m	9.8m	200m	9.3m	23.0m	50,000 dwt	Chemicals and petroleum products. Berthing length of 156m (including dolphins).

Aspect.—The entrance channel is marked by buoys and the limits of the fairway are indicated by lighted ranges. A light is shown from a floodlit framework tower, 10m high, standing on the head of the S breakwater. Fairway Lighted Buoy is moored about 3 miles SE of the S breakwater head.

A prominent church, with a pointed spire, stands on low land at Tronninge, about 3.7 miles SE of the S breakwater head.



Halmstad—East Dock

Pilotage.—Pilotage to Halmstad is compulsory for the following vessels (see paragraph 5.1 for definitions of vessel categories):

1. All Category 1 vessels.
2. Category 2 vessels of 80m in length, 15m beam, and 5m draft and over.
3. Category 3 vessels of 90m in length, 16m beam, and 5.5m draft and over.

Generally, initial ordering of pilots should be carried out via the e-Services on the Swedish Maritime web site (<https://www.sjofartsverket.se/en/Maritime-services/Pilotage/Pilot-Areas>), in conjunction with the Swedish Vessel Reporting System

(FRS) on the Swedish Maritime Administration Reporting System (FRS) section (see paragraph 5.1). In exceptional cases, pilots (call sign: Halmstad Pilot) may be ordered by telephone or on VHF channel 18. A preliminary request for pilotage should be made at least 24 hours in advance. A definitive pilotage request must be made via the Pilot Request System at least 5 hours in advance.

Pilots board NE of the Fairway Lighted Buoy (56°37.0'N., 12°47.0'E.).



Halmstad—Nissan Dock

Vessel Traffic Service.—A Vessel Traffic Service (VTS) operates in the approaches to the coast in the vicinity of Halmstad. The VTS area limit is indicated by the arc of a circle with a radius of 6 miles centered on the outer breakwater light (56°39'N., 12°50'E.).

The VTS system is mandatory for all vessels of 45m in length and over, all vessels of 300 gt and over, and all tows over 45m in length.

All participating vessels should report to the VTS Control on VHF channel 18, as follows:

1. Twenty minutes prior to entering the VTS area (voluntary for vessels equipped with AIS). Vessels must state their name, call sign, position, and destination.
2. Again when passing Reporting Point 43, (56°36.5'N.,

12°47.0'E.), heading NE.

3. On entering the VTS area or immediately prior to leaving a quay or anchorage. Vessels must state their name, call sign, position, intended route, destination, and draft.

4. On arrival at a quay, when changing route, when anchoring, on the occurrence of any defects which may affect the safety of navigation, or on leaving the area. Vessels must state their name, position, and destination.

The Halmstad VTS Control provides information on traffic in the area and other navigational details, including ice conditions and passage limitations. The VTS Control, which is operated from Goteborg, can be contacted by e-mail (westcoastvts@sjofartsverket.se).

All vessels within the VTS area must maintain a continuous listening watch on VHF channels 16 and 18.

Vessels in excess of 20 gt, 15m or more in length, and smaller registered fishing vessels should report if their voyage or activity may influence the safe maneuvering of other vessels.

Contact Information.—See the table titled **Halmstad—Contact Information.**

Halmstad—Contact Information	
Port	
Call sign	Halmstad Harbor Radio
VHF	VHF channel 16
Telephone	46-35-118030
E-mail	info@porthalmstad.se
Port Authority	
Telephone	46-10-2189018
E-mail	trafik@portofhalland.se
Web site	https://www.hallandshamn.se
Pilots	
Call sign	Halmstad Pilot
VHF	VHF channel 18
Telephone	46-771-630-680
E-mail	southcoastpilot@sjofartsverket.se
Web site	https://www.sjofartsverket.se

Anchorage.—Vessels can anchor, in a depth of 11m, sand over clay, within the roadstead lying between 0.5 mile and 1 mile SW of the outer breakwater, and clear of the entrance channel.

Caution.—Strong currents may be encountered off the harbor entrance.

With winds from SW at Force 7 or above, lightly-laden vessels should not attempt to enter the port.

6.25 Hallands Vadero (56°27'N., 12°34'E.), a low island, lies off the SW entrance point of Laholmsbukten, 13 miles SSW of Tylo. It is wooded and surrounded by foul ground. This island is not easily seen against the background of the mainland. A narrow channel lies between the foul ground surrounding the island and the shore bank fringing the coast.

Hallands Vadero Light (56°27.0'N., 12°32.6'E.) is shown

from a prominent tower, 13m high, standing on the NW extremity of the island.



Hallands Vadero Light

Vingaskar, a small islet, lies on the foul ground fringing the SE side of the island, 2.3 miles SE of Hallands Vadero Light, and is marked by a light. Vrenen, a small islet, lies off the E extremity of the island, 1.8 miles ESE of Hallands Vadero Light, and is marked by a prominent beacon.

Anchorage is available, in depths of 12 to 15m, sand and clay, off the SE side of Hallands Vadero, close SE of Vrenen. Local knowledge is advised.

Skalderviken (56°18'N., 12°40'E.), a large bay, extends SE for about 10 miles. It is entered between the S side of Hallands Vadero and the W extremity of Kullen, 8.5 miles SSW. The NE and S sides of this bay are low but a range of hills stands on the SW side. This range is somewhat similar to the one standing on the S side of Laholmsbukten.

Bergstromsgrund, a detached shoal patch, lies about 2 miles offshore, 6.2 miles SE of Vingaskar Light. It has a least depth of 5.2m and is marked by a buoy. This shoal forms the outermost danger lying off the NE side of the bay.

The bottom of the bay is rocky near the NE and SW shores but it consists of sand and clay in the center. A preferred anchorage lies, in a depth of 14m, about 3 miles S of Bergstromsgrund, but this roadstead is exposed to NW winds.

A conspicuous wind generator is reported to stand on the mainland about 1.5 miles SE of Vingaskar Light.

Ostra Hogkullen, 118m high, stands about 3 miles ESE of the W extremity of Kullen and is the tallest elevation in the area. Prominent churches are situated in the following towns:

1. Jonstorp (56°13.9'N., 12°40.3'E.).
2. Farhult (56°12.9'N., 12°42.7'E.).
3. Forslov (56°21.2'N., 12°49.2'E.).
4. Grevie (56°22.3'N., 12°47.5'E.).
5. Vastra Karup (56°24.8'N., 12°44.7'E.).

6.26 Kullen Light (56°18'N., 12°27'E.) is shown from a prominent tower, 15m high with an adjacent house, standing 0.2 mile SE of the NW extremity of the promontory. It has been reported that this light tower is sometimes obscured by low clouds.

Several small harbors are situated within Skalderviken and along the coast between Hallands Vadero and Kullen. These



By David Castor

Kullen Light

harbors have no commercial significance and are used only by small craft, pleasure boats, and fishing vessels. Local knowledge is required. The main harbors include the following:

1. Torekov Hamn (56°26'N., 12°37'E.).

2. Ramsjohamn (56°23'N., 12°40'E.).
3. Vejbystrand (56°19'N., 12°46'E.).
4. Magnarp (56°18'N., 12°47'E.).
5. Skalderviken Hamn (56°16'N., 12°50'E.).
6. Angelholm Hamn (56°16'N., 12°50'E.).
7. Svanshall (56°15'N., 12°40'E.).
8. Skaret (56°16'N., 12°37'E.).
9. Arild (56°16.5'N., 12°34.5'E.).


For details concerning the waters lying S of Kullen Light, see Pub. 194, Sailing Directions (Enroute) Baltic Sea (Southern Part).

Caution.—The islets surrounding Hallands Vadero are bird sanctuaries on which landing is prohibited between April 01st and July 15th. An area lying off the SW shore is a seal reserve on which entry to and landing is also prohibited as noted above.

A number of wrecks, some dangerous, lie off this stretch of coast and may best be seen on the chart.

Submarine power cables, which may best be seen on the chart, extend between Hallands Vadero and the mainland.

Numerous pleasure craft may be encountered within Skalderviken.

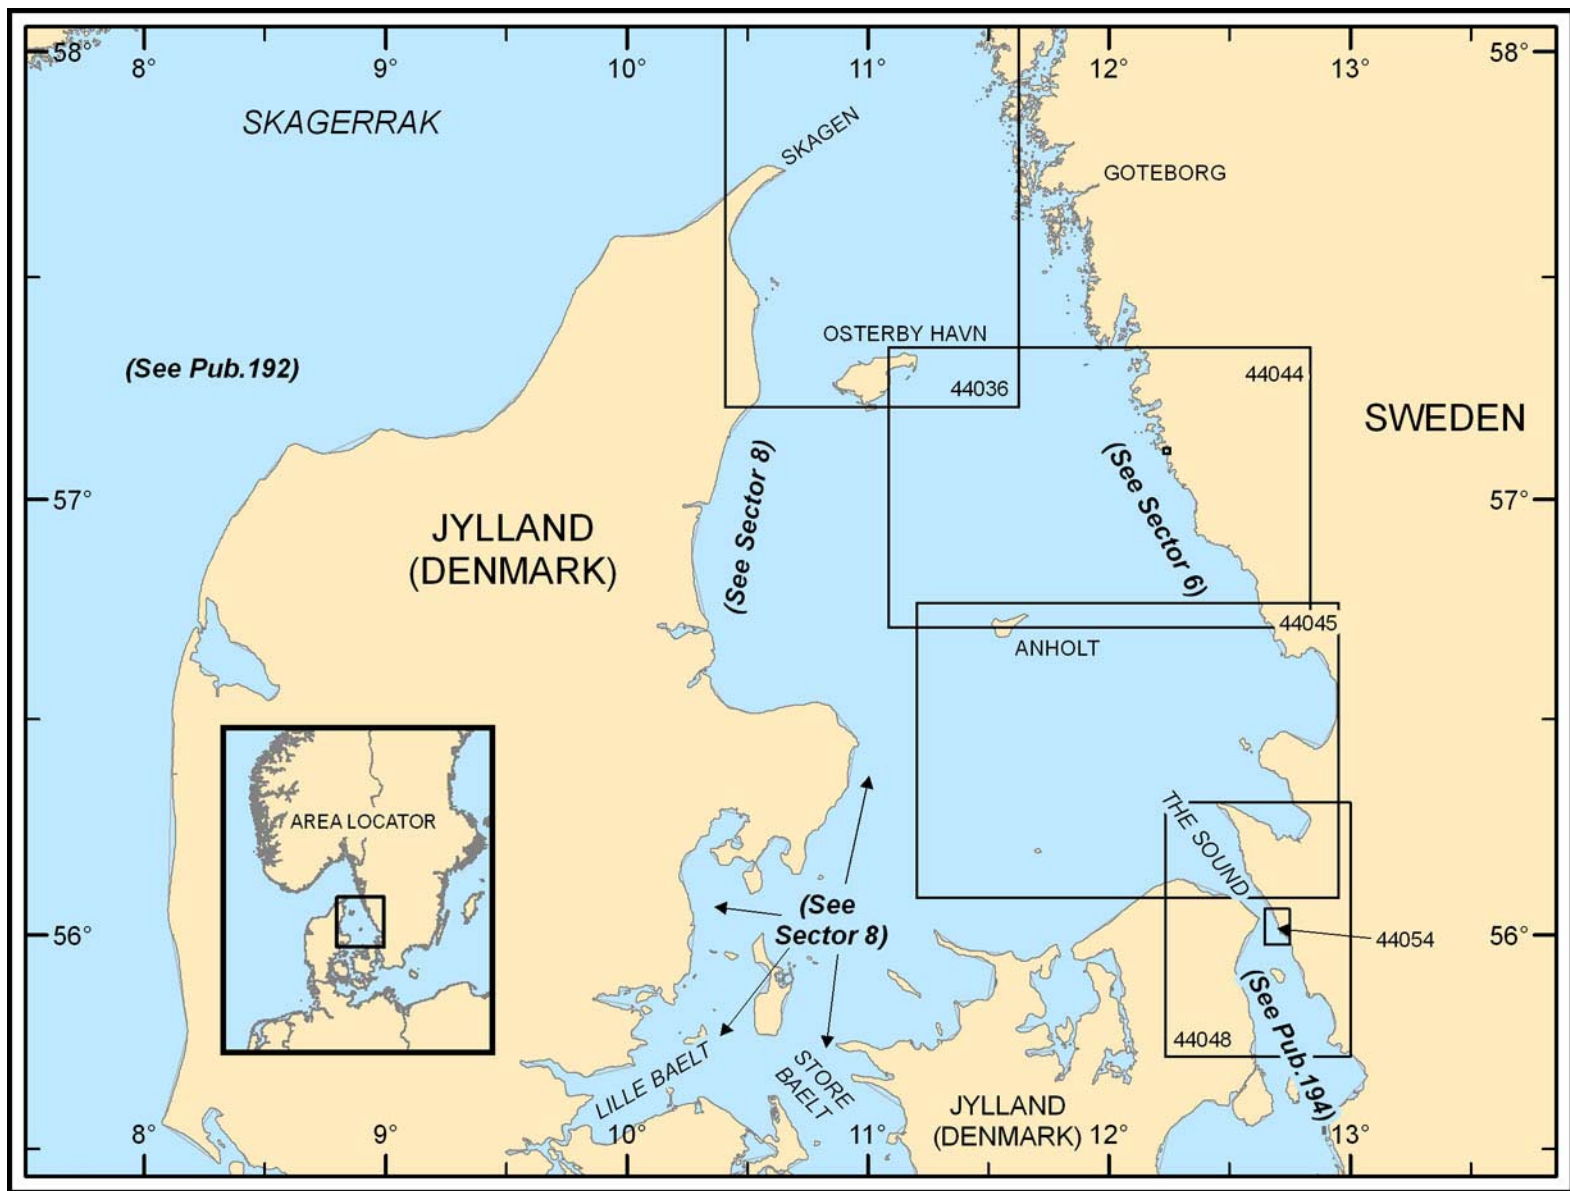

Additional chart coverage may be found in NGA/DLIS Catalog of Maps, Charts, and Related Products (Limited Distribution).

SECTOR 7 — CHART INFORMATION

SECTOR 7

DENMARK—THE SKAGERRAK—SOUTH SIDE, THE KATTEGAT, AND SJAELLAND—NORTH COAST

Plan.—This sector describes the approach to the Kattegat, via the Skagerrak and the main passages through the central portion of the Kattegat. The arrangement of this sector is NE from Hanstholm to Skagen, the NE extremity of Jylland, then S through the Kattegat, describing the islands of Laeso, Anholt, and Hesselø and the two main channels passing W and E of them. This is followed by a description of the N coast of Sjaelland, at the S end of the Kattegat.

General Remarks

7.1 The Skagerrak, lying between the N coast of Denmark and the S coast of Norway, forms the entrance to the Baltic Sea from the North Sea. Its W limit extends between the Danish coast at Hanstholm (57°07'N., 8°36'E.) and the Norwegian coast at Lindesnes (57°59'N., 7°03'E.). The Kattegat is the sea area lying between the N part of Denmark and the W coast of Sweden.

The S side of the Skagerrak extending between Hanstholm and Skagen, about 77 miles ENE, is generally low and backed by sand dunes. However, there are several areas where steep cliffs face the coast. The coastal passage leads ENE across the entrances of Vigo Bugt, Jammerbugt, and Tannis Bugt, three adjacent bights that indent the shore.

Ice.—Ice starts forming in the Kattegat along the Swedish coast near Goteborg at the beginning of January. By the end of the month, ice of very low concentration can be found sporadically in the whole area. By the middle of February concentrations can reach 25 percent along the Swedish coast. At the beginning of April ice can only be found near the Danish and Swedish coasts. The area is normally ice free by the middle of the month (see paragraph 7.8).

The Danish Ice Service, which is part of the Danish Ministry of Defense, has responsibility for ice reporting, ice breaking, and ice warning activities.

During periods when ice causes problems for shipping, Lyngby Radio and Danish Radio transmit ice reports, in addition to reports found in Danish Notice to Mariners. The Danish Defense website also published daily ice reports during ice season.

Ice breaking in Danish waters is generally open for competition, with shippers contracting directly with providers. Contact information may be found on the Danish Defense web site. Within specially appointed response areas, the Danish Ice Service maintains the possibility of activating icebreaker assistance to shippers between mid-December through mid-March. Four specific response areas are established in the following locations:

1. Limfjord W of Aalborg.
2. Limfjord between Aalborg and Hals Barre.
3. The waters S of Funen.
4. Smaalandsfarvandet (waters S of Sealand).

Ships bound for a port in an activated response area must re-

port their ETA to the Danish Ice Service, which will coordinate with the icebreaker, for which the requesting ship will incur some cost.

Danish Ice Services—Maritime Assistance Service

Telephone	45-72-850000 (switchboard)
	45-72-850369
	45-72-812054
	45-72-850364 (reports)
E-mail	mas@sok.dk
Web site	https://www.forsvaret.dk/istjenesten

For further information concerning Danish ice-breaking services, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

Tides—Currents.—The currents between Hanstholm and Skagen, set in the direction of the coast, E or W according to the direction of the wind. More prevalent is the E current. In Jammerbugt and from Hirtshals to Skagen, the current generally sets E, with an average rate of 0.5 to 1.5 knots. Storms can increase this rate to 3 or 4 knots. The tidal range on this coast is about 0.3m in calm weather, with no tidal current.

Strong winds from between SW and NW may raise the water level by about 2.5m. Strong winds from NE and E may lower the level by as much as 1.1m.

Pilotage.—Pilotage is compulsory for following vessels entering Danish internal and external waters and destined for a Danish port, reloading of cargo to and from another vessel (ship to ship transfer) in Danish territorial waters, or requiring to anchor in Danish waters:

1. Vessels carrying oil or having uncleaned and non-vented cargo tanks.
2. Laden chemical tankers.
3. Gas tankers.
4. Vessels carrying radioactive cargo.
5. Vessels carrying more than 5,000 tons of bunkers.
6. Towed vessels:
 - a. Vessels over 150 gt or over 28m in length being towed in dredged channels or marked navigational channels when entering or leaving the harbor.
 - b. Tugs shall use pilots when the towed ship is not manned or cannot be propelled by its engines.
 - c. Vessels towing or being towed within the same harbor area are exempt from pilotage.

Pilotage is not required by the following vessels:

1. A Danish vessel is not required to take a pilot even if it flies a foreign flag.
2. Vessels only carrying liquid carbon dioxide in bulk.
3. Vessels that support offshore rigs carrying the following products in bulk.

- a. Acetic acid.
- b. Hydrofluoric acid.
- c. Liquid CO₂.
- d. Liquid nitrogen.

5. Vessels may be exempt from mandatory pilotage requirements if the master has visited a coastal port or area and is dependent on the size and nature of the vessel. Full details can be obtained from the Danish Pilotage Authority.

Requirements for vessels bound for or departing Danish Ports and carrying Dangerous or Polluting Goods can be found by contacting the Naval District Kattegat Section - Marine Surveillance Center North.

Maritime Surveillance Center North	
Telephone	45-99-221600 (office hours)
	45-99-221520 (24 hours)
Facsimile	45-99-221538
E-mail	mocn@mil.dk (office hours)
	mocn-orum@mil.dk (24 hours)

Ordering deep sea pilots or harbor pilots can be done directly through the State Pilot Service or with a private pilot. Contact information for the offices which accept pilot bookings are given in the accompanying table titled **Denmark—Pilotage Ordering Offices**.

Deep Sea (Transit) pilotage (DanPilot SkawSkagen) boarding positions are as follows:

- 1. Skagen 1—57°47.5'N, 10°46.0'E.
- 2. Skagen 2—57°44.0'N, 10°45.0'E.
- 3. Skagen 3—57°49.5'N, 10°46.0'E.
- 4. Skagen 4—57°44.0'N, 10°52.0'E.

Additional pilot boarding positions along Route T, which are best seen on the chart, can be found in the following locations:

- 1. Grenaa in position 54°24.0'N, 11°05.0'E.
- 2. Sprogo NE in position 55°23.5'N, 11°00.0'E.
- 3. Store Belt/Great Belt in position 54°46.0'N, 10°49.0'E or position 54°47.5'N, 10°52.5'E.
- 4. Gedser in position 54°37.0'N, 12°16.0'E.
- 5. Bornholm in position 55°20.0'N, 14°47.0'E.

Additional pilot boarding positions along The Sound shipping route, which are best seen on the chart, can be found in the following locations:

- 1. Helsingor in position 56°07.5'N, 12°31.0'E.
- 2. Kobenhavn in position 55°45.0'N, 12°41.0'E.
- 3. Drogden in position 55°31.0'N, 12°43.0'E.
- 4. Bornholm in position 55°20.0'N, 14°47.0'E.

IMO Recommendations on local pilot services for navigation through the Entrances to The Baltic Sea are, as follows:

- 1. Route T—That vessels with a draft of 11m or more

and all vessels, irrespective of size or draft, carrying a shipment of irradiated nuclear fuel, plutonium, or high level radioactive waste (INF-cargoes) should use the services of a local pilot when transiting between Gedser to Skagen traveling in either direction.

2. The Sound—Loaded oil tankers with a draft of 7m or more, loaded chemical tankers and gas carriers regardless of size, and vessel a shipment of an irradiated nuclear fuel, (INF-cargoes), should use the services of a local pilot when transiting between Gedser to Skagen going in either direction. The Sound between a line connecting Svinbadan Light and Hornbaek Harbor, and a line connecting Skanor Harbor and Aflandshage (the southernmost point of Amager Island) should use the pilotage services locally established by the governments of Denmark and Sweden.

3. Vessels on non-stop transit pilotage (Bornholm to Skagen and vice-versa) with a draft of more than 11m should employ two pilots.

For more pilotage information please check the Danish port entries. Ordering of pilots for deep sea transit (DanPilot only) or harbor approach areas can be arranged directly from either a private pilot or the State Pilots service. Consult the list of pilots available in Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas under Denmark—Pilotage or Sweden—Pilotage.

Swedish Deep Sea Pilotage
https://www.sjofartsverket.se/en/Maritime-services/Pilotage/Deep-Sea-Pilot

The Swedish Maritime Administration provides deep sea pilotage in the water area between Sweden and Denmark and the Baltic Sea. Swedish deep sea transit pilotage, via Route S and The Sound, has five boarding positions along the route between Vinga and Bornholm. Swedish Deep Sea Pilotage via Route T has pilot boarding positions at Vinga and off Bornholm, however, a Danish pilot is required for the portion of the route that lies between Kalundborg and Spodsbjerg.

Swedish Deep Sea (Transit) Pilot Boarding Positions are, as follows:

- 1. Via Route S and The Sound:
 - a. Off Vinga in position 57°38.0'N, 11°36.0'E.
 - b. Near M1 buoy in position 56°07.5'N, 12°31.0'E.
 - c. In the vicinity of Flint SW Light in position 55°28.2'N, 12°43.0'E.
 - d. Off Trelleborg in position 55°19.6'N, 13°08.6'E.
 - e. Off Bornholm.
- 2. Via Route T:
 - a. Off Vinga in position 57°38.0'N, 11°36.0'E.
 - b. Off Bornholm.

Denmark—Pilotage Ordering Offices		
	DanPilot	Danish Pilot Services A/S
Call sign	(name of station) Pilot	—
VHF frequency	VHF channel 87	VHF channels 12 and 16
Telephone	45-63-256666	45-75-914496

Denmark—Pilotage Ordering Offices		
	DanPilot	Danish Pilot Services A/S
Facsimile	—	45-75-914493
E-mail	danpilot@danpilot.dk	info@danishpilotservice.dk
Web site	https://www.danpilot.dk	https://www.danishpilotservice.dk

Swedish Deep Sea Pilotage should be ordered 24 hours in advance via the Deep Sea Pilot Oder Center (POC) Malmo. To order deep sea pilotage services contact the Swedish Maritime Administration.

Swedish Deep Sea Pilots	
Call sign	South Coast Pilots
Telephone	46-771-630680
E-mail	southcoastpilot@sjofartsverket.se
Web site	http://www.deepseapilotage.se

When ordering, the following information must be provided:

1. Vessel name.
2. Draft.
3. Destination.
4. Date and local time.
5. Boarding position.
6. Pilot disembarkation position.
7. Estimated speed during pilotage.

Regulations.—SOUNDREP, a voluntary ship reporting system for vessels of 300 gt and over, has been established between Denmark and Sweden in the central and southern parts of The Sound in order to improve safety and protect the marine environment. This reporting system, which is operated by Sound VTS, includes a Reporting Area and an inner Operational Area. The system applies to all vessels in Danish waters in the Baltic Sea, including the transit routes. For further information, see Sector 1 in Pub. 194, Sailing Directions (Enroute) Baltic Sea (Southern Part).

Recommendations for navigating through the entrances to the Baltic Sea and along Route T have been issued by the IMO. For further information concerning these IMO Resolutions, see paragraph 7.8.

It is reported that the Baltic Sea has been designated a Sulphur Emission Control Area and regulations concerning the sulphur content of fuel used by vessels apply. For further information, see MARPOL 73/78 Annex VI regulations.

BELTREP—A mandatory ship reporting system, is operated by Great Belt (Store Baelt) VTS in the N and central parts of Store Baelt (call sign: Great Belt VTS).

BELTREP is divided into two sectors at latitude 55°35'N, with each sector having an assigned VHF channel, as follows:

1. Sector 1 (N of 55°35'N)—VHF channel 74
 2. Sector 2 (S of 55°35'N)—VHF channel 11
- The N limit of BELTREP is a line joining Fyn, Samsø, and Sjælland through the points described below:

1. Fyn—55°36.0'N, 10°38.0'E. (Korshavn)
2. Samsø—a line joining the following positions:
 - a. 55°47'N, 10°38'E. (E coast of Samsø)
 - b. 56°00'N, 10°56'E. (near Marthe Flak)
3. Sjælland: 56°00.0'N, 11°17.0'E. (Sjællands Odde)

The S limit of BELTREP is a line joining Stigsøes, Omo, Langeland, Thuro Rev through the positions described below:

1. Stigsøes—55°12.0'N, 11°15.4'E. (Gulf Oil Pier)
2. Omo—a line joining the following positions:
 - a. 55°08.4'N, 11°09'E. (Orespids)
 - b. 55°05'N, 11°09'E. (S of Orespids)
3. Langeland E—55°05'N, 10°56'E
4. Langeland W—55°00'N, 10°48.7'E. (S of Korsebolle Rev)
5. Thuro Rev—55°01.2'N, 10°44'E. (Thuro Rev Lighted Buoy)

This is a mandatory system and must be used by all vessels of 50 gt and over and all vessels with an air draft of 15m and over.

1. Reports to the VTS Authority should be made using VHF voice transmissions. However, vessels equipped with AIS can fulfill certain reporting requirements of the system through the use of AIS.

2. Vessels must give a full report when entering the mandatory ship reporting area. The full report may be combined by voice or by non-verbal means. Vessels may select, for reason of commercial confidentiality, to communicate that section of the report which provides information on the next port of call by non-verbal means prior to entering the ship reporting area.

3. Upon receipt of a report, the VTS Authority will connect the information to the vessel's position. At that time the information supplied by the facilities will be available to the vessel. Information on position will help operators to identify a vessel. Information on currents, in specific parts of the VTS area will be provided to vessels.

4. Reports to the VTS authority by voice or by text shall be in the format described in the table titled **VTS Reporting Format**.

VTS Reporting Format		
ID	Function	Information Required
A	Vessel	Vessel name, call sign, and IMO number.
C	Position	Latitude and longitude.

VTS Reporting Format		
ID	Function	Information Required
I	Next port of call	Name of the destination.
L	Route	A brief description of the intended route as planned by the master.
O	Draft	A 2- or 3-digit group giving the present maximum draft in meters.
Q	Defects and deficiencies	Details of defects and deficiencies affecting the equipment of the vessel or any other circumstances affecting normal navigation and maneuverability.
U	Vessel size	Maximum air draft and dwt.

Directions.—New traffic separation schemes (TSS), inshore traffic zones, precautionary areas, and deep water routes, implemented in July 2020, are all best seen on the chart. The measures are established to improve safety at sea at Skagen, in Kattegat and in The Sound. The intention of the new system is to create more predictable traffic patterns and to reduce the large number of ships in the existing Route T by establishing a new recommended Route S along the Swedish coast. Other recommended routes were eliminated or moved to different locations. Vessels to and from The Sound shall use Route S; vessels to and from the Great Belt shall use Route T.

The newly-recommended Route A and the newly-recommended Route B lie W of Skagen. These two-way routes run between the North Sea (Hanstholm) and the TSS Off Skagen. Route A lies 16 miles from the coast and has a minimum water depth of 23m. Route B holds a minimum water depth of 14m.

The easternmost end of Route A terminates at the new TSS Skagen West. A Precautionary Area separates this TSS from the new TSS Skagen East. A newly-established Inshore Traffic Zone exists at Skagen. From TSS Skagen East, Route T begins and heads in a SE directions for a distance of 25 miles, where it joins another Precautionary Area in the vicinity of Kummel Bank. Route T is recommended for all traffic between Skagen and the Great Belt and for ships with a draft of 10m or more, to and from the entrance to The Sound.

New Routing System in Kattegat
<http://www.sjofartsverket.se/kattegat2020>

From the Precautionary Area near Kummel Bank, Route S begins and runs SE. Route S is recommended for ships with a draft of 10m or less. Route S runs a distance of 16 miles to the new TSS Fladen, which lies just NE of Fladen Light (57°13'N., 11°50'E.). The remainder of Route S is described in detail in paragraph 7.8. Route T diverges from Route S at the Precautionary Area at Kummel Bank and continues in a SSE direction.

From the Precautionary Area at Kummel Bank, Route T runs another 42 miles, passing just E of Anholt Island, after which it changes direction and runs another 45 miles in a SW direction, passing just W of Sjaellands Rev N Light (56°06'N., 11°12'E.). Along both sections of Route T just described are the new (2020) TSS Kattegat North Deep-Water Route and TSS Kattegat South Deep-Water Route. These deep-water routes have a minimum depth of 19m and are recommended for vessels with drafts of 10m or more. For each of these deep-water routes northbound vessels not restricted by their draft, should use the area E of the deep-water route while southbound traffic not re-

stricted by their draft, should use the area W of the deep-water route. For information concerning the remaining section of Route T and the other routes through this areas, see the Directions section in paragraph 7.8.

For further information on BELTREP, see Sector 2 in Pub. 194, Sailing Directions (Enroute) Baltic Sea (Southern Part).

Caution.—Vessels entering the Skagerrak infrequently or constrained by draft should employ a deep sea pilot.

Several submarine cables, which may best be seen on the chart, extend seaward from the stretch of coast between Hanstholm and Skagen. Some of these cables carry direct current and may cause deflections of the magnetic compass.

Numerous wrecks, some buoyed, lie up to 20 miles offshore along the S side of the Skagerrak and may best be seen on the chart.

Several areas, within which buried mines or aircraft wreckage may exist, lie within the Skagerrak and may best be seen on the chart. Anchoring, fishing, or any other seabed activities are prohibited in these areas.

The entrance channels and harbors located on the S side of the Skagerrak are affected by loose sand, which is swept along the coast by gales, and are subject to silting.

Hanstholm to Skagen

7.2 Hanstholm (57°07'N., 8°36'E.), the NW extremity of Denmark, is formed by a promontory consisting of chalk and limestone, which rises abruptly from the sea. A light is shown from a prominent tower, 23m high, standing on the NW part of the promontory. Hjertebjerg, the summit of the promontory, is 67m high and rises about 2 miles SE of the light.

Shoal patches, with depths of 10m and 11m, lie about 3 miles WNW and 4 miles NE, respectively of the light.

7.3 Hanstholm Havn (57°08'N., 8°36'E.) (World Port Index No. 30455) lies approximately 1 mile NNW of Hanstholm Light and is one of the leading commercial fishing ports in Denmark. It consists of an outer port along with eight inner basins. In addition to having ro-ro and ferry terminals, the harbor provides facilities and basing for the offshore oil and gas industry. Ongoing land reclamation and quay expansion is expected to be completed sometime in 2020.

Hanstholm Havn Home Page
<https://www.hanstholmhavn.dk/en>

Tides—Currents.—The mean tidal range is 0.3m. The water



Hanstholm Havn



By Falk Lademann Neerach [CC BY 2.0 (<https://creativecommons.org/licenses/by/2.0/>)], via Wikimedia Commons

Hanstholm Light

level may be increased by up to about 1.3m during strong W winds and reduced by as much as about 1.5m during strong E winds. The harbor is reported to be ice-free all year.

Off the harbor, winds from between S and W cause an E current

and winds from between N and E cause a W current. The rate of these currents sometimes exceeds 2 knots.

Depths—Limitations.—The entrance channel is dredged to a depth of 9m on the range line; the outer part of the harbor has a dredged depth of 8.5m.

The harbor provides eight quayed basins. Berths are used by fishing vessels and commercial vessels. There is also a ferry terminal and ro-ro ramp. For berthing information see the table titled **Hanstholm—Berth Information**.

The size of the largest vessel that can be accommodated depends upon wind, current, sea conditions, and the water level at the time of entry. Under favorable conditions, the harbor can accommodate vessels with a maximum draft of 7.8m.

Aspect.—The entrance channel is indicated by a lighted range. Fairway Lighted Buoy is moored about 0.6 mile NW of the harbor entrance.

Pilotage.—Pilotage is compulsory for vessels of 50m in length and over. Pilotage is not mandatory for vessels whose master has called at Hanstholm Havn in the vessel concerned at least five times within the last 6 months.

Pilots board in the vicinity of Fairway Lighted Buoy. For further information, see Pilotage in paragraph 7.1.

Contact Information.—See the table titled **Hanstholm—Contact Information**.

Hanstholm—Contact Information	
Port Control	
VHF	VHF channels 12 and 16
Telephone	45-96-550713
E-mail	vagten@portofhanstholm.dk
Port Authority	
Telephone	45-96-550710
Facsimile	45-96-550720
E-mail	info@portofhanstholm.dk
Web site	https://www.portofhanstholm.dk
Pilots (Private)	
Telephone	45-96-550710
E-mail	info@portofhanstholm.dk
Web site	https://www.portofhanstholm.dk

Hanstholm—Berth Information				
Berth	Length	Depth	Maximum Vessel Draft	Remarks
Hanstholm Terminal				
Forhavn E	350m	—	—	Fishing vessels and breakbulk.
Forhavn W	140m	9.0m	—	Project/heavy cargo. Currently used for project material during substantial port expanse project. (2022)
No. 12	130m	8.4m	—	Ro-ro/lo-lo, fishing vessels, breakbulk, and bunkers.
No. 17	200m	7.0m	—	Ro-ro/lo-lo, fishing vessels, breakbulk, and bunkers.

Hansthalm—Berth Information				
Berth	Length	Depth	Maximum Vessel Draft	Remarks
No. 18/81	130m	9.0m	7.8m	Chemicals, fishing vessels, breakbulk, bunkers.
No. 19/85	390m	—	5.9-9.0m	Fishing vessels, breakbulk, and bunkers.
No. 23	100m	7.0m	—	Ro-ro/lo-lo, fishing vessels, breakbulk, and bunkers.
No. 24	170m	7.0m	—	Ro-ro/lo-lo, cement, fishing vessels, breakbulk, and bunkers.

Regulations.—Inbound vessels have precedence over outbound vessels.

A speed limit of 3 knots is in force inside the inner moles.

Caution.—Depths in the entrance channel and the outer part of the harbor may be reduced by silting, especially after gales.

It is reported that the head of the E breakwater is sometimes awash and difficult to distinguish.

7.4 Vigso Bugt (57°09'N., 9°00'E.) extends 13 miles E between Hansthalm and Bulbjerg. Prominent landmarks located along the shore of the bay include Vigo Beacon (57°06'N., 8°45'E.), Hjardemal Church (57°03'N., 8°48'E.), and Lild Church (57°06'N., 9°00'E.).

The bay is fringed by two sand ridges and sometimes a third ridge forms in the W part. Off Sandnaeshage, 2 miles W of Bulbjerg, there are no sand ridges and the bottom is composed of medium-sized stones.

Roshage Mole (57°08'N., 8°37'E.), a breakwater, extends N from the shore, about 1 mile ENE of Hansthalm. It protects a beach landing place for boats. This breakwater is 310m long and 2.2m high at its outer end. It stands in a depth of 3.5m and is marked by a light. There is no landing place on the breakwater and it should be given a wide berth.

Bulbjerg (57°10'N., 9°02'E.), 47m high, is a whitish yellow cliff consisting of chalk and limestone. It has a steep face and is the termination of a hilly ridge which extends about 3 miles inland. This cliff is very conspicuous from seaward.

Skarreklit (57°10'N., 9°02'E.), a vertical limestone rock, is 15m high and lies close N of Bulbjerg.

Bragerne (57°10'N., 8°56'E.), a detached rocky shoal, lies 3 miles W of Skarreklit and about 2 miles offshore. This shoal has a least depth of 0.3m and is marked by a lighted buoy. A narrow channel, with depths of 7 to 9m, lies between the S side of this shoal and the shore.

7.5 Jammerbugt (57°12'N., 9°10'E.) extends about 40 miles NE from Bulbjerg to Hirtshals. The shore of the bay between Bulbjerg and Svinklov, about 10 miles E, consists of low dunes, which increase to a height of 30m farther inland near Klim Bjerg.

Svinklov is a prominent chalk and limestone ridge covered with vegetation. A conspicuous white chalk cliff appears at its NW corner.

Other landmarks located along the shore of the bay include a conspicuous beacon at Lokken (57°23'N., 9°43'E.) and the prominent churches at Lokken and Borglum Kloster, 3 miles ESE.

A light is shown from a tube mast standing at the head of a breakwater, which extends about 180m NW from the shore at

Lokken.

Rubjerg Knude, a prominent hill, stands about 4.5 miles NNE of Lokken and consists of sand and clay. It is the highest hill in the vicinity and drops to the sea in a steep cliff.

The hills on both sides of Lonstrup (57°28'N., 9°48'E.), located about 6 miles NNE of Lokken, also consist of sand and clay with steep cliffs.

Bakken and Lonstrup Rodgrund, two detached shoals with depths of 6.6m, lie about 5 miles and 3 miles, respectively, W of Lonstrup.

Hirtshals (57°35'N., 9°57'E.), a point, is located 8.5 miles NNE of Lonstrup. The coast is hilly in the vicinity of this point. Depths of less than 10m lie up to about 2 miles W and NW of the point.

A light is shown from a prominent tower, 35m high, standing on the SW side of the point.

Caution.—A firing practice area fronts Tranum Strand (57°10'N., 9°25'E.) and is marked by beacons and buoys.

A submarine cable, best seen on the chart, extends N from Hirtshals to the 200m contour.

7.6 Hirtshals Havn (57°36'N., 9°58'E.) (World Port Index No. 30450), located on the NE side of Hirtshals, is enclosed by two moles. It is protected by a breakwater, which extends about 0.2 mile NNW from the head of the W mole. This small commercial harbor is used mainly by ro-ro passenger ferries and fishing vessels.

Tides—Currents.—The tidal range is about 0.3m. Storms from W may raise the water level by up to 1.5m; storms from E may lower the water level by as much as 1m. The current usually sets E across the harbor entrance; however, winds from NNE and S cause the current to set W. The rate occasionally exceeds 5 knots.

Depths—Limitations.—The entrance channel has a dredged depth of 8m. The harbor consists of quayed basins. Vessels up to 200m in length and 7m draft can be accommodated in favorable conditions.

For berthing information see table titled **Hirtshals Havn—Berth Information**.

Aspect.—A lighted range indicates the entrance channel.

Pilotage.—Pilotage is compulsory on arrival for vessels of 50m loa and over.

Pilots board in position 57°37.0'N, 9°57.0'E.

Pilotage is exempted for vessels whose master has called at Hansthalm Havn in the same vessel at least five times in the last 6 months.

For further information, see Pilotage in paragraph 7.1.

Contact Information.—See the table titled **Hirtshals**

Havn—Contact Information.

Hirtshals Havn—Contact Information	
Port	
VHF	VHF channels 12, 13, and 16
Telephone	45-98-941422 (24 hours)
Facsimile	45-98-944293
E-mail	havnevagten@hirtshalshavn.dk
Web site	https://www.portofhirtshals.com
Harbor Pilot (Private)	
Telephone	45-98-941-422

Hirtshals Havn—Contact Information

E-mail	havnevagten@hirtshalshavn.dk
Web site	www.portofhirtshals.com

Regulations.—Inbound vessels have precedence over out-bound vessels.

Caution.—The entrance channel and harbor basins are subject to silting, particularly after storms, and depths may be less than charted. Vessels intending to enter should first obtain the latest information concerning the depths.

7.7 The coast between Hirtshals and Skagen is fronted by Tannis Bugt. This stretch of coast, about 22 miles long, is backed by low sand dunes that increase in height as they extend across the peninsula to the shore of the Kattegat.

Hirtshals Havn—Berth Information

Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
East Basin 1					
No. 309	93m	9.0m	—	—	Ro-ro freight, fishing vessels, breakbulk, and bunkers. Continuous berthing length of 280m.
No. 313	93m	9.0m	—	—	
No. 317	93m	9.0m	—	—	
No. 331	108m	7.0m	—	—	Ro-ro freight, fishing vessels, and bunkers. Continuous berthing length of 326m.
No. 335	108m	7.0m	—	—	
No. 340	108m	7.0m	—	—	
East Basin 2					
No. 402	99m	10.5m	—	—	Ro/pax and ro-ro freight. Continuous berthing length of 198m.
No. 406	99m	10.5m	—	—	Ro/pax and ro-ro freight. Ferry lay berth. Continuous berthing length of 198m.
No. 411	185m	7.0m	—	—	Ro-ro freight. Continuous berthing length of 370m.
No. 417	185m	7.0m	—	—	
No. 424	96m	7.0m	—	—	Ro-ro freight.
No. 431	57m	7.0m	—	—	Continuous berthing length of 114m. Ro/pax, fishing vessels, breakbulk, bunkers, and ro-ro freight.
No. 435	57m	7.0m	—	—	
No. 451	98m	7.0m	—	—	Ro/pax, fishing vessels, breakbulk, and bunkers.
Dock	74m	7.0m	—	—	Ro/pax, fishing vessels, breakbulk, and bunkers.
Dock SE	91m	7.0m	—	—	Ro/pax, fishing vessels, breakbulk, and bunkers.
Ferry Terminal					
Ferry 1	140m	9.0m	—	—	Ro/pax and ro-ro freight. Berthing length of 180m (including dolphins).
Ferry 2	190m	9.0m	—	—	Ro/pax and ro-ro freight.
Middle Basin 2					
No. 3	106m	7.0m	—	—	Fishing vessels. Continuous berthing length of 212m.
No. 6	106m	7.0m	—	—	

Hirtshals Havn—Berth Information					
Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
No. 211	87m	6.2m	—	—	Fishing vessels. Continuous berthing length of 262m.
No. 215	87m	6.2m	—	—	
No. 218	87m	6.2m	—	—	
No. 263	152m	9.0m	—	—	Fishing vessels.
Fishing	154m	6.2m	—	—	Fishing vessels.
Middle Basin 3					
Pier No. 2	—	4.7m	—	—	Continuous berthing length of 132m.
North Sea Terminal					
Ferry No. 3 (Containerkajen)	290m	9.0m	200m	7.0m	Ro/pax, ro-ro passengers/vehicles/rail, project/heavy cargo, breakbulk, and bunkers.
Trailer	110m	8.5m	—	—	Ro/pax, ro-ro freight, breakbulk, and bunkers.
West Basin					
Northwest	320m	4.7m	—	—	Fishing vessels.
Slipway	98m	4.7m	—	—	Fishing vessels.
Southwest	145m	4.7m	—	—	Fishing vessels and breakbulk.

Skagen (57°44'N., 10°37'E.), also known as The Skaw, forms the NE extremity of Jylland. The land in this vicinity is flat and consists of hard sand backed by low sand hills. Grenen, the E extremity of Skagen, is a low and sandy point.

Skagens Rev (57°44'N., 10°41'E.), a spit, extends about 2 miles ENE from Grenen. It consists of hard white sand and is marked by lighted buoys. During gales, the sea breaks along the entire spit. By day, the edge of the spit may be identified by the discoloration of the water.

During E gales in winter, ice piles up on the shallowest part of Skagens Rev and sometimes remains there for a long time after the rest of the ice has disappeared.

Skagen Light (57°44'N., 10°38'E.), equipped with a racon, is shown from a prominent round tower, 46m high, standing near the S shore of Skagen, 1 mile SW of Grenen.

Skagen West Light (57°45'N., 10°36'E.) is shown from a prominent tower, 25m high, standing near the N shore of Skagen, 1.7 miles WNW of Grenen.

A prominent disused light tower is situated 1.4 miles WSW of Skagen West Light. Gammel Skagen Beacon, a pyramidal framework structure, stands 2.7 miles SW of Skagen West Light.

A conspicuous television mast, 215m high, stands about 6 miles inland, 17 miles SW of Skagen Light, and is equipped with two aeronautical lights.

The town and harbor of Skagen Havn, situated 1.2 miles SW of Skagen Light, are described in paragraph 8.3. The Skagen harbor pilot boards in position 57°42.7'N, 10°38.8'E.

Caution.—Vessels are warned against passing close to the buoys marking the extremity of Skagens Rev due to the strong current which frequently sweeps round the spit.



By Klopilz877 aus Wernigerode [CC BY-SA 3.0 (<https://creativecommons.org/licenses/by-sa/3.0/>)], via Wikimedia Commons

Skagen Light

The Kattegat—Central Islands and Main Passages

7.8 The **Kattegat** is the sea area bordered at the E side by a section of the W coast of Sweden extending between Pater Noster Skaren (58°03'N., 11°20'E.) and Kullen Light (56°18'N., 12°27'E.). Its W side is bordered by a section of the E coast of Denmark extending between Skagen and Bjornsknude (55°42'N., 10°02'E.). The S end of the Kattegat is bordered by the N coasts of Sjaelland and Fyn.

The central part of the Kattegat is occupied by the Danish islands of Laeso, Anholt, and Hesselø. These islands are sur-

rounded by banks, shoals, and reefs which extend considerable distances to seaward in some places.

The central islands, banks, and shoals divide the Kattegat into two main channels. The E channel, which is most commonly used, is deeper than the W channel and is less encumbered with dangers.

In winter, when the lighted buoys may be off station, it is not advisable for vessels with drafts of more than 5.5m to use the W channel because of the shoals lying S of Laeso Rende (57°13'N., 10°40'E.).

The bottom of the Kattegat consists mostly of fine or coarse yellowish sand. Gravel, usually of a reddish-brown color, is found in places, especially in the E part. Stones of various sizes are found throughout the Kattegat, except in the deeper parts, where the bottom is mainly clay covered with mud.

Ice.—The Kattegat and the passages leading S to the Baltic Sea lie close to the boundary between the mild winters of the NW Atlantic and the cold winters of N Europe. During some winters, mild W weather prevails and the entire area remains ice free. During other winters, cold E weather dominates the area and ice, sufficiently thick to restrict navigation for several weeks, is formed.

The ice encountered in the W part of the Baltic Sea is either pack ice, which drifts in the open sea, or fast ice, which borders the coast. Icebergs do not occur in this region.

Generally, the ice season begins in January and ends in March, with the majority of ice occurring in February. Due to the differing salinity in the area, the first ice usually forms within, and S of, Store Baelt (Great Belt), Lille Belt (Little Belt), and The Sound before forming in the Kattegat. However, in recent years, it was observed that thin ice formed earlier in the Kattegat than in the passages to the S. This was particularly true with NE and E winds, which cause colder weather on the Swedish coast than farther offshore.

When the formation of ice, in combination with drift ice from the Baltic Sea, fills the greater part of the Kattegat, navigation is impossible without the assistance of an icebreaker. For additional information on ice services see paragraph 7.1.

Pilotage.—For additional information concerning Deep Sea (Transit) Pilots boarding positions, see Pilotage in paragraph 7.1.

Deep Sea Pilots are available at the Skagen (Skaw Pilot) boarding positions. They can be contacted by VHF channels 16 and 67.

The pilot boards in the following positions:

1. Deep Sea/Transit pilotage (DanPilot ShawSkagen):
 - a. Skagen 1—57°47.5'N, 10°46.0'E.
 - b. Skagen 2—57°44.0'N, 10°45.0'E.
 - c. Skagen 3—57°49.5'N, 10°46.0'E.
 - d. Skagen 4—57°44.0'N, 10°52.0'E.
2. Harbor Pilots—57°42.7'N 10°38.8'E.

Directions.—Approximate distances from the vicinity of Skagen to Longitude 13°30'E in the SW approaches to the Baltic Sea, through the following passages:

1. Via Store Baelt—310 miles.
2. Via Lille Baelt—340 miles.
3. Via The Sound—210 miles.

The natural links from the North Sea, through the Kattegat, to the Baltic Sea are Store Baelt (Great Belt), Lille Belt (Little Belt), and The Sound. However, the Nord-Ostee-Kanal (Kiel

Kanel) provides the shortest link between the North Sea and the Baltic Sea.

Lille Belt, the W route, leads between the E coast of Jylland and the island of Fyn. The fairway channel is narrow and winding in places. It is about 67 miles long and has a controlling depth of 11m.

Store Baelt, the middle route, is used by larger deep-draft vessels. The fairway channel leads between the islands of Fyn and Sjaelland. It is about 63 miles long. The maximum depth obtainable via Route T is 17m, and the depth is permanently reduced in some area due to sand migration. In addition, variation sea level caused by tide and meteorological conditions together with unknown obstructions on the sea bottom and the sand migration, the depth of water may decrease up to 2m. Therefore, it is recommended vessels should not enter the area without sufficient UKC, taking into consideration the draft increasing factors, such as squat and effect of a course alteration.

The Sound, the E route, leads between the W coast of Sweden and Sjaelland. The fairway channel forms the shortest route to the Baltic Sea. It is about 65 miles long and has a controlling depth of 7.7m.

The above routes are described in detail within Pub. 194, Sailing Directions (Enroute) Baltic Sea (Southern Part).

Several designated through routes are situated within the Kattegat. Route T, the main track, is well marked by navigation aids and is recommended for large vessels. This route leads from the vicinity of Skagens Rev through Store Baelt to a position located about 25 miles W of Kap Arkona (54°41'N., 13°26'E.). Sections of this track are designated as Deep Water Routes. Route C, which is slightly shorter, but has less depth, hugs the Danish coast and runs to the S from Skagen and ultimately merges with Route T near Sjaellands Rev N Light. Route S hugs the Swedish coast and runs to the S towards Hoganas and the entrance to The Sound. Route D, which lies to the S of Anholt Island, runs in a ENE and WSW direction, joining Route C and Route T. These routes are described in more detail below.

New Routing System in Kattegat

<http://www.sjofartsverket.se/kattegat2020>

Route T.—Beginning at TSS Skagen East, Route T, which is the main track through Kattegat, leads approximately 25 miles in a SE direction to the Precautionary Area located just E of Kummel Bank. Route T continues, through and past the Precautionary Area, for another 42 miles SSE. Along this stretch of the route lies the Kattegat North Deep Water Route.

Continuing SSE, Route T passes just E of Anholt Island, after which it changes direction and runs another 45 miles in a SW direction. Route T passes the E end of Route D just to the S of Anholt Island. Along this stretch of the route lies the Kattegat South Deep Water Route.

Both the Kattegat North Deep Water Route and THE Kattegat South Deep Water Route are recommended for ships with drafts of 10m or more. The minimum water depth in these routes is 19m, however, it was reported (2020) a depth of 18.3m exists along the W edge of the Kattegat South Deep Water Route and may best be viewed on the chart.

Continuing in a SW direction, Route T passes about 1.5

miles NW of Sjaellands Rev N Light (56°06'N., 11°12'E.), which is equipped with a racon. Route C joins Route T about 6 miles SSW of the light, in the vicinity of No. 13 Lighted Buoy (56°01'N., 11°05'E.). Route T continues SW and forms the principal track for large vessels passing through the Samsø Bælt and entering the N part of Store Bælt (Great Belt).

Route T divides in the vicinity of No. 16 Lighted Buoy (55°55'N., 10°57'E.), which is equipped with a racon.

An IMO-adopted Traffic Separation Scheme (TSS), which may best be seen on the chart, leads 7.5 miles SW from No. 16 Lighted Buoy to No. 20 Lighted Buoy (55°49'N., 10°49'E.). An inshore traffic zone lies E and SE of this TSS.

The traffic lanes of the TSS are 800m wide. They have a least depth of 15m and must be used by vessels with a draft of 13m or less.

A designated deep water route, which may best be seen on the chart, leads 5 miles WSW and then 3.5 miles S from No. 16 Lighted Buoy to No. 20 Lighted Buoy. This route, which passes between the S side of Hatter Rev shoal and the N side of Hatter Barn shoal, has a least depth of 19m and must be avoided by vessels capable, because of their draft, of navigating outside the route.

From No. 20 Lighted Buoy, Route T continues S for 4.5 miles into Store Bælt and passes about 1.3 miles W of Rosnaes Puller Light (55°45'N., 10°51'E.).

Route T is available for vessels with drafts up to 17m. However, charted depths may be reduced by as much as 2m due to unknown and moving obstructions. The depths along the track may also be reduced by meteorological conditions. Vessels are advised to contact the local authorities prior to transit for the latest information.

Route C—From the precautionary area at Skagen, Route C leads S and then SSE to No. 6 Lighted Buoy (56°58'N., 10°52'E.). It continues SSW for 7 miles to No. B7 Lighted Buoy (56°51'N., 10°48'E.).

The track then leads SE then SSE to No. 4 Lighted Buoy (56°24'N., 11°06'E.), a distance of 30 miles. Route C intersects Route D at that position. From No. 4 Lighted Buoy, Route C leads S for a distance of 22 miles to No. 13 Lighted Buoy (56°01'N., 11°05'E.), where it joins Route T.

Route D—Route D runs a distance of 20 miles and is located S of Anholt Island. Route D connects Route T to Route C at No. 4 Lighted Buoy (56°24'N., 11°06'E.).

Route S—Vessels to and from The Sound shall use Route S. From the Precautionary Area near Kummel Bank, Route S begins and runs SE. Route S is recommended for ships with a draft of 10m or less. Route S runs a distance of 16 miles to the new TSS Fladen, which lies just NE of Fladen Light (57°13'N., 11°50'E.). The route turns slightly more S at the new TSS Lilla Middelgrund, a distance of 18 miles. At TSS Lilla Middelgrund, Route S again turns slightly more S and runs a distance of 45 miles to TSS Entrance to the Sound. Route S between Store Middelgrund and the TSS Entrance to the Sound, a distance of approximately 20 miles, passes through a marine reserve where anchoring is prohibited. Two new (2020) Inshore Traffic Zones, E and W, best seen on the chart, are established at the entrance to The Sound.

All of the above routes and navigational aids may best be seen on the chart. For continuation of these routes, see Pub. 194, Sailing Directions (Enroute) Baltic Sea (Southern Part).

Regulations.—Extracts from IMO Resolutions concerning recommendations for navigating through the entrances to the Baltic Sea are stated below.

The recommendations for transiting Route T are, as follows:

1. Ships over 40,000 dwt, when passing through the entrances to the Baltic Sea, in view of the fact that 17m is the maximum obtainable depth without dredging in the area NE of Gedser and that the charted depths, even under normal conditions, may be decreased by as much as 2m due to unknown and moving obstructions, should:

a. Not pass the area unless they have a draft with which it is safe to navigate through the area, taking into account the possibility of depths being as much as 2m less than charted, as mentioned above, and additionally taking into account the possible changes in the indicated depth of water caused by meteorological or other effects.

b. Participate in BELTREP, the ship reporting system operated by governments of Denmark and Sweden.

c. Exhibit the signal prescribed in Rule 28 of the International Regulations for Preventing Collisions at Sea (72 COLREGS) in certain areas of Store Bælt (Hatter Rev, Vengeancegrund, and in the narrow route E of Langeland), when constrained by draft.

2. Ships with a draft of 11m or more should, furthermore:

a. Use for the passage the pilotage services locally established by the coastal states.

b. Be aware that anchoring may be necessary due to weather and sea conditions in relation to the size and draft of the ship and the sea level and, in this respect, take special account of the information available from the pilot and from radio navigation information services in the area.

3. Ships, irrespective of size and draft, carrying a shipment of irradiated Nuclear Fuel, Plutonium, and High Level Radioactive Wastes (INF cargo) should:

a. Participate in BELTREP, the ship reporting system operated by governments of Denmark and Sweden.

b. Use for the passage the pilotage services locally established by the coastal states.

4. Shipowners and Masters should consider the full potential of the new and improved navigation equipment introduced in the revised SOLAS chapter V, including Electronic Chart Display and Information System (ECDIS), when navigating in these narrow waters.

The recommendations for transiting The Sound are, as follows:

1. Loaded oil tankers with a draft of 7m or more, loaded chemical tankers and gas tankers, irrespective of size, and ships carrying a shipment of irradiated Nuclear Fuel, Plutonium, and High Level Radioactive Wastes (INF cargo), when navigating The Sound between a line connecting Svinbaaden Light and Hornbaek Harbour and a line connecting Skanor Harbour and Aflandshage (the S extremity of Amager Island) should:

a. Use for the passage the pilotage services locally established by the coastal states.

b. Be aware that anchoring may be necessary due to weather and sea conditions in relation to the size and draft of the ship and the sea level and, in this respect, take special account of the information available from the pilot and

from radio navigation information services in the area.

2. Shipowners and masters should consider the full potential of the new and improved navigation equipment introduced in the revised SOLAS chapter V, including Electronic Chart Display and Information System (ECDIS), when navigating in these narrow waters.

For further information concerning BELTREP, see Sector 2 in Pub. 194, Sailing Directions (Enroute) Baltic Sea (Southern Part).

Caution.—Several mine danger areas, which may best be seen on the chart, lie within the Kattegat. Anchoring, fishing, and any other seabed activities are prohibited in these areas. The risks to surface navigation in the areas are considered to be no more than the normal marine hazard.

Several submarine cables, which may best be seen on the chart, extend across the Kattegat, between Denmark and Sweden.

Several passenger ferries frequently cross the Kattegat. They run between Goteborg and Frederikshavn, Varberg and Grenaa, and Halmstad and Arhus. High-speed ferries operating between the mainland and Sjaelland may be encountered in the vicinity of Sjaellands Rev N Light (56°06'N., 11°12'E.).

7.9 Laeso (57°17'N., 11°00'E.), with its W end situated about 11 miles off the coast of Denmark, is the northernmost and largest of the islands lying in the Kattegat. This island presents a prominent obstruction because it is low and surrounded on all sides by projecting reefs and shoals.

Laeso is devoid of trees and its N side, with a ridge of sand dunes, is the highest part. Hojsande (57°18'N., 11°02'E.), the tallest hill, rises in the middle of the N side and is 24m high.

Laeso NW Rev (57°17'N., 10°47'E.), a sandy bank with depths of less than 2m, extends about 4 miles WNW from the W extremity of Laeso. Its outermost edge is steep-to. A lighted buoy is moored close off the W side of the bank and marks the wreckage of a former light structure.

Byrum Church stands 4 miles E of the W extremity of the island. It has a prominent steeple, 30m high.

Vestero Havn (57°18'N., 10°55'E.), a small fishing and ferry harbor, is situated on the NW side of the island and is protected by two breakwaters. The entrance channel is dredged to a least depth of 3.5m. It leads SE and is indicated by a lighted range. Vessels up to 50m in length, 12m beam, and 3.4m draft can be accommodated. Local knowledge is required. A prominent church, with a red steeple, is situated in the town close S of the harbor.

For more berthing information see the table titled **Vestero Havn—Berth Information**.

Nordre Ronner (57°21'N., 10°55'E.), lying about 3.8 miles N of Vestero Havn, consists of a group of four grass-covered

islets, 2 to 3m high. A light is shown from a prominent tower, 18m high, standing on the W side of the group.



Nordre Ronner Light

Ronnerev, a shallow spit, extends SSE from the vicinity of the light to the N shore of the island. Borfeld, a reef which dries at its N end, lies centered about 1 mile SW of the light. Detached shoal patches, with depths of less than 1m, lie up to 1.2 miles W and 1 mile NNE of the light and are marked by buoys.

7.10 Syrodde Light (57°19'N., 11°12'E.) is shown from a framework tower, 9m high, standing on a point of the same name, which forms the E extremity of the island. A beacon is situated 0.5 mile S of the light.

Danzigmand, a prominent dune, is 12m high and rises close W of Syrodde. Jegenshoj, another dune, is situated a little farther W. It is 9m high and can be easily recognized by a deep cleft in the middle.

A conspicuous radio mast, 160m high, stands on the SE part of the island, about 5.5 miles SW of Syrodde Light.

Osterby Havn (57°19'N., 11°08'E.), a small fishing and yachting harbor, lies about 2 miles W of Syrodde Light. It is protected by a curved breakwater and a mole. The entrance is 35m wide and has a depth of 3.5m. Vessels up to 50m in length, 12m beam, and 3.4m draft can be accommodated. Local knowledge is advised.

Foul ground and shoals, with depths of less than 1m, extend up to about 0.8 mile from the shore, 0.6 mile E of the harbor entrance.

7.11 Laeso Trindel (57°26'N., 11°15'E.) lies about 6.7 miles NNE of Syrodde Light and is marked close E by a lighted buoy. This steep-to rocky patch has a least depth of 3.8m and is one of the most dangerous shoals in the Kattegat.

Vestero Havn—Berth Information					
Berth	Length	Maximum Vessel			Remarks
		LOA	Draft	Beam	
Vestero Havn Terminal					
East	50m	50m	3.4m	12.0m	Ferries and fishing vessels.
West	60m	50m	3.4m	12.0m	Ferries and fishing vessels.

Laeso NE Flak, with depths of less than 10m, extends NNE for about 4 miles from Syrodde Light. The NE extremity of this bank is steep-to and is marked by a lighted buoy. Strong currents have been experienced in this vicinity.

The 20m curve, lying 8 to 10 miles seaward, forms the N side of a large bank which fronts the N side of Laeso.

No. 3 Lighted Buoy (57°28'N., 11°25'E), equipped with a racon, is moored about 6 miles ENE of Laeso Trindel and marks Route T.

Small vessels can anchor, clear of the dangers and submarine cables, in depths of 4 to 7m, sand and stones, off the N coast of Laeso. The roadstead provides excellent shelter from all winds except those from N.

The S side of Laeso is fronted by a large and nearly drying sandy flat, which extends about 3.5 miles S from the island. Hornfiskron, a small and sandy island, lies on this flat close off the S extremity of the island. Sondre Ronner, lying on the SW edge of the flat, consists of several rocks, one of which is always awash. A group of rocks, with depths of less than 2m, lies about 2 miles farther SW.

An extensive shoal area, with depths of less than 6m, extends about 14 miles S and SSE from the S edge of the sandy flat and may best be seen on the chart.

Kobbergrund, consisting of a number of small sand banks with depths of 2 to 3m, lies at the E side of this area. It is marked by a lighted buoy, moored about 12.7 miles SSE of Syrodde Light, and is one of the most dangerous shoals in the Kattegat.

A shoal area, with depths of less than 10m, extends about 5 miles farther S and SSE and may best be seen on the chart.

A prominent meteorological survey mast, 60m high, was reported (1999) to stand about 14 miles S of Syrodde Light.

Sandon, an extensive bank with depths of less than 20m, extends between the flats fronting the S side of Laeso and the flats fronting the N side of Anholt. Groves Flak, a large bank with depths of 13 to 24m, lies centered 16 miles SE of Syrodde Light at the E side of Sandon. A narrow deep, with depths up to 95m, separates the two banks. It was reported that a survey station marked by buoys is moored on the N part of Groves Flak.

Caution.—Large vessels and those not intending to anchor off Laeso should not approach the N coast of the island within depths of less than 20m, when the weather is bad.

A danger area, with a radius of 150m, lies centered about 0.7 mile NW of Osterby Havn and may best be seen on the chart. Anchoring and fishing are prohibited within this area due to the presence of mines.

Local knowledge is required to anchor on the sheltered shoal areas lying S of Laeso.

7.12 Anholt (56°43'N., 11°34'E.) lies about 35 miles SSE of Laeso and is also fronted by dangerous shallows. The E part of the island consists of low sand dunes. The W part rises from a narrow sandy foreshore to sandhills that reach heights of over 30m. The island is devoid of trees.

Nordberg, 39m high, stands on the NW extremity of the island; Sonderbjerg, 48m high, rises on the SW extremity of the island. Ostebakke, 24m high, is situated about 2 miles NNE of Sonderbjerg. These sand hills are conspicuous from the W.

Anholt Light (56°44'N., 11°39'E.) is shown from a prominent round tower, 42m high, standing on the E end of the is-



Anholt Light

land.

Anholt Osterrev, a narrow and shallow spit on which there are several large boulders, extends ENE for about 4.5 miles from the light and is marked by a lighted buoy.

A coastal bank, with depths of less than 6m, surrounds Anholt and may best be seen on the chart. This bank extends about 6 miles NW from the NW extremity of the island and is marked by a buoy. It extends about 4 miles WSW from the SW side of the island and is marked by a lighted buoy. However, on the SE side of the island, the bank is very narrow, with depths of 20m lying only about 0.5 mile offshore.

Nordvestrev, a narrow reef, extends about 5 miles NW from the NW extremity of the island. Depths of less than 2m lie at the outer part of the reef and the inner part dries.

Anholt Havn (56°43'N., 11°31'E.), situated on the W side of the island, is formed by two curved breakwaters. It is used by fishing vessels and pleasure craft. The entrance is 45m wide and has a depth of 3.7m. It is subject to silting. Vessels up to 75m in length, 15m beam, and 3.2m draft can be accommodated.

A sector light is shown from the N head of the outer breakwater. Anholt Church, with a white spire, is conspicuous but can only be seen from the S.

The main approach channel leads SE across the coastal bank and has a least depth of 4.2m. An alternate approach channel leads NE to the harbor and has a least depth of 3.2m.

Large vessels can anchor off the N side of the island, in depths of 8 to 12m, sand. Small vessels can anchor off the W side of the island, but large vessels must moor so far offshore that the island offers little shelter from the sea raised by E winds.

Caution.—A Nature Reserve Area, into which entry is prohibited, fronts the NE extremity of Anholt and extends about 0.4 mile seaward.

Several restricted areas lie within 7 miles S and SW of Anholt and may best be seen on the chart. Due to the existence of wrecks, anchoring, fishing, or other seabed activities are prohibited in these areas due to the existence of bottom mines. Two similar areas lie 2 miles NNW and 14.5 miles SSW of the island.

7.13 Hesselo (56°12'N., 11°43'E.), 20m high, is a small is-

land located about 32 miles S of the E extremity of Anholt. A light is shown from a prominent tower, 24m high, standing on the summit of the island.

A reef, on which there are some rocks awash, extends NW for about 2 miles from the NW extremity of the island and is marked by a buoy. A narrow sand-spit, with depths of less than 3m, extends SE for about 1 mile from the SE end of the island and is marked by a lighted buoy. A rock, on which the sea breaks during storms, lies at the outer end of this spit.

Caution.—A dangerous wreck has been reported to lie about 12.5 miles WNW of Anholt Light at (56°49.5'N., 11°18.5'E.).

Vessels navigating in this area without local knowledge are advised not to approach the island within a depth of 20m.

Lysegrund (56°18'N., 11°48'E.), a large and shallow shoal, lies centered about 6 miles NNE of Hesselo. The bottom of this shoal consists mainly of sand, with scattered patches of weed, but in depths of less than 4m there are rocks. The discoloration over the shoal can usually be seen from a short distance. The NW and SW extremities of the shoal are marked by buoys.

A light is shown from a structure, 9m high, standing on the NE part of the shoal.

Lille Lysegrund (56°18'N., 11°30'E.), a detached rocky shoal, lies 9 miles NW of Hesselo and has a least depth of 7.6m.

7.14 Briseis Flak (56°20'N., 11°20'E.) lies about 15 miles W of Lysegrund Light. This shoal has a least depth of 4m and is marked by a buoy. The bottom on this shoal consists mainly of light-colored sand, gravel, and stones.

Hastens Grund (56°14'N., 11°12'E.) lies about 17 miles W of Hesselo Light. This narrow shoal bank has a least depth of 2.5m and is marked by a buoy. The bottom is mostly gravel, with patches of fine sand and rock.

Schult's Grund (56°10'N., 11°11'E.) lies about 1.5 miles S of the S end of Hastens Grund. This shoal bank has a least depth of 3.8m and is marked by a buoy and a lighted buoy.

Route T passes between Lille Lysegrund and Briseis Flak. It continues in a SW direction and passes SE of Hastens Grund and Schult's Grund.

Caution.—A restricted conservation area, within which wild animals and birds are protected, extends up to 3 miles seaward of Hesselo. Vessels are prohibited from passing over the reefs between 15 April and 30 September.

Restricted Areas lie centered 7.5 miles WNW and 9 miles NW of Hesselo Light. Anchoring, fishing, or other seabed activities are prohibited in these areas due to the existence of bottom mines. Similar areas lie centered 5.5 miles W and 3.5 miles SW of Briseis Flak.

7.15 Eastern Channel.—Eastern Channel, the main passage in the Kattegat, lies E of Laeso and Anholt. It is known as Osterrannan by the Swedish and Osterrenden by the Danish. Route T initially follows this channel and then leads SW from a position located close E of Anholt.

Dybe Rende (57°45'N., 11°20'E.), a deep with depths of 75 to 110m, is located in the N part of this passage and may best be seen on the chart. It lies from 9 to 14 miles off the Swedish mainland coast and extends from the Skagerrak to the parallel of Fladen Light (57°13'N., 11°50'E.). The bottom of this deep

consists of clay.

In the S part of the passage, the bottom consists of mud and blue clay in depths over 28m. In lesser depths, the bottom consists of sand and shells, but farther inshore, coarse sand and gravel are found.

Fladen (57°10'N., 11°45'E.) and **Lilla Middelgrund** (56°57'N., 11°56'E.) lie on the E side of the passage. These shoals are described fully in paragraph 6.18 and paragraph 6.21, respectively.

Stora Middelgrund (56°33'N., 12°06'E.), an isolated rocky shoal bank, lies in the S part of the passage, about 18 miles SE of Anholt Light. It has a least depth of 6.6m.

7.16 Western Channel.—Western Channel is the passage leading W of the islands and shoals lying in the middle of the Kattegat. The passage leads S from E of Skagen and crosses the broad flat, with depths of 20 to 30m, which lies E of Albaek (57°36'N., 10°25'E.). It then passes through Laeso Rende. Route B begins W of Laeso, trending S, SE, and SSW before continuing SE across the S part of the Kattegat to the entrance of The Sound.

Herthas Flak (57°38'N., 10°52'E.), a detached shoal bank, lies about 10 miles SE of Skagen Light and has a least depth of 9.2m.

Laeso Rende (57°17'N., 10°42'E.) is the channel lying between the dangers fronting the Danish coast and the shoals extending seaward from the W side of Laeso. The fairway within Laeso Rende has a least depth of 12m.

Laeso Rende Light (57°13'N., 10°40'E.), equipped with a racon, is shown from a prominent tower, 26m high, standing about 6.5 mile WSW of the W extremity of Laeso. This light marks the W side of the channel.

At a position located about 13 miles SSE of Laeso Rende Light, the channel widens but it is obstructed by a number of shoal banks, which lie parallel to the coast and may best be seen on the chart.

For information concerning the Danish coast extending S of Skagen and the waters in the SW part of the Kattegat, see Sector 8.

Sjaelland—North Coast

7.17 Sjaelland (55°35'N., 12°00'E.) is the largest island in an archipelago which stretches between the Swedish coast and Jylland (Denmark). The Sound leads S off the E side of this island and the Store Baelt leads S off the W side. A considerable amount of marine traffic uses these two passages. The N coast of the island, which lies at the S end of the Kattegat, extends between Gilbjerg Hoved and the peninsula of Rosnaes, 53 miles WSW.

Gilbjerg Hoved (56°08'N., 12°18'E.), the NW entrance point of The Sound, consists of a steep cliff, 33m high, lacking any tree growth.

Gilleleje, a resort town with a prominent water tower and church, stands about 0.7 mile ESE of the point. Nakkehoved Light is situated 1.7 miles ESE of the point. These landmarks and the waters lying E of Gilbjerg Hoved are described with the The Sound in Pub. 194, Sailing Directions (Enroute) Baltic Sea (Southern Part).

For about 2 miles WSW of Gilbjerg Hoved, the coast is quite low. It then rises to steep light-colored cliffs until close NE of

Tisvilde, a village situated about 5 miles farther SW. A prominent church stands at Vejby, 2 miles E of Tisvilde.

Tisvilde Hegn, a large wooded area, is situated close SW of Tisvilde and 9 miles SW of Gilbjerg Hoved. It is conspicuous from seaward. Salgardshøj, a hill, rises about 2 miles NE of Tisvilde. It is 49m high and surmounted by a radio mast.



By Simontune [CC BY 3.0 (<https://creativecommons.org/licenses/by/3.0/>)], via Wikimedia Commons

Spodsbjerg Light

Spodsbjerg Light (55°59'N., 11°52'E.) is shown from a tower, 9m high, standing on a prominent point of the same name, 16 miles SW of Gilbjerg Hoved. The coast between is fronted by a bank, with depths of 5m lying up to about 1.2 miles offshore in places.

Isefjord (55°55'N., 11°50'E.) is entered between Spodsbjerg Light and Korshage, a low and sandy point, 2.5 miles W. Gronnerevle, a large sand bank with depths of less than 6m, fronts Korshage and is marked by buoys. It extends up to about 2.2 miles N from the shore and E to within 1 mile of Spodsbjerg Light. For a further description of Isefjord, see paragraph 7.21.

Caution.—An explosive dumping area, which may best be seen on the chart, lies centered about 6 miles WNW of Gilbjerg Hoved and is marked by buoys. Navigation by unauthorized vessels is prohibited in the area.

An unexploded ordnance area, which may best be seen on the chart, lies centered about 7 miles NW of Gilbjerg Hoved.

A firing practice area, marked by buoys, fronts the coast between Tisvilde and Spodsbjerg Light. Warning signals are displayed from two signal stations situated on the coast when firing is in progress.

7.18 Gniben (56°01'N., 11°17'E.), 19m high, is the NW extremity of Sjaellands Odde, the peninsula forming the NW end of Sjaelland. This peninsula is mostly low but there are a few hills on its central part.

A conspicuous mill, without sails, stands at Yderby, about 3 miles SE of Gniben. A prominent church is situated at Odden, 5 miles SE of Gniben.

Sjaellands Rev (56°04'N., 11°15'E.) is a narrow and dangerous reef which extends NNW for about 5 miles from Gniben. It is divided into three parts by two rocky channels. Inderrevet, the inner part of the reef, extends N for about 2 miles from

Gniben; Mellemrevet, the central part, is very narrow and about 1 mile long; and Yderrevet, the outer part, is about 3 miles long and dries over a considerable length.

The sea breaks on all parts of this reef with the least wind and, in calm weather, its outline can be seen from a considerable distance due to the race showing on the side opposite to that which the current is flowing toward.



Sejero (Gniben) Light

Sjaellands Rev N Light (56°06'N., 11°12'E.), equipped with a racon, is shown from a prominent tower, 26m high, standing about 1 mile NNW of the N extremity of Sjaellands Rev. A refuge beacon and hut, 7m high, is situated on Yderrevet, about 1.8 miles SSE of the light.

Anchorage can be taken by large vessels, in depths of 20 to 25m, fine sand and cobbles, about 3 miles SW of Sjaellands Rev N Light.

Yderflak Light (56°04'N., 11°01'E.), situated 6.5 miles WSW of Sjaellands Rev N Light, is described in paragraph 8.40.

Caution.—Restricted areas, which may best be seen on the chart, lie centered 1.5 miles NE and 1.2 miles W of Gniben. Anchoring, fishing, or other seabed activities are prohibited in these areas due to the existence of bottom mines. A similar area fronts the S shore of Sjaellands Odde, 4 mile SE of Gniben.

Numerous wrecks, which may best be seen on the chart, lie off the coast between the entrance to The Sound and Sjaellands Rev.

A firing practice area is situated in the vicinity of Sjaellands Odde. It extends up to about 5.5 miles W, 5 miles N, and 11 miles E of Sjaellands Rev N Light. Targets may be anchored within firing practice areas at any time. Targets are marked with flashing white lights.

7.19 Sejero (Sejerøe) (55°53'N., 11°09'E.), a narrow island, lies 8 miles SW of Sjaellands Odde and is fringed by a shallow bank. It is located in the middle of Sejero Bugt, a large bay, which is entered between Sjaellands Rev and Rosnaes, 21 miles SW.

A light is shown from a prominent tower, 19m high, standing on Gniben, the N extremity of the island. A conspicuous

church is situated near the middle of the island. Kongshøj, a conspicuous hill, rises near the SE extremity of the island and is 30m high. Sejero Havn, a small harbor, is situated in the middle of the S side of the island. It is used only by local ferries, pleasure craft, and fishing vessels.

Sejero NW Rev, a bank with depths of less than 5m, extends NW for about 1 mile from the NW end of the island and is marked by a buoy. Sejero Puller, a detached shoal with a depth of 5.8m, lies about 1.5 miles NW of the NW extremity of the island and is the outermost danger in this vicinity.

Sejero SE Rev, a shallow bank, extends SE for about 2 miles from the SE extremity of the island and is marked by a buoy.

Sejero Bugt is navigable by large vessels and provides good anchorage, but it is little used. The NE side of the bay, S of Sjaellands Odde, is low. The land rises at Ordup Naes, a protruding cliffy point located 4.8 miles ESE of the S end of Sejero, where there are several hills. A chain of shoals, with depth of less than 5m, extends up to about 2.3 miles W of this point and is marked by a buoy.

Several conspicuous radio masts stand along the shore of the bay about 2 miles E of Ordup Naes. A prominent castle is situated at Dragshom, 4.5 miles S of Ordup Naes. A conspicuous television mast, with an aeronautical light, stands at Jyderup (55°41.1'N., 11°27.8'E.), about 5.8 miles SSE of the castle.

The S side of Sejero Bugt is low and woodless in the E part, but rises near the peninsula of Rosnaes. Nekselo, a hilly and woodless island, lies 4.3 miles SW of Ordup Naes and its S end is connected to the shore of the bay by a ridge which nearly dries. A detached shoal, with a depth of 3.8m, lies 1.4 miles N of the N end of this island.

Depths—Limitations.—The port can accommodate vessels up to 48.7m in length and 2.6m draft. For berthing information see the table titled **Sejero—Berth Information**.

Sejero—Berth Information				
Berth	Length	Maximum Vessel		Remarks
		LOA	Draft	
Sejero Bay Ferry Terminal				
Nekselofaergen Ferry	—	48.7m	2.6m	Ro/pax.
Sejerofaergen Ferry	15m	48.7m	2.6m	Ro/pax.

Havnso Havn, a small and shallow harbor, lies on the S shore of the bay, 5.5 miles SSW of Ordup Naes. It is used only by fishing vessels, pleasure craft, and local ferries. A conspicuous windmill stands close W of the harbor.

Leveret (55°53'N., 11°00'E.), a chain of detached shoals, lies with its NW end located about 4.8 miles WSW of Sejero (Gniben) Light. This chain extends about 7 miles SE and the shoal patches have depths of 5.6 to 9.3m.

Information concerning the Samsø Baelte and the dangers lying W of Sjaellands Odde and Sejero is given beginning in paragraph 8.39.

7.20 Rosnaes (55°45'N., 10°52'E.), the SW entrance point

of Sejero Bugt, is the NE entrance point of the Store Baelte. This peninsula rises to barren hills, 60m high, and terminates in a narrow point faced with cliffs, 10m high. Rosnaes Rev, a shallow reef, fronts the point and extends up to about 0.5 mile seaward.

Rosnaes Light (55°45'N., 10°52'E.) is shown from a prominent tower, 15m high, standing at the W extremity of Rosnaes.

A small fishing harbor is situated on the N shore of the peninsula, 2.5 miles E of the light. The entrance, 16m wide, faces SE and has a controlling depth of 2.8m.



By cisko66 [CC BY 3.0 (<https://creativecommons.org/licenses/by/3.0/>)], via Wikimedia Commons

Rosnaes Light

Rosnaes Puller (55°45'N., 10°51'E.), a reef with large rocks, lies about 1.3 miles W of Rosnaes. A narrow channel, with a depth of 6.4m, leads between the inner side of this reef and the W extremity of Rosnaes Rev.

Rosnaes Puller Light (55°45'N., 10°51'E.) is shown from a prominent mast on a granite base, 9m high, standing on the NW part of the reef.

For information concerning the Store Baelte and the waters lying S of Rosnaes Puller Light, see Sector 2 of Pub. 194, Sailing Directions (Enroute) Baltic Sea (Southern Part).

Caution.—A restricted area, which may best be seen on the chart, lies close S of the S end of Sejero. Anchoring, fishing, or other seabed activities are prohibited in this area due to the existence of bottom mines.

A firing practice area fronts the S shore of Sejero Bugt and extends up to 8.5 miles W of Nekselo.

7.21 Isefjord (55°56'N., 11°48'E.) is entered between Spodsbjerg Light and Korshage, 2.5 miles W, which have been previously described in paragraph 7.17. This inlet extends S for about 15 miles and is divided into Yderbredning and Inderbredning.

Isefjord, is a commercial port with ferries to Rorvig and handles bulk and Ro-Ro cargo. There is a fishing harbor and cruise ship berths in the port as well.

The entrance is obstructed by sand banks which may best be seen on the chart. Three channels lead across these banks. The approach route leads SSE and S from a position located 4 miles NNW of Spodsbjerg Light. The main channel leads in a S di-

rection and is entered about 0.5 mile W of the light.

The W side of the entrance, between Korshage and Skansehage, 2 miles SSE, is low, sandy, and covered with dunes. The E side of the entrance is formed by the NW side of the Halsnaes Peninsula.

Yderbredning, an extensive basin, lies S of the entrance and has general depths of 8 to 9.5m. It extends S for about 8 miles to the island of Oro. Interbredning, the inner part of the fjord, extends about 3 miles S from the reef fronting the S end of Oro. It has general depths of 6 to 7.7m.

Oro Ostre Lob, an unmarked channel, leads E of Oro. It is shallow and narrow in places. Oro Vestre Lob, the main channel, leads W of Oro and is marked by sector lights.

A cable ferry steered by two steel cables connected to the ferry piers, operates across the S part of Oro Ostre Lob from Hammer Bakke (55°45.3'N., 11°51.1'E.). While the ferry is berthed the cables rest on the sea bed and passage is unhindered. While the ferry is crossing the cables are gradually raised from the seabed before gradually falling again astern of the ferry. Since the cables are closer to the surface of the sea ahead of the direction of travel it is important to give a wide berth and pass at a prudent distance astern of the ferry.

Tides—Currents.—The range of tide in Isefjord is about 0.2m. During calm weather, the ebb and flood currents are weak and occur at regular intervals. In N or S storms, the currents may set in the same direction for 18 hours or longer and attain rates up to 1.5 knots in the entrance channels.

Storms may cause abnormal water levels in the harbors located within the fjord. The levels may be increased by up to 1.8m or reduced by as much as 1.2m.

Depths—Limitations.—The main entrance channel, which is 70m wide, is dredged to a least depth of 6.4m (1999).

Oro Vestre Lob, the main channel leading W of Oro, has depths of 6.2 to 15m in the fairway.

Aspect.—An outer approach lighted buoy is moored about 1.4 miles NNW of Spodsbjerg Light. The main entrance channel is marked by buoys and lighted buoys.

Pilotage.—Pilotage is compulsory in the fjord for all tankers. Pilots can be contacted by VHF and board in position (55°59.8'N., 11°51.0'E.) for vessels bound for Hundested and ports in Isefjord. For further information, see Pilotage in paragraph 7.1.

Regulations.—In the main entrance channel and in the approaches to the harbors located within Isefjord, outbound vessels must give way to inbound vessels.

Caution.—A cable ferry, steered by two steel cables connected to the ferry piers, operates across the southern part of Oro Ostre Lob from Hammer Bakke (55°45.3'N., 11°51.1'E.). While the ferry is berthed the cables rest on the seabed and passage for other vessels is unhindered. Caution must be taken when the ferry is crossing and the cables are raised from the seabed before falling again astern of the ferry. It should be noted that the cables are closer to the surface ahead of the ferry in the direction of travel. It is important to pass astern of the ferry affording a wide berth and keeping a prudent distance.

Several practice firing areas, used by the Danish Navy, are situated within Isefjord. Special regulations are in force and warning lights are shown when the areas are in use.

Fish traps are laid out over the shoals lying W of the entrance to Isefjord annually from March to June.

A submarine cable extends across the entrance to Isefjord and may best be seen on the chart.

Due to the entrance being subject to silting and unmarked shoals lying within Yderbredning, local knowledge is required.

7.22 Hundested Havn (55°58'N., 11°51'E.) (World Port Index No. 29390), a small port, lies on the E side of the entrance to Isefjord, 0.8 mile SSW of Spodsbjerg Light.

Port of Hundested
https://portofhusteded.com/info

Depths—Limitations.—The old harbor Yderhavn, used by fishing boats and small commercial vessels, and the ferry harbor are protected by two moles. For berthing information see the table titled **Husteded Havn—Berth Information**. The harbors are subject to silting.

Husteded Havn—Berth Information			
Berth	Length	Depth	Remarks
Husteded Havn Terminal			
Bulk	320m	8.2m	Wood chips and breakbulk.
Cruise	260m	8.2m	Aggregates, bulk cargo, cruise, and breakbulk.
Warehouse	315m	7.0m	Breakbulk and reefer.

Pilotage.—Pilotage is compulsory for tankers arriving at and departing from Hundested.

The pilot boards about 0.35 mile N of the lighted safe water buoy in position 56°00.0'N, 11°51.0'E, for vessels bound for Hundested and ports in Isefjord.

Contact Information.—See the table titled **Husteded—Contact Information**.

Husteded—Contact Information	
Port	
VHF	VHF channels 12, 13, and 16
Telephone	45-47-937234
E-mail	mail@hustededhavn.dk
Web site	https://www.hustededhavn.dk

Lynaes Havn (55°57'N., 11°52'E.), a small fishing harbor, lies near the SW extremity of Halsnaes, 1.4 miles S of Hundested Havn. It is protected by two breakwaters and has a controlling depth of 3m.

Rorvig Havn (55°57'N., 11°46'E.), a small harbor, lies at the W side of the entrance, 3.5 miles W of Lynaes Havn. It has a controlling depth of 3m and is used by fishing vessels and local ferries. A church and a wind mill, both prominent, stand about 1.2 miles W and 0.6 mile SW, respectively, of the harbor.

Nykobing Havn (55°55'N., 11°41'E.), a small harbor, lies at



Hundested Harbor

the NW side of Yderbredning, 3.5 miles WSW of Rorvig Havn. It has a controlling depth of 3m and is mainly used by pleasure boats and small craft. Vessels up to 50m in length, 10m beam, and 2.7m draft can enter. A conspicuous church stands in the town 0.8 mile N of the harbor. For pilotage information, see Pilotage in paragraph 7.1.

7.23 Kyndbyvaerkets (Kyndby Vaerkets) (55°49'N., 11°53'E.), a small harbor, is located at the SE end of Yderbredning and serves a large power station. Vessels up to 40,000 dwt, with a maximum length of 250m, a maximum draft of 6m, and a maximum beam of 40m, can be accommodated. Kyndby, the main quay, is 174m in length and has a depth of 6.6m alongside. The quay is protected by a breakwater and handles chemicals and general cargo. The approach to the harbor is indicated by a lighted range.

A number of conspicuous chimneys stand at the power station, close E of the harbor. Three prominent wind generators are situated near the shore 0.5 mile NE of the harbor. The conspicuous tower of an ancient palace stands at Jaegerspris, 4.3 miles NE of the harbor.

Holbaek (55°43'N., 11°43'E.) (World Port Index No. 29400), a small port, lies about midway along the S side of Holbaek Fjord, which extends 4 miles W from the NW side of Inderbrenning. The shores in this vicinity are almost treeless. The town itself extends along a considerable part of the S shore of the fjord.

Shallow banks extend from both sides of the fjord. A channel, marked by buoys and indicated by a lighted range, leads WSW to the harbor. It is 30m wide and dredged to a depth of 6.4m. The main commercial quay is 530m long and has depths of 2.6 to 6.4m alongside. Vessels up to 110m in length and 6m



Kyndbyvaerkets

draft can be accommodated.

7.24 Roskilde Fjord (55°56'N., 12°00'E.) leads from Isfjord, through Kulhus Rende, along the S side of the Halsnaes Peninsula. This inlet, which is narrow, extends about 5 miles E and then 18 miles S to the city of Roskilde, at its head.

Frederiksvaerk (55°58'N., 12°01'E.) (World Port Index No. 29415) is situated at the NE end of Roskilde Fjord. The port consists of Stalvalsevaerks Havn, which serves a steel mill, and Frederiksvaerk Gamle Havn, the old harbor, which is disused.

Stalvalsevaerks Havn, a basin, is protected by two short breakwaters. The entrance channel is 40m wide and has a con-



Frederiksvaerk

trolling depth of 6m. The basin provides about 1,100m of berthage, with a depth of 6m alongside. Vessels up to 130m in length, 40m beam, and 5.8m draft can be accommodated.

The **Kronprins Frederiks Bridge** (55°51'N., 12°02'E.) carries both road and rail traffic across the fjord about 7.5 miles S of Frederiksvaerk. It is supported by three pillars, with a movable double-bascule section at the E side. The bascules provide a passage of 21.6m wide when open and 29.8m wide when closed. The vertical clearance when closed is 3.1m.

For information on pilotage, see Pilotage in paragraph 7.1.

Contact Information.—See the table titled **Frederiksvaerk—Contact Information**.

Frederiksvaerk—Contact Information	
Port	
VHF	VHF channels 9, 12, and 16
Telephone	45-47-782485
	45-23-245179
E-mail	info@dansteel.dk
	mdj@nlmk.com (Shipping Manager)
Web site	http://www.dansteel.dk

Caution—Depths of 2.7m have been reported in the channel between 0.1 mile and 0.6 miles N of Kronprins Frederiks Bridge.

7.25 Frederikssund (55°50'N., 12°03'E.) (World Port Index No. 29410) is situated close S of the Kronprins Frederiks Bridge. The harbor consists of four basins and is protected by a breakwater. The entrance is 50m wide and has a controlling depth of 4.2m. Nyhavn, the main commercial basin, has a berth, 200m long, with depths of 5.6 to 5.8m alongside. Vessels up to about 4,000 dwt and 4m draft can be accommodated.

An overhead power cable spans the channel about 2 miles S of Frederikssund and has a vertical clearance of 22m.

For information on pilotage, see Pilotage in paragraph 7.1.

Contact Information.—See the table titled **Frederikssund—Contact Information**.

Frederikssund—Contact Information	
Port	
VHF	VHF channels 12, 13, and 16
Telephone	45-47-385503
Facsimile	45-47-388590
E-mail	havnefogeden@frederikssundlystbaadehaven.dk
Kronprins Frederiks Bridge	
VHF	VHF channels 9 and 16
Telephone	45-47-310147


Roskilde (55°39'N., 12°05'E.) is situated at the head of the fjord. The channel above Frederikssund is shallow and only pleasure boats and small craft can reach this small harbor.

Additional pilotage requirements may be stated along with each port description.

Pilots should be ordered by inbound vessels at least 18 hours prior to the ETA at the boarding station. A confirmation or correction should then be sent 4 hours before arrival.

Vessels should state the following when ordering the pilot:

1. Vessel name, call sign, and IMO number.
2. Gross tons, length, beam, draft, and speed.
3. Nature of cargo.
4. ETA at boarding position.
5. Destination for pilotage.
6. Any faults affecting maneuverability.
7. Contact and payment information.
8. Payer's information.

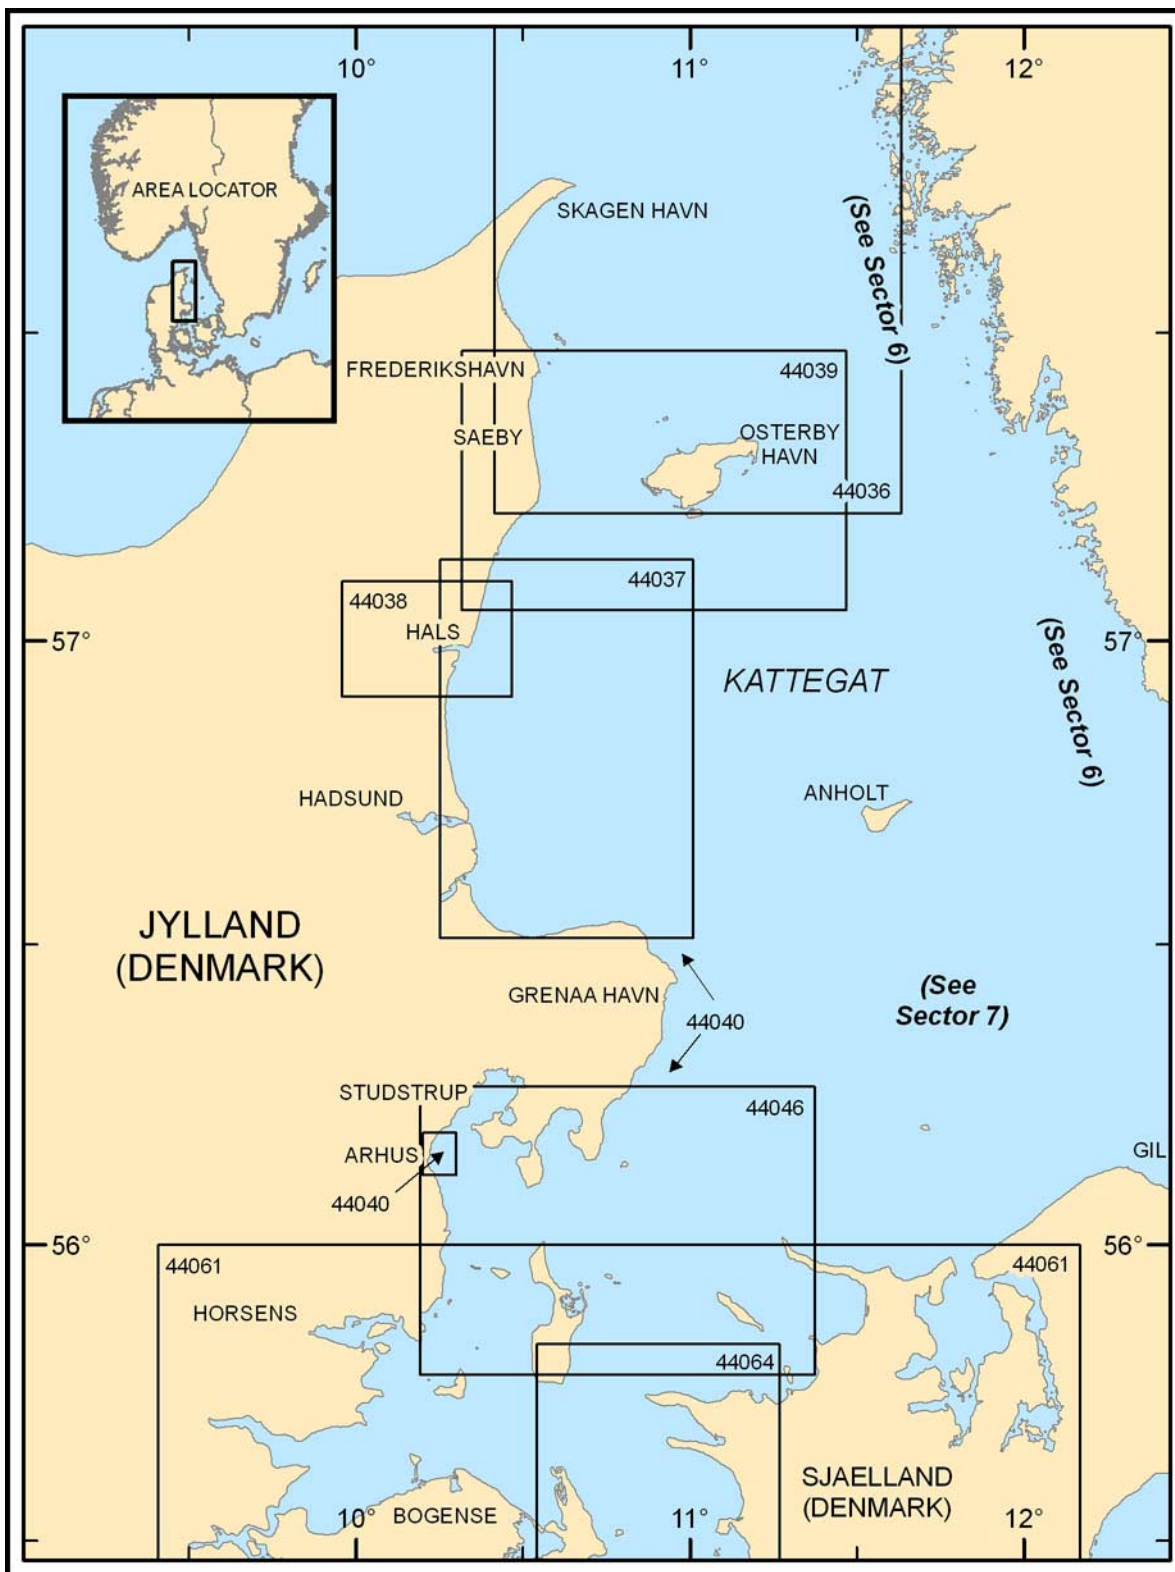

Additional chart coverage may be found in NGA/DLIS Catalog of Maps, Charts, and Related Products (Unlimited Distribution).

SECTOR 8 — CHART INFORMATION

SECTOR 8

DENMARK—EAST COAST—SKAGEN TO BJORNSKNUDE

Plan.—This sector describes the E coast of Jylland (Denmark) from Skagen to Bjornsknude, at the entrance to the Lille Baelt. The descriptive sequence is from N to S.

General Remarks

8.1 The E coast of Jylland is generally low, flat, and sandy. It is indented by several fjords and some hills rise inland. Limfjorden (57°00'N., 10°19'E.) leads W from the Kattegat to the North Sea. It consists of a number of lakes connected by narrow passages. This waterway has a depth of 4m and can only be used by small craft.

The principal commercial ports located on the E coast of Jylland, from N to S, are Frederikshavn, Alborg, Aarhus, and Horsens.

That part of the Kattegat lying W of a line connecting Laeso (57°17'N., 11°00'E.) and Fornaes Light, 47 miles S, is known as Alborg Bugt.

For information concerning ice, pilotage, and Route B, which leads S through this area, see paragraph 7.1 and paragraph 7.8.

For information concerning danger areas and related subjects related to the waters covered by this sector, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas.

Tides—Currents.—The currents off this coast are seasonal and not easy to predict. However, at times, the currents can attain considerable strength.

The tidal range along this coast is negligible. Consequently, the tidal currents, except within the fjords, are weak, variable, and depend largely on the effects of the wind. Tidal currents, where relevant, are described with each port.

Pilotage.—For information concerning pilotage in Danish waters, see Pilotage in paragraph 7.1.

Caution.—Several mine danger areas, which may best be seen on the chart, lie within the Kattegat. Anchoring, fishing, and any other seabed activities are prohibited in these areas. The risks to surface navigation in the areas are considered to be no more than the normal marine hazard.

Skagen to Limfjorden

8.2 Skagen (57°44'N., 10°37'E.), also known as The Skaw, forms the NE extremity of Jylland and is fully described in paragraph 7.7.

Albaek Bugt (57°35'N., 10°33'E.) indents the coast between Skagen and Frederikshavn, about 19 miles SSW. The N part of this bight consists of sand hills backed by low land but cultivated fields and numerous buildings are situated along the S part. Woods are located in the vicinity of Frederikshavn. Depths of 18 to 23m lie within the central part of this bight and shoal gradually toward its head.

Vessels can anchor in the N part of Albaek Bugt, in regular depths of less than 20m. The bottom is sand with good holding ground. In depths of over 20m, the holding ground is not good because the bottom is hard in places.

8.3 Skagen Havn (57°43'N., 10°36'E.) (World Port Index No. 30440), is situated in the N part of Albaek Bugt, about 2 miles SW of the NE extremity of Skagen. The harbor is primarily a fishing port with associated industries, but has recently undergone substantial expansion, attracting cruise liners and larger cargo vessels. Further expansion in (2020) includes an extension to the western breakwater and land reclamation to seaward of the eastern breakwater.

Skagen Havn Home Page

<https://www.skagenhavn.dk/en/frontpage>

Tides—Currents.—The tidal range is 0.3m. Strong winds from W may raise the water level by up to 1.4m and winds from E may lower it by as much as 0.9m. Winds from between W and SSW may cause a NE current and those from between N and SSE may cause a SW current. The prevailing current runs NE across the harbor entrance at rates up to 2 knots.

Depths—Limitations.—The harbor has nine basins and is protected by two long breakwaters. The entrance channel and outer part of the harbor have been dredged to 11 to 15m. Osthavn has dredged depths of 7 to 11m. Vesthavn has dredged depths of 3 to 7m. The harbor and entrance are subject to silting; contact the local authorities for the latest information.

Vessels up to 10,759 dwt, 400m in length, 10.5m draft and 39.8m beam can be accommodated. A new 600m long pier has been built (2022). For further information, see the table titled **Port of Skagen—Berth Information**.

Development works in progress (2019) to expand the port seaward of the E outer breakwater. The work is expected to be completed in 2021. Unauthorized entry into work area, marked by special lighted and unlighted buoys is prohibited.

Port of Skagen—Berth Information

Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
Ostbassin Terminal 1					
No. 1	180m	8m.0	120m	—	Seafood, chemicals, and fish oils.

Port of Skagen—Berth Information					
Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
No. 2	140m	9.0m	—	—	Seafood, chemicals, and fish oils.
No. 3	160m	9.0m	120m	—	Seafood, chemicals, and fish oils.
Ostbassin Terminal 2					
No. 4	270m	9.0m	120m	—	Seafood, chemicals, bunkering, petroleum products, refrigerated cargo, and fish oils.
No. 5	270m	9.0m	—	—	Seafood, chemicals, petroleum products, refrigerated cargo, and fish oils.
No. 6	150m	7.0m	—	—	Seafood, chemicals, and fish oils.
No. 7	270m	9.0m	—	—	Seafood, chemicals, palletized cargo, and fish oils.
No. 8	35m	9.0m	—	—	Seafood and palletized cargo.
Auktionshal I Terminal					
No. 15	70m	7.0m	—	—	Passengers.
Auktionshal II Terminal					
No. 16	180m	5.0m	—	—	—
Auktions-bassin Terminal					
No. 17	100m	5.0m	—	—	Seafood.
No. 18	254m	5.0m	—	—	Seafood, chemicals, and fish oils.
GL Pier Terminal					
No. 14	114m	7.0m	114m	6.5m	Seafood and cruise vessels.
Mellebassin Terminal					
No. 13	290m	7.0m	—	—	Seafood and general cargo.
Vestrebassin Terminal					
No. 11	170m	5.0m	—	—	Seafood.
No. 12	223m	6.0m	—	—	Seafood.
Bundgarns-bassin Terminal					
No. 9	500m	10.5m	400m	9.0m	Seafood, chemicals, and cruise vessels.
No. 10	190m	9.0m	220m	8.5m	Seafood, chemicals, and cruise vessels.

Aspect.—The entrance channel is indicated by a lighted range. A conspicuous church stands 1.3 miles WSW of the harbor. For more information concerning landmarks and aids in this vicinity, see paragraph 7.7.

Pilotage.—Deep Sea (Transit) Pilots are available from Skagen (Skaw Pilot). For more information, see paragraph 7.1 and paragraph 7.8.

Pilot station accepts requests for Deep Sea Pilots for the North Sea, Kattegat and Skagerrak. Vessels should send requests 24 hours in advance.

Pilots for the local harbor can be contacted by VHF and board about 0.8 mile SE of the entrance. For further information, see Pilotage in paragraph 7.1.

Pilot boards in the following positions:

1. Deep Sea/Transit pilotage (Skaw Pilot):
 - a. Skagen 1—57°47.5'N, 10°46.0'E.

- b. Skagen 2—57°44.0'N, 10°46.0'E.

- c. Skagen 3—57°49.0'N, 10°46.0'E.

- d. Skagen 4—57°44.0'N, 10°52.0'E.

2. Harbor Pilots—57°42.7'N, 10°38.8'E.

Regulations.—Outbound vessels must give way to inbound vessels. Speed limit in the harbor is restricted to 4 knots.

In order not to impede vessels arriving or departing, fishing is prohibited within 700m of the harbor entrance.


Traffic Separation Scheme Skagen West, best seen on the chart, entrance lies 7 miles N of Skagen.

The maximum speed limit within the outer harbor is 3 knots.

Contact Information.—See the table titled **Skagen—Contact Information.**

Anchorage.—Vessels can anchor, in depths of 14 to 17m, off the harbor entrance.

Caution.—It is reported (1998) that vessels entering the

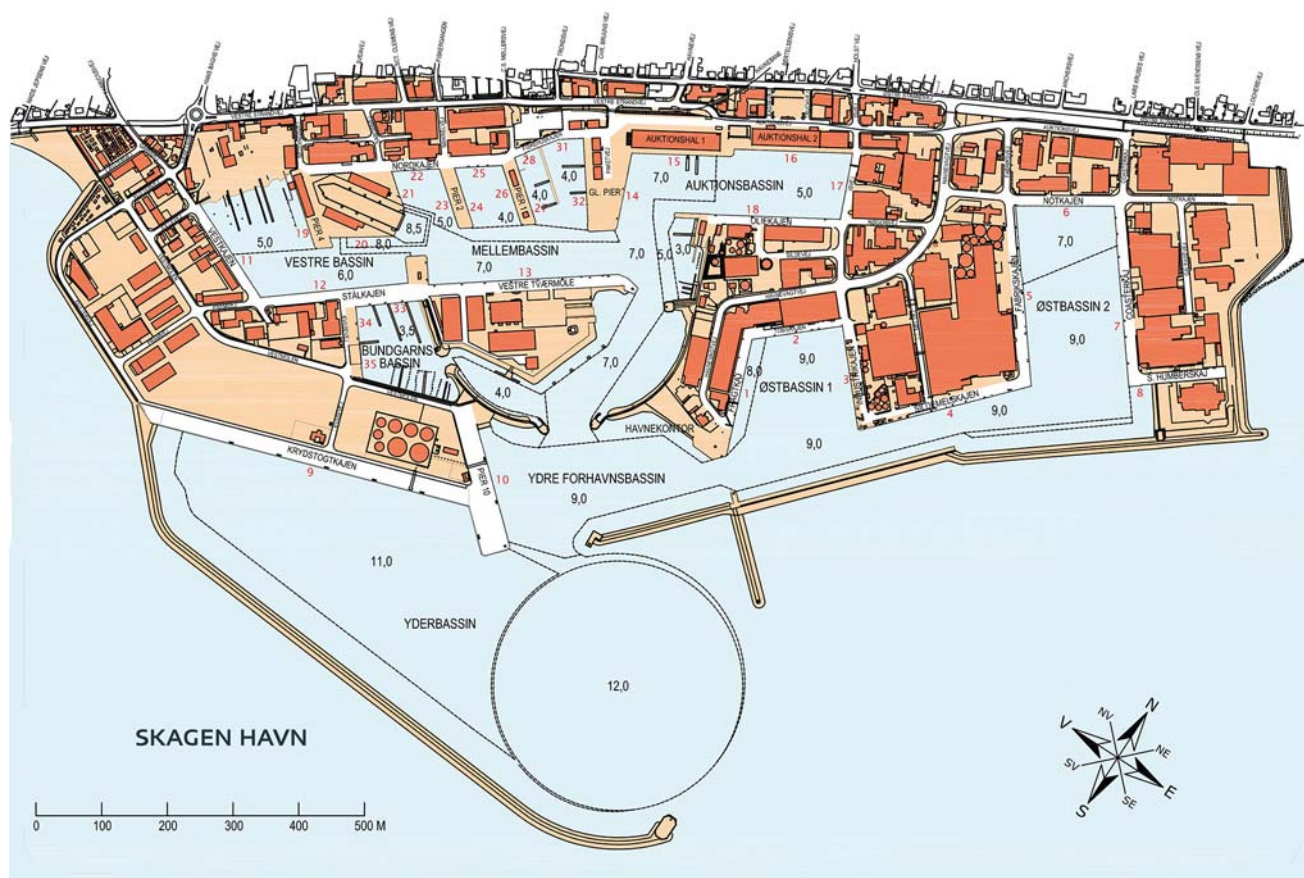

Skagen Havn



Skagen Havn

westernmost inner basin are limited to an air draft of 27m.

Skagen—Contact Information	
Port	
VHF	VHF channels 12 and 16

Skagen—Contact Information

Telephone	45-98-441-346
Facsimile	45-98-450-338
E-mail	lv@skagenhavn.dk
Web site	https://www.skagenhavn.dk
Pilots	
Call sign	DanPilot Skaw/Skagen
VHF	VHF channels 16 and 87
Telephone	45-63-256666
E-mail	danpilot@danpilot.dk
Web site	https://www.danpilot.dk

8.4 Albaek Havn (57°36'N., 10°26'E.), a small craft harbor, is located in the central part of Albaek Bugt, 9 miles SSW of Skagen Havn. It consists of two basin and has depths of 2 to 3.2m. A conspicuous church, with a red pointed tower, stands in the town.

Prominent churches are situated at Hulsig and Jersup, which are located 4 miles NNE and 4 miles S, respectively, of Albaek Havn.

Krageskov Rev (57°33'N., 10°28'E.), a group of three rocky shoals, lies about 1.2 miles offshore, 3 miles SSE of Albaek Havn. These detached patches have depths of 3.4 to 5.3m.

Strandby Havn (57°30'N., 10°30'E.), a small fishing harbor, lies 6.2 miles SSE of Albaek Havn and is protected by two breakwaters. The entrance channel is 50m wide and has a least depth of 4m. Vessels up to 50m in length, 10m beam, and 3.5m draft can enter.

A conspicuous church, with a tower, stands at Elling, 1.4 miles SSW of Strandby Havn.

Hirsholmene (57°29'N., 10°38'E.) consists of several rocky islets and two low islands, Hirsholm and Graesholm. This group lies 3.5 miles E of Strandby Havn near the edge of the coastal bank. Both islands are flat and devoid of trees. A small boat harbor is located at the SW side of Hirsholm, the south-eastern-most island. A shallow shoal flat, marked by buoys, extends WSW from this group to the coast.

A light is shown from a prominent tower, 27m high, standing on the summit of Hirsholm. Foul ground extends up to about 1.4 miles NNW and 0.5 mile NE of the light and is marked by buoys.

Caution.—A restricted area, which may best be seen on the chart, fronts the coast S of Albaek Havn and extends up to about 7 miles seaward. Anchoring, fishing, or other seabed activities are prohibited in this area due to the existence of bottom mines.

From May to November, mooring buoys, for the use of small craft, are situated about 2 miles NW and 0.7 mile S of Hirsholm Light.

The waters in the vicinity of Hirsholm are designated as a nature reserve area. Special regulations apply to vessels navigating, fishing, and anchoring within this area.

Frederikshavn (57°26'N., 10°33'E.)

World Port Index No. 30430

8.5 Frederikshavn, an ice-free port, is situated 18 miles S of Skagen and is protected by breakwaters. The harbor, which is used by commercial vessels, the offshore oil service industry, and fishing boats, is also a naval base. The port continues to undergo major land reclamation and port expansion efforts (2020).

Tides—Currents.—The tidal range is about 0.3m. During gales from W the water level may be increased by up to 1.2m and during gales from E the level may be reduced by as much as 0.8m.

The current sets directly across the harbor entrance, depending on the wind, and may exceed a rate of 2 knots at times.

Depths—Limitations.—Foul ground, shallow shoals, and rocks awash extend up to about 1.7 miles NE, 1.4 miles E, and 1.2 miles ESE of the harbor entrance and may best be seen on the chart. A secondary approach channel, indicated by the white sector of the N breakwater light, leads W through these dangers, which are marked by buoys, and has a least depth of 6.9m.

The main approach channel leads NW and passes SW of these dangers. This channel, along with the greater part of the outer harbor, has a dredged depth of 14m; however, the maximum allowable draft is presently 8m.

The North Harbor basin and Traffic Harbor basin provide about 4,800m of total quayage. Facilities for fishing vessels are situated at the NW side of North Harbor. The recently expanded main quay in this basin lies on the E side and has a depth of 14m between berths No. 90 and Berth No. 102.

The Traffic Harbor basin has more than a dozen berths with a depth of 8m alongside. An oil berth is situated at the SE side of this basin.

The Ferry Harbor basin provides four berths with depths. The naval base is located just S of the Ferry Harbor.

Anchoring is prohibited at Ferry Berths 2 and 3. Anchoring, fishing, and seabed operations are prohibited 2.5 miles SE and 3 miles E of Frederikshavn, in areas with a radius of 100m, due to the presence of underwater obstructions.

The harbor can accommodate vessel up to 35,692 dwt, 186.9m in length, 14m in draft, and 27.4m beam.

Entry is prohibited into an area, marked by a special lighted buoy 3 miles SE of Frederikshavn, centered on position 57°23'34.2"N, 10°37'03.0"E. Entry is prohibited into an area, marked by special buoys surrounding the N mole in position 57°26'09.0"N, 10°33'13.8"E.

For berthing information see the table tilted **Frederikshavn—Berthing Information**.

Frederikshavn—Berthing Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
Ferry Harbor							
No. 2	150m	7.6m	129.9m	—	23.4m	3,365 dwt	Ro/pax, ro-ro freight, and bunkers.
No. 3	185m	7.6m	182.3m	—	28.0m	6,559 dwt	Ro/pax, ro-ro freight, and bunkers.
No. 4	175m	7.5m	178.4m	—	29.6m	2,800 dwt	Ro/pax, ro-ro freight, and bunkers.
No. 5	—	6.4m	—	—	—	—	Ro/pax, ro-ro freight, and bunkers. Continuous berthing length of 136m. Closed due to no commercial activity in recent years.
No. 6	—	6.4m	—	—	—	—	Ro/pax, ro-ro freight, and bunkers. Continuous berthing length of 136m. Closed due to no commercial activity in recent years.

Frederikshavn—Berthing Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
New Pier							
No. 31-33	200m	9.5m	—	—	—	—	Under construction (2022). Bunkers.
North Harbor							
No. 44	80m	7.0m	99.9m	—	13.8m	3,700 dwt	Breakbulk and bunkers.
No. 45	—	7.0m	132.5m	—	24.0m	9,566 dwt	Continuous berthing length: 180m. Scrap metal and bunkers. Large vessels will taken up mooring space between berth No. 45-47.
No. 46	—	5.0m	132.5m	—	24.0m	9,566 dwt	
No. 47	—	4.0m	132.5m	—	24.0m	9,566 dwt	
No. 48	—	4.5m	63m	—	12.0m	1,300 dwt	Continuous berthing length: 160m. Breakbulk and bunkers. Large vessels will taken up mooring space between berth No. 48-50.
No. 49	—	4.5m	63m	—	12.0m	1,300 dwt	
No. 50	—	4.5m	63m	—	12.0m	1,300 dwt	
No. 52	—	7.0m	112.7m	—	16.0m	6,460 dwt	Continuous berthing length: 122m. Cement, ro-ro/lo-lo, breakbulk, and bunkers. Large vessel will taken up mooring space between berth No. 52 and 53.
No. 53	—	7.0m	112.7m	—	16.0m	6,460 dwt	Continuous berthing length: 122m. Cement, breakbulk, and bunkers. Large vessel will taken up mooring space between berth No. 52 and 53.
No. 62	—	7.0m	116m	—	15.8m	7,588 dwt	Continuous berthing length: 130m. Aggregates, sand, breakbulk, and bunkers. Large vessels will take up mooring space between berth No. 62 and 63.
No. 63	—	7.0m	116m	—	15.8m	7,588 dwt	
No. 79	—	5.0m	89.9m	—	12.5m	3,234 dwt	Continuous berthing length: 644m. Steel products, breakbulk, and bunkers. Large vessels will take up mooring space along the adjacent berth.
No. 80	—	5.0m	89.9m	—	12.5m	3,234 dwt	
No. 81	—	5.0m	89.9m	—	12.5m	3,234 dwt	Continuous berthing length: 644m. Bunkers. Large vessels will take up mooring space along the adjacent berth.
No. 82	—	7.0m	108.7m	—	21.5m	5,817 dwt	Continuous berthing length: 644m. Steel products, breakbulk, and bunkers. Large vessels will take up mooring space along the adjacent berth.
No. 83	—	7.0m	130m	—	24.9m	10,238 dwt	Continuous berthing length: 644m. Aggregates, project/heavy, steel products, breakbulk, and bunkers. Large vessels will take up mooring space along the adjacent berth.
No. 84	—	7.0m	130m	—	24.9m	10,238 dwt	Continuous berthing length: 644m. Aggregates, scrap metal, project/heavy, steel products, breakbulk, and bunkers. Large vessels will take up mooring space along the adjacent berth.
No. 85	—	7.0m	112.7m	—	15.2m	6,460 dwt	Continuous berthing length: 644m. Scrap metal, breakbulk, and bunkers. Large vessels will take up mooring space along the adjacent berth.

Frederikshavn—Berthing Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
No. 86	—	7.0m	113.7m	—	15.2m	6,100 dwt	Continuous berthing length: 644m. Aggregates, breakbulk, and bunkers. Large vessels will take up mooring space along the adjacent berth.
No. 87	—	7.0m	110.7m	—	22.0m	6,000 dwt	Continuous berthing length: 644m. Aggregates, project/heavy, steel products, breakbulk, and bunkers. Large vessels will take up mooring space along the adjacent berth.
No. 88	—	8.0m	175.6m	—	26.0m	33,169 dwt	Continuous berthing length: 644m. Aggregates, offshore, project/heavy, steel products, breakbulk, and bunkers. Large vessels will take up mooring space along the adjacent berth.
Traffic Harbor							
No. 21	—	8.0m	145.6m	—	18.2m	10,508 dwt	Continuous berthing length: 212m. Breakbulk and bunkers. Large vessels will take up mooring space along the adjacent berth.
No. 22	—	8.0m	145.6m	—	18.2m	10,508 dwt	Continuous berthing length: 212m. Fishing, breakbulk, and bunkers. Large vessels will take up mooring space along the adjacent berth.
No. 23	—	8.0m	145.6m	—	18.2m	10,508 dwt	Continuous berthing length: 212m. Fishing, breakbulk, and bunkers. Large vessels will take up mooring space along the adjacent berth.
No. 24	80m	8.0m	89.9m	—	13.7m	3,332 dwt	Breakbulk and bunkers.
No. 26	—	8.0m	—	—	—	—	Continuous berthing length: 265m. Ro-ro passengers/vehicles/rails, offshore, breakbulk and bunkers. Berth also used for mooring offshore units.
No. 27	—	8.0m	—	—	—	—	Continuous berthing length: 265m. Offshore, breakbulk and bunkers. Berth also used for mooring offshore units.
No. 28	—	8.0m	79m	—	10.2m	1,601 dwt	Continuous berthing length: 265m. Breakbulk and bunkers.
New Harbor							
No. 90	—	14.0m	175.6m	—	26.0m	33,173 dwt	Continuous berthing length: 280m. Aggregates, fertilizer, others, bulk corn, feedstuffs, offshore vessels, project/heavy cargo, steel products, breakbulk, and bunkers. Used for mooring offshore units. Larger vessels will take mooring space between Berth No. 90-93.
No. 91	—	14.0m	175.6m	—	26.0m	33,173 dwt	
No. 92	—	14.0m	175.6m	—	26.0m	33,173 dwt	
No. 93	—	14.0m	175.6m	—	26.0m	33,173 dwt	

Frederikshavn—Berthing Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
No. 94	—	14.0m	175.6m	—	26.0m	33,173 dwt	Continuous berthing length: 150m. Aggregates, fertilizer, bulk corn, feedstuffs, others, offshore, project/heavy cargo, steel products, multipurpose, and bunkers. Used for mooring offshore units. Larger vessels will take mooring space between Berth No. 94 and 95.
No. 95	—	14.0m	175.6m	—	26.0m	33,173 dwt	Continuous berthing length of 150m. Aggregates, fertilizer, bulk corn, feedstuffs, others, offshore, project/heavy cargo, steel products, breakbulk, and bunkers. Used for mooring offshore units. Larger vessels will take mooring space between Berth No. 94 and 95.
No. 96-102 (Stena Oil)	—	14.0m	186.9m	14.0m	27.4m	35,692 dwt	Continuous berthing length of 450m. Bio fuels, petroleum products, bulk corn, feed stuff, aggregates, fertilizer, others, offshore, project/heavy, multipurpose, and bunkers. Used to mooring offshore units. Berth No. 99-102 mainly used for bunkering of all grades of marine fuel and discharged of slops and sludge. Large vessel will take up mooring space between Berth No. 96-102.
Oil Terminal							
No. 29-30	188m	8.0m	180m	7.5.0m	23.7m	19,884 dwt	Petroleum products, breakbulk, multipurpose, and bunkers. Berth also used for bunkering.

Aspect.—An outer approach lighted buoy, equipped with a racon, is moored about 1.8 miles SE of the harbor entrance. Lights are shown from both breakwater heads. The main approach channel is indicated by a lighted range, which may best be seen on the chart.

A conspicuous church, with a tower and spire, is situated in the town near the harbor. A conspicuous church, with a tower, stands at an elevation of 111m at Flade, about 2.8 miles WSW of the harbor.

Pilotage.—Pilots can be contacted by VHF and board about 1 mile SE of the outer approach lighted buoy.

For further information, see Pilotage in paragraph 7.1.

Regulations.—Vessels must report to the harbor office by VHF on arrival.

Vessels entering the harbor must give way to vessels leaving. Vessels leaving or entering the naval base or the fishing harbor must give way to ships entering or leaving the commercial harbor.

All vessels must report to Port Control at arrival and 15 minutes before departure or berth shift. Report may be made on VHF channel 16.

Speed limits of 12 knots apply within the harbor limits outside the breakwaters, 7 knots in the outer harbor, and 3 knots elsewhere in the harbor. In unfavorable weather, greater speeds

can be used if necessary for the safe maneuvering of the vessel.

Contact Information.—See the table titled **Frederikshavn—Contact Information**.

Frederikshavn—Contact Information	
Port	
Call sign	Port Control
VHF	VHF channels 12 and 16
Telephone	45-96-204718
Facsimile	45-96-204711
E-mail	vagt@fhhavn.dk
Web site	https://www.fhhavn.dk

Caution.—The depths in the approach channels are subject to change due to shifting sands. Several wrecks and obstructions, best seen on the chart, lie close E of Frederikshavn.

A mooring buoy is situated about 3.2 miles SE of the harbor entrance. Two submarine oil pipelines, which may best be seen on the chart, extend in a W direction between this buoy and the coast.

A restricted area, with a radius of 300m and best seen on the

chart, lies 3 miles SE of Frederikshavn.

Works are in progress (2021) to extend the commercial harbor quayside SE.

8.6 Saebj (57°20'N., 10°32'E.), a small harbor, is situated 6 miles S of Frederikshavn and is protected by two breakwaters. The entrance, which faces E, has a controlling depth of 3.6m but is subject to silting. Vessels up to 50m in length, 8m beam, and 3.2m draft can enter. A water tower and a church, both conspicuous, are situated in the town.

A prominent church stands at Karup, about 5 miles WNW of Saebj. Bangsbo Bakker, a range of hills, extends N from Saebj to close S of Frederikshavn with only a narrow coastal strip.

Stensnaes (57°14'N., 10°32'E.) is located 6.5 miles S of Saebj. The coast between is backed by low sand dunes, about 1.5 miles inland. A conspicuous church is situated at Lyngsaa, 1.5 miles NW of Stensnaes.

Laeso Rende (57°17'N., 10°42'E.), the channel leading between the dangers fronting the coast and the shoals extending seaward from the W side of Laeso, lies 5.5 miles E of Stensnaes.

Laeso Rende Light (57°13'N., 10°40'E.), equipped with a racon, is situated 4.5 miles E of Stensnaes and marks the W side of the channel.

Laeso Rende, through which Route B leads, forms part of Western Channel. For more information concerning this channel and Laeso Rende Light, see paragraph 7.16; further information on the landmarks on the island of Laeso can be found in paragraph 7.9.

Caution.—A restricted area, which may best be seen on the chart, fronts the coast in the vicinity of Stensnaes and extends 1 mile seaward. Anchoring, fishing, or other seabed activities are prohibited in this area due to the existence of bottom mines.

A submarine cable area, which may best be seen on the chart, extends E between Stensnaes and Laeso.

8.7 Dvalegrunde (57°13'N., 10°39'E.), a shoal with a least depth of 2.5m, lies about 3 miles E of Stensnaes and extends about 3 miles NNW of Laeso Rende Light. It is marked on the W side by a buoy and on the SE side by a lighted buoy.

The bottom off this part of the coast consists of hard sand with weeds in some places. Under certain conditions, the light colored sand on the shoals is visible for a distance. This is particularly noticeable with respect to Dvalegrunde.

Between Stensnaes and the entrance to Limfjorden, 16 miles SSW, the coast is flat and partly wooded. There is a forested range of hills, known as Jyske Aas, situated several miles inland. Knosen, 136m high, rises about 9 miles WSW of Stensnaes. This hill, which is conspicuous from seaward, is the tallest peak of Jyske Aas.

Hals Barre Light (56°57'N., 10°26'E.), equipped with a racon, is shown from a prominent tower, 15m high, standing about 3.8 miles offshore, 17 miles SSW of Stensnaes. An auxiliary light, directed SE, is displayed below the light.

Svitringen Rende S Light (56°51'N., 10°36'E.), equipped with a racon, is shown from a prominent mast, 15m high, standing about 8.5 miles SE of Hals Barre Light.

Stensnaes Flak, a shallow shoal flat, forms part of the coastal bank and extends up to about 2 miles S of Stensnaes.

An extensive chain of shoal flats extends about 14 miles S

from Stensnaes Flak to the vicinity of Hals Barre Light. These flats have a least depth of 4m and may best be seen on the chart. The N part of the chain is known as Middelgrund and the S part, marked by a lighted buoy moored about 3 miles ENE of Hals Barre Light, is known as Svitringen. Langerevle, lying E of Svitringen, has depths of 6.9 to 9.7m. This bank extends S from the outer part of Middelgrund to close NE of Svitringen Rende S Light. Several banks, with depths of 6.5 to 9.7m, lie up to 9 miles E of the S part of Langerevle. These banks lie mostly parallel to the coast and may best be seen on the chart.

A channel, used only by small vessels with local knowledge, lies 2 to 3 miles offshore and parallel to the coast. It is entered through Landdybet, which leads between Dvalegrund and Stensnaes Flak. This channel, which has a controlling depth of 4.4m, passes E of the coastal bank and W of Middelgrund and Svitringen.

Voersa and Asaa Havn are two small fishing harbors situated 2 miles SW and 6 miles SSW, respectively, of Stensnaes. Asaa Havn, protected by breakwaters, is located on a small island, which is connected to the shore by an embankment, 450m long.

Hou, a yacht harbor, is situated 4 miles N of the entrance to Limfjorden and protected by breakwaters. A conspicuous church stands in the town.

No. 6 Lighted Buoy (56°58'N., 10°52'E.), which marks Route B, is moored about 11 miles NE of Svitringen Rende S Light.

No. 7 Lighted Buoy (56°51'N., 10°48'E.), which marks Route B, is moored about 6.5 miles E of Svitringen Rende S Light. This lighted buoy also marks Route C, Route F, and the approach track leading to Limfjorden.

Anchorage.—Vessels, with offshore winds, may anchor in suitable depths, fine sand and stones, anywhere off the coast between Stensnaes and the entrance to Limfjorden. Local knowledge is advised.

Caution.—Fish traps or nets may be encountered within 3 miles of the coast between Stensnaes and Limfjorden, 16 miles SSW.

A local magnetic anomaly is reported to exist in an area lying 5 miles E of Hals Barre Light.

A restricted area, which may best be seen on the chart, lies centered 1.5 miles SSW of Svitringen Rende S Light. Anchoring, fishing, or other sea bed activities are prohibited in this area due to the existence of bottom mines.

Limfjorden

8.8 Limfjorden (56°59'N., 10°19'E.), which leads from the Kattegat to the North Sea, is entered, at its E end, about 4 miles ENE of Hals Barre Light. The waterway consists of a series of lakes connected by narrow sounds. It is about 91 miles long and is entered at the W end via the Tyboron Kanal.

The waterway is a principal commercial fjord but, as a link between the North Sea and the Baltic Sea, its importance is reduced by a controlling depth of only 4m. For more information concerning the W entrance of this waterway, see Pub. 192, Sailing Directions (Enroute) North Sea.

Aalborg, a main port, is situated on the S side of the fjord, about 16 miles above the E entrance.

Ice.—With prolonged E winds, which prevail during periods of frost, the bar at E entrance to the fjord is liable to be closed

by ice. The entrance is also frequently slow to thaw.

Tide—Currents.—The range of the tide at Aalborg is 0.3m at springs. The tidal currents in the entrance change regularly during calm weather and attain a maximum rate of 2 knots. However, during bad weather, a current, induced by wind conditions, may set in the same direction for a considerable period. Persistent E winds during the spring cause a current to set W while persistent W winds during fall and winter cause a current to set E. Such currents may attain rates up to 4 knots.

Depths—Limitations.—From No. 7 Lighted Buoy (56°51'N., 10°48'E.), the approach route leads W for 6.5 miles through a dredged channel, 240m wide, to the vicinity of Svitringen Rende S Light. It then leads NW for 8 miles, using the white sector of Hals Barre Light, through a dredged channel marked by lighted buoys and lighted beacons.

From a position located about 0.6 mile SE of Hals Barre Light, a dredged channel, 110m wide, leads WNW and NW for about 5 miles into the entrance. This channel leads through the coastal bank and passes over the bar, which lies about 1 mile SE of the entrance and consists of drying shoals.

The entrance channel is dredged to a depth of 10.4m as far as Hals, which is located on the N side of the entrance. The fairway within the fjord is dredged to a depth of 10.1m as far as Aalborg. The controlling depth for approaching Aalborg from W is 4m. Vessels with drafts up to 9.3m can reach Aalborg from the E entrance of the fjord while those approaching from W are limited to a maximum draft of 3.8m.

An alternate approach channel, with a least depth of 4m, leads WSW from a position located 8 miles N of Svitringen Rende S Light. It passes SSE of the shallower parts of Svitringen and joins the main channel about 1 mile SE of Hals Barre Light.

Aspect.—The dredged channels are marked by lighted buoys and lighted beacons. The fairways are indicated by lighted ranges, which may best be seen on the chart.

Mulbjerg (56°55'N., 10°16'E.), a range of bare hills, stands 4 miles S of the entrance and is conspicuous from seaward.

Pilotage.—Pilotage is compulsory from Hals Barre Light to Aalborg for vessels with a draft of 6m and over. Exemptions are made for frequent visitors.

Pilots can be contacted by VHF and board in the following positions:

1. Hals 1—Near No. 7 Lighted Buoy (56°51.5'N., 10°46.5'E.).
2. Hals 2—1 mile NW of Svitringen Rende S Light (56°51.9'N., 10°35.3'E.).
3. Hals 3—7 miles NW of Svitringen Rende S Light (56°56.6'N., 10°29.0'E.).

Deep Sea (Transit) Pilots for The Sound, Store Baelt, and Lille Baelt may also be requested.

For pilots outside the bar:

1. For information on whether or not pilotage is compulsory, see Pub. 140, Sailing Directions (Planning Guide) North Atlantic Ocean and Adjacent Seas (Denmark—Pilotage).
2. Vessels should advise ETA to the pilots 24 hours and 12 hours in advance by e-mail, 2 hours in advance by telephone, and 30 minutes in advance on VHF channel 12.
3. Pilots board in the following positions:
 - a. Hals 1 (56°51.5'N., 10°46.5'E.)—near Lighted

Buoy No. 7.

b. Hals 2 (56°51.9'N., 10°35.3'E.)—1 mile NW of Svitringen Rende South Light.

c. Hals 3 (56°56.0'N., 10°29.0'E.)—7 miles NW of Svitringen Rende South Light.

Limfjord—Pilot Contact Information	
Harbor Pilots	
VHF	VHF channels 12 and 16 (only when the pilot vessel is manned.)
Telephone	45-91-528888
E-mail	24h@limfjordpilot.dk
Web site	https://www.limfjordpilot.com

Regulations.—The obligation for an inbound vessel to give way to an outbound vessel only applies in the dredged channel crossing the bar.

Vessels which, by reason of size, must keep strictly to the alignment of the ranges should display the appropriate shapes and lights for vessels constrained by their draft.

Traffic crossing the entrance in the vicinity of Hals must give way to vessels navigating in the main channel.

Anchorage.—An anchorage area, for vessels waiting to enter the fjord, lies centered 1.7 miles SE of Hals Barre Light, adjacent to the N side of the approach channel. It has a dredged depth of 10.4m over a bottom of fine sand.

Caution.—Fish traps or nets may be encountered within 3 miles of the coast on either side of the dredged approach channel.

A submarine cable, which may best be seen on the chart, extends NW from Hals Barre Light to the shore.

Anchorage is prohibited within an area, which may best be seen on the chart, extending across the entrance of the fjord in the vicinity of Hals.

A designated nature reserve area, which may best be seen on the chart, fronts the entrance of the fjord on both sides of the dredged channel and extends up to about 1 mile seaward. Entry into the area is subject to numerous special regulations.

8.9 Hals Havn (56°59'N., 10°19'E.) (World Port Index No. 30380), a small harbor, is situated on the N side of Limfjorden, close inside the entrance.

Depths—Limitations.—The harbor basin is quayed and vessels with a maximum draft of 5.7m can be accommodated in the harbor. For more berthing information see the table titled **Hals Havn—Berthing Information**.

A local ferry, which berths outside the basin at the W end of the harbor, runs to a pier located at Egensekloster Pynt, at the S side of the fjord. Egense Lystbadehavn, a yacht harbor, is situated close E of the ferry pier.

Hals Havn—Berthing Information		
Berth	Length	Remarks
Hals Terminal		
West	160m	General cargo.
East	150m	General cargo.

Hals Havn—Berthing Information		
Berth	Length	Remarks
Hals Ferry Terminal		
Hals Ferry	34m	Passengers and ro-ro.

A conspicuous church is situated at Hals, about 0.5 mile N of the harbor, and a chimney stands close W of it.

Pilotage.—Harbor pilotage is provided by DanPilot and Limfjord Pilot Aps. Vessels need to provide their ETA to the pilots 24 and 12 hours prior to arrival if using e-mail, 2 hours in advance if using the telephone, and 30 minutes in advance using VHF channel 12.

Pilots will board in the following positions:

1. Hals 1 (56°51.5'N., 10°46.5'E.)—near Lighted Buoy No. 7.
2. Hals 2 (56°51.9'N., 10°35.3'E.)—1 mile NW of Svitringeren Rende South Light.
3. Hals 3 (56°56.0'N., 10°29.0'E.)—7 miles NW of Svitringeren Rende South Light.
4. Limfjorden E—(57°01.3'N, 10°08.3'E).

Hals Havn—Pilot Contact Information	
DanPilot Harbor Pilots	
VHF	VHF channels 16 and 87
Telephone	45-63-256666
E-mail	danpilot@danpilot.dk
Web site	https://www.danpilot.dk
Harbor Pilots (Limfjord Pilot)	
VHF	VHF channels 12 and 16
Telephone	45-91-528888
E-mail	24h@limfjordpilot.dk
Web site	https://www.limfjordpilot.com

Aalborg (57°03'N., 9°55'E.)

World Port Index No. 30400

8.10 Aalborg (Alborg), a main port, is situated 16 miles above the E entrance of Limfjorden. It consists of the amalgamated cities of Aalborg, on the S shore, and Norresundby, on the N shore. The facilities include a number of river berths and several harbor basins.

Port of Aalborg
https://portofaalborg.com

Tides—Currents.—The tidal range is about 0.3m. Winds from W may raise the water level by up to about 1.3m and winds from E may reduce it by as much as 0.9m.

Depth—Limitations.—Two overhead cables, with a vertical clearance of 49.5m, span the channel in the vicinity of Bredhage (57°04'N., 10°02'E.).

The Limfjorden Road Bridge (57°03.3'N., 9°55.2'E.) spans the fjord at the W end of Aalborg and has a central double-bascule section. It has a vertical clearance of 9.5m when closed and provides a navigable passage 30m wide.

The Jernbanebroen Railroad Bridge spans the fjord 0.4 mile NW of the road bridge and is supported on seven piers. A single bascule section, located between the third and fourth piers from the S shore, provides a navigable passage 30m wide.



Aalborg—Bridges from E



Aalborg—Gronlandshavn



Aalborg—Nordjyllandsvaerkets

A tunnel crosses the fjord at the E end of Aalborg. The port extends along both sides of the fjord and consists of a number of river berths and several harbor basins. It provides about 4 miles of total quayage.

Aalborg Osthavn (57°03'N., 10°03'E.), a bulk terminal, is situated at the SW side of the fjord, about 5 miles E of the city.

Gronlandshavn, a private harbor, is situated 0.5 mile SSE of

Aalborg Osthavn and consists of a basin and a riverside quay. This harbor handles container and ro-ro vessels. It provides 1,450m of berthage.

Aalborg—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
Aalborg North Shore Terminal							
No. 3012	208m	10.1m	—	—	—	—	Closed. Breakbulk.
No. 3013	117m	8.3m	—	—	—	—	Closed. Breakbulk.
No. 3014	115m	7.9m	111.7m	—	15.8m	5,950 dwt	Continuous berthing length of 505m. Breakbulk and bunkers. 4,102 gt.
No. 3015	110m	7.9m	113.8m	—	16m	6,358 dwt	Continuous berthing length of 505m. Grain, breakbulk, and bunkers. 4,503 gt.
No. 3016	230m	7.9m	116m	—	15.8m	7,566 dwt	Continuous berthing length of 505m. Breakbulk and bunkers. 4,723 gt.
Aalborg Portland Cement Works							
East	220m	9.1m	180m	—	32.0m	38,719 dwt	Continuous berthing length of 440m. Cement. 25,546gt.
West	220m	9.1m	190m	8.9m	30.0m	37,721 dwt	Continuous berthing length of 440m. Cement. 24,184 gt.
Bulk Cargo Terminal							
No. 8004	115m	6.3m	160.6m	—	27.5m	12,975 dwt	Project/heavy cargo and breakbulk. 15,199 gt.
No. 8005	340m	9.5m	190.6m	—	28.5m	38,056 dwt	Project/heavy cargo, bunkers, and breakbulk. 26,787 gt.
No. 8006	158m	4.7m	166.1m	—	27.5m	19,359 dwt	Scrap metal, bunkers, and breakbulk. 16,732 gt.
Central Harbor Terminal							
No. 4110	425m	8.2m	245.6m	—	32.2m	36,563 dwt	Breakbulk, cruise, and bunkers. 63,786 gt.
No. 4111	230m	6.7m	107m	—	16.2m	6,318 dwt	Breakbulk and bunkers. 4,358 gt.
No. 4112	70m	7.5m	23.7m	—	5.6m	19 dwt	Breakbulk and naval vessels. Berth visited by Naval patrol vessels. 81 gt.
No. 4113	208m	6.8m	115.5m	—	16.5m	6,419 dwt	Breakbulk and bunkers. 5,232 gt.
Coal Terminal							
Coal	357m	—	199.9	—	32.2m	63,413 dwt	Coal. 36,300 gt.
Container Terminal							
No. 8013	248m	9.7m	179.4m	—	30.9m	25,726 dwt	Continuous berthing length: 630m. Ro-ro freight, breakbulk, bunkers, and containers. 26,169 gt and 2,150 teu
Gronlandshaven							
No. 8010/8011	—	8.1m	159.8m	—	24m	12,007 dwt	Continuous berthing length: 515m. Bunkers and breakbulk. 12,950 gt. No restriction on maximum air draft.

Aalborg—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
No. 8012	190m	7.9m	114.4m	—	22.7m	8,624 dwt	Bunkers. Used as a lay-by. 10,537 gt.
No. 8014	125m	9.6m	159.8m	—	24.0m	11,940 dwt	Continuous berthing length: 630m. Bunkers and breakbulk. 13,058 gt.
No. 8015	250m	9.6m	159.8m	—	24.0m	17,309 dwt	Continuous berthing length: 630m. Gypsum, breakbulk, and bunkers. 14,145 gt. Berth can handle gravel.
No. 8016	210m	9.6m	199.9m	—	32.0m	40,481 dwt	Ro-ro freight, gypsum, breakbulk, bunkers, and others. 33,313 gt. Berth can handle gravel.
Honnøer Quay							
4041	185m	8.8m	236.7m	—	31.2m	7,637 dwt	Cruise vessels and bunkers. 58,119 gt.
Nordjylland Power Station							
700	345m	9.5m	190m	—	32.0m	43,706 dwt	Coal and bunkers. 27,078 gt.
The Danish Carriers							
Danish Carriers East	245m	—	37.7m	—	8.0m	—	Ro/pax. Berth visit by passenger sailing ship. 257GT.
Danish Carriers West	215m	—	38m	—	7.5m	—	Ro/pax. Berth visits by passenger sailing ships. 226 gt.
Circle K Terminal							
No. 4125	270m	9.5m	250m	9.4m	32.2m	74,995 dwt	Clean products.
JMO Terminal							
No. 4124	114m	9m	130m	—	19.0m	7,846 dwt	Petroleum products and chemical gases. Deals with liquefied ammonia and liquid chemical goods (mainly UAN)
Oil Storage Terminal							
No. 4121	145m	9.5m	250m	9.3m	32.2m	40,549 dwt	Clean products. Continuous berthing length of 490m.
POAT Terminal							
No. 4123	210m	9.5m	250m	—	23.0m	17,999 dwt	Clean products. Continuous berthing length of 490m.
Samtank Terminal							
No. 4122	135m	9.4m	250m	9.3m	23.0m	18,736 dwt	Clean products. Continuous berthing length of 490m.

Nordjyllandsvaerkets Havn (57°04.4'N., 10°02.3'E.), situated close NW of the overhead cables, serves a power station. It provides a main quay.

Several quays are situated at Rordal, 2 miles NE of Aalborg.

There are facilities for general cargo, ro-ro, container, tanker, bulk, gas, chemical, and passenger vessels. In addition, there are several basins for fishing vessels, small craft, and pleasure boats.

Vessels up to 74,995 dwt, 250m in length, 32.2m beam, and 9.4m draft can be accommodated within the port. For more berthing information see the table titled **Aalborg—Berth**

Information.

Aspect.—The fairway within the fjord is indicated by lighted ranges and marked by lighted buoys. A conspicuous red farm house stands on the N shore at Osteragard, 3.2 miles W of Hals. Two pairs of prominent beacons, marking a conservation area, stand on the S shore about 3 miles WNW of Osteragard. A conspicuous church, with a dark roof, is situated at Vester Hassing, 4.8 miles NW of Osteragard.

The southeasternmost cable spanning the channel at Bredhage (57°04'N., 10°02'E.) is supported by two conspicuous

masts, 142m high. A conspicuous group of seven wind generators is situated about 0.8 mile N of the overhead cable. A prominent church, with a dark roof, stands on high ground at Norre Tranders (57°02'N., 9°59'E.).

The facilities extending along the S side of the port are backed by the city of Aalborg while those on the N side are backed by the town of Norresundby. Numerous conspicuous chimneys and silos stand in the vicinity of the quays.

Pilotage.—Pilotage is compulsory for vessels, 53m in length and over, when passing under the Jernbanebroen Railroad Bridge. Vessels with a draft of 6m and over shall employ a pilot when navigating between Hals Barre Light and the Aalborg port.

Vessels need to provide their ETA to the pilots 24 hours and 12 hours prior to arrival if using e-mail, 2 hours in advance if using the telephone, and 30 minutes in advance using VHF channel 12.

The pilots board in the following positions:

1. Hals 1 (56°51.5'N., 10°46.5'E.)—near Lighted Buoy No. 7.
2. Hals 2—(56°51.9'N., 10°35.3'E.)—1 mile NW of Svitringen Rende South Light.
3. Hals 3 (56°56.0'N., 10°29.0'E.)—7 miles NW of Svitringen Rende South Light.
4. Limfjorden E (57°01.3'N., 10°08.3'E.).

For information concerning pilotage into Limfjorden, see paragraph 8.8.

Aalborg—Pilot Contact Information	
DanPilot Harbor Pilots	
VHF	VHF channels 12 and 16
Telephone	45-63-256666
E-mail	danpilot@danpilot.dk
Web site	https://www.danpilot.dk
Harbor Pilots (Limfjord Pilot)	
VHF	VHF channels 12 and 16
Telephone	45-91-528888
E-mail	24h@limfjordpilot.dk
Web site	https://www.limfjordpilot.com

Regulations.—The service of tugs is compulsory for vessels over 1,500 dwt when passing through the Limfjorden Road Bridge or the Jernbanebroen Railroad Bridge.

The Jernbanebroen Railroad Bridge opening times are from 0500 to 2100. However, commercial vessels can make arrangements with the bridge watchkeeper to open any time if the request is made before 2000.

Caution.—A submarine cable area, the limits of which are shown on the chart, lies in the vicinity of the Limfjorden Road Bridge and the Jernbanebroen Railroad Bridge.

Limfjorden to Fornæs

8.11 The coast between Limfjorden and Fornæs, about 39 miles SE, forms the W and S sides of Alborg Bugt, which en-

compasses Mariager Fjord and Randers Fjord in its SW part.

The entire N section of this coast between Limfjorden and Mariager Fjord, 16.5 miles S, is low and sparsely wooded. Only at Als, located 3 miles N of Mariager Fjord, does the coast rise to a height of 25m before dropping down again. A conspicuous white church stands at Als; windmills are situated close SW of it.

The coastal bank along this stretch, with depths of less than 10m, extends up to about 8 miles seaward and the 5m curve lies about 3.5 miles offshore. Muldbjerg Grund (56°55'N., 10°22'E.), a rocky shoal, lies about 4.5 miles SSE of the entrance to Limfjorden, on the N part of this coastal bank, and has a least depth of 2.2m.

Oster Hurup (56°48'N., 10°17'E.), a small fishing harbor, is situated 6 miles N of Mariager Fjord. This artificial harbor is protected by two moles and connected to the shore by a road embankment, 350m long.

Caution.—Vessels should remain close to the center of the indicated ranges while transiting the approach fairways due to the location of adjacent shoals.

Fish traps or nets may be encountered within 3 miles of the coast between Limfjorden and Mariager Fjord.

8.12 Mariager Fjord (56°42'N., 10°20'E.) extends about 20 miles in a general W direction to Hobro, a small loading port located at its head. Other ports within this fjord include Hadsund, situated on the N shore about 7 miles W of the entrance, and Mariager, situated on the S shore about 6 miles above Hadsund. In addition, there are several small craft and pleasure boat harbors within the fjord.

Tides—Currents.—The tidal range at the entrance to the fjord is about 0.8m at springs and 0.5m at neaps.

Strong winds from NW to NE may raise the water level by up to about 1.5m and strong winds from SE to SW may reduce it by as much as 0.7m.

Outside the entrance to the fjord, the flood current sets S and the ebb current sets N, at rates of up to 2 knots. Inside the entrance bar, the tidal currents set in the direction of the channel at rates of up to 3 knots. During gales, the rate of these currents may increase to 4 knots. The currents turn about 2 hours after HW and LW.

Depths—Limitations.—The entrance to the fjord is fronted by a shoal flat, which extends up to about 5 miles seaward and may best be seen on the chart.

From No. 2 Lighted Buoy (56°41'N., 10°38'E.), which marks Route F, a track leads W for 4 miles to the vicinity of Mariager Fjord Lighted Buoy and then NW for 2.5 miles to Mariager Fjord Rende East Lighted Buoy. It passes SW of the seaward extremity of the N part of the shoal flat, which is marked by buoys, and NE of the S part of the shoal flat.

From Mariager Fjord Rende East Lighted Buoy, a dredged channel leads in a WSW direction for 3 miles across the bar and into the fjord. This dredged channel and the fairway within the fjord have a least depth of 5.7m. Vessels with drafts up to 5.2m can enter.

The fairway within the fjord is divided into two distinct parts. The E part extending to Dania, located about 10 miles above the entrance, is narrow, winding, and has depths of 5.7 to 14m. The sides are steep-to and the greater part of the water area on either side dries. The W part extending above Dania is

deep up to within 2 miles of Hobro, at the head.

The Hadsund Bridge, a fixed bridge, spans the fjord and is supported by seven pillars. A double-bascule section, located between the third and fourth pillars from the N end, provides a navigable passage, 26m wide. For vessels with a deck height exceeding 12m, the passage is reduced to a width of 24.5m.



The Hadsund Bridge

An overhead cable, with a vertical clearance of 36m, spans the fjord about 3 miles from the head.

Aspect.—The land near the entrance to the fjord is low and partly wooded but rises inland. Overgaard Manor House stands on the S side of the fjord about 3 miles WSW of the entrance. This building is prominent and can be easily recognized by its dark spire and the woods in the vicinity.

The dredged entrance channel is indicated by a lighted range and marked by buoys. The fairway within the fjord is indicated by numerous lighted ranges and marked by buoys.

Pilotage.—Pilotage is compulsory for all vessels of 60m in length and over and all vessels with a draft of 3.5m and over. Some exemptions may be made for frequent visitors. Pilots are stationed at Als Odde, on the N side of the entrance. They may be contacted by VHF and board in the vicinity of Mariager Fjord Lighted Buoy (56°41'N., 10°30'E.).

For further information, see Pilotage in paragraph 7.1.

Regulations.—Navigation at night is limited to vessels up to 1,500 dwt, fitted with a search light.

The maximum speed allowed in the dredged channel is 7 knots.

When it appears likely that vessels of moderate size proceeding in opposite directions will meet in one of the dredged chan-

nels, the vessel proceeding with the current has the right of way. This regulation applies regardless of whether one or both of the vessels are displaying the privileged vessel signal for navigating in Danish inland waters.

Anchorage.—Vessels waiting to enter the fjord may anchor, in depths of 6 to 7m, fine sand, close E of Mariager Fjord Lighted Buoy (56°41'N., 10°30'E.). Small local vessels may anchor on the sand flat fronting the entrance to the fjord.

Vessels may anchor within the fjord but they must not obstruct the channel or prevent access to the piers.

Caution.—Vessels without local knowledge are advised not to enter the fjord without the services of a pilot.

A restricted area, which may best be seen on the chart, lies centered 2.5 miles E of the fjord entrance on the S side of the dredged channel. Anchoring, fishing, or other seabed activities are prohibited in this area due to the existence of bottom mines.

The E part of the fjord, between the entrance and the bridge at Hadsund, is a designated nature reserve. Entry is subject to numerous special regulations.

8.13 Hadsund Havn (56°43'N., 10°07'E.) (World Port Index No. 30340), a small harbor, is situated on the N side of the fjord close SW of the bridge. It provides several riverside berths. Vessels up to 4,000 dwt, 120m in length, 18m beam, and 5.2m draft can be accommodated. For more berthing information see the table titled **Hadsund Havn—Berth Information**.

Hadsund Havn—Berth Information			
Berth	Length	Depth	Remarks
Hadsund Harbor			
Main	155m	5.7m	General cargo.
Southwest	55m	5.7m	General cargo.

Dania Cement Terminal (56°41'N., 10°03'E.), situated on the S side of the fjord, consists of berthing facilities at Dania Havn and Kongsdal Havn, close SE. A conspicuous silo stands near the berth at Dania Havn.

Vessels up to 130m in length, 18m beam, and 5.2m draft can be accommodated.

For berthing information see table titled **Dania Cement Terminal—Berth Information**.

HJ Hanson A/S Bro Terminal (56°42'N., 10°03'E.) consists of a pier, 44m long, with a depth of 5m alongside. Vessels up to 80m in length, 12m beam, and 4.8m draft can be handled.

Dania Cement Terminal—Berthing Information						
Berth	Length	Depth	Maximum Vessel			Remarks
			LOA	Draft	Beam	
Cemenfabriken Terminal						
Cemenfabriken	132m	—	—	—	—	Cement.
Dank Salt Havn Terminal						
Salt	38m	5.7m	130m	5.2m	18.0m	Salt. Berthing length of 98m (including dolphins).

Dania Cement Terminal—Berthing Information

Berth	Length	Depth	Maximum Vessel			Remarks
			LOA	Draft	Beam	
Dania Havn Terminal						
Dania Havn	125m	5.7m	—	—	—	Chemicals, cement, and breakbulk.

Dansk Salt I/S Anlaegskaj Terminal (56°41'N., 10°02'E.) consists of a private quay, 140m long, with a depth of 5.7m alongside. Vessels up to 1m in length, 18m beam, and 5.2m draft can be handled.

Mariager Havn (56°39'N., 9°59'E.) (World Port Index No. 30350) is situated on the S side of the fjord about 3.2 miles above Dania Havn. The commercial facilities consist of a small basin and a quay, with a depth of 5.6m alongside.

Mariager Havn, fronting the largest town in the fjord, is situated at the head. This small harbor consists of a basin with 518m of quayside and a depth of 5.7m alongside. Vessels up to 130m in length and 5m draft can be accommodated.

8.14 Between Limfjorden and Randers Fjord, 6 miles S, the coast is fronted by a sand flat, with depths of less than 5m, which extends irregularly up to 2.7 miles seaward and may best be seen on the chart.

Boels Rev, a detached shoal patch, lies about 1 mile offshore, 3 miles NE of the entrance to Randers Fjord. It has a least depth of 0.9m and is marked from April to November by a buoy.

Boels Plade (56°38'N., 10°28'E.), a shoal bank with a least depth of 5m, lies centered 5 miles ENE of the entrance to Randers Fjord and should not be crossed in heavy seas.

Hevring Flak, a rocky extension of the coastal bank, fronts the shore about 5 miles SE of the entrance to Randers Fjord. Fjellerup Flak, a small detached bank with a least depth of 5.5m, lies 1.5 miles offshore, about 5 miles E of Hevring Flak.

Tangen (56°36'N., 10°45'E.), an extensive shoal area, lies in the S part of Alborg Bugt, with its W part located about 7 miles E of the entrance to Randers Fjord. The W part of this shoal area has a least depth of 2.8m but is subject to considerable and sudden changes.

The E part of Tangen consists of numerous smaller shoal patches, with depths of 4 to 6m, which may best be seen on the chart. These patches lie up to about 9 miles NW, 6 miles N, and 5 miles NE of Gerrild Light (56°32'N., 10°50'E.).

Numerous wrecks, some dangerous, lie in the vicinity of Tangen and may best be seen on the chart.

Udbyhoj Light (56°35'N., 10°19'E.) is shown from a prominent building, 6m high, standing on Elkaer Bakke, a hill, which rises to a height of 31m on the S side of the entrance to Randers Fjord.

8.15 Randers Fjord (56°36'N., 10°20'E.) provides access to Randers Havn, situated 16 miles above the entrance. It leads generally SSW for about 9 miles to Ugelhuse and then W for about 6 miles to Randers. Several small harbors, used only by fishing vessels, local ferries, and pleasure craft, are situated within the fjord.

Tides—Currents.—The tidal range in the fjord entrance is about 0.8m at springs and 0.3m at neaps.

Strong winds from NW to NE may increase the water level in the fjord by up to 1.7m and strong winds from SW to SE may reduce it by as much as 0.7m.

During calm weather, the ebb and flood tidal currents set in the direction of the channel within the fjord. The flood current attains a maximum rate of 2.5 knots; the ebb current attains a maximum rate of 4 knots. Seaward of the fjord entrance, the ebb and flood tidal currents set N and S, respectively. During unsettled weather, irregular tidal currents prevail and they may set in one direction for a longer period of time.

Depths—Limitations.—The fjord may be approached from NE or SE. Vessels approaching from NE may pass either side of Boels Plade (56°38'N., 10°28'E.). Vessels approaching from SE should pass between the S side of Tangen and the coast.

A dredged approach channel, with a bottom width of 30 to 50m, leads WSW for about 2 miles across the bar. This channel and the fairway within the fjord have a controlling depth of 7m. Vessels with drafts up to 5.8m may enter.

The outer part of the fjord is 0.3 to 0.9 mile wide but the depths lying outside the fairway channel are shallow. The inner part is narrow and runs between fields on either side. The fairway within the fjord has a minimum width of 22m.

An overhead cable, with a vertical clearance of 40m, spans the channel 3 miles W of Ugelhuse.

Aspect.—The land in the vicinity of the fjord is low but rises gradually inland, the steeper slopes being on the S side. The entrance to the fjord, in good visibility, may be easily distinguished by the dip between the hills.

An outer approach lighted buoy is moored about 3.5 miles ENE of Udbyhoj Light (56°35'N., 10°19'E.). The approach channel is indicated by a lighted range and marked by buoys. The various channel reaches are marked by beacons and buoys.

In the vicinity of the entrance, prominent churches stand at Sodring, Raby, and Udby, which are situated 2.3 miles N, 3 miles WNW, and 1.2 miles SSW, respectively, of Udbyhoj Light.

Pilotage—Pilotage is compulsory for the following types of vessels:

1. Vessels with an loa of 116m or more.
2. Vessels with a beam of 15.5m or more.
3. Vessels with a draft of 5.6m or more.
4. Tugs engaged in towing.
5. Tankers.

Vessels should advise their ETA at the pilot station at least 18 hours in advance.

Pilot boards near the lighted fairway buoy in position 56°37.0'N 10°25.0'E.

A searchlight is required by pilots for night navigation.

Inbound vessels and vessels leaving the harbor or shifting berth must report on VHF channel 16 at least 15 minutes in advance of the time of expected passing the lighted fairway buoy. Any corrections to this report must be made with at least 10

minutes notice.

Regulations.—Entry at night is restricted to vessels of up to 1,000 dwt provided they are equipped with an approved and powerful searchlight.

Speed limits are in force within the fjord.

Vessels proceeding with the tidal current have the right of way over vessels proceeding against it.

Anchorage.—Vessels waiting to enter the fjord may anchor, in a depth of 8m, fine sand, close E of the outer approach lighted buoy (56°37'N., 10°25'E.).

Caution.—Spoil ground dumping areas, which may best be seen on the chart, lie centered 4.2 miles ENE and 2.1 miles E of Udbyhøj Light.

Submarine cables extend across the fjord in various places and are marked by notice boards.

A ferry crosses the fjord about 6 miles above the entrance.

8.16 Randers Havn (56°27'N., 10°03'E.) (World Port Index No. 30330), a small port, is situated at the mouth of the River Gudena, which flows into the head of Randers Fjord. It remains open all year round. A number of prominent chimneys and silos stand in the vicinity of the harbor.

Depths—Limitations.—Recent dredging within Randers may affect numerous berths detailed in the table titled **Randers—Berthing Information**. Mariners are advised to navigate with caution in Randers Harbor and contact local port authority for the latest information.

The harbor consists of two quayed basins, divided by a large pier, which have depths of 6 to 7m alongside. The maximum permitted draft is decided by the pilot on an individual ship basis whenever a vessel has a draft exceeding 5.6m.

There are facilities for general cargo and bulk vessels. Vessels up to 145m in length, 19m beam, and 6.1m draft can be accommodated.

Randers—Berthing Information					
Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
South Harbor Berths					
No. 51	—	6.0m	100m	4.8m	Breakbulk. Continuous berthing length of 413m.
No. 53	—	6.0m	100m	4.8m	Breakbulk. Continuous berthing length of 413m.
No. 54	—	6.0m	100m	5.0m	Breakbulk. Continuous berthing length of 956m.
No. 55	—	6.0m	100m	4.8m	Breakbulk. Continuous berthing length of 413m.
No. 56	—	6.0m	100m	5.0m	Breakbulk. Continuous berthing length of 956m.
No. 57	—	6.0m	100m	4.8m	Breakbulk. Continuous berthing length of 413m.
No. 58	—	6.0m	100m	5.0m	Breakbulk. Continuous berthing length of 956m.
No. 59	—	6.0m	100m	4.8m	Breakbulk. Continuous berthing length of 413m.
No. 60	—	6.0m	100m	5.0m	Breakbulk. Continuous berthing length of 956m.
No. 61	—	6.0m	100m	4.8m	Breakbulk. Continuous berthing length of 413m.
No. 62	—	6.0m	100m	5.0m	Breakbulk. Continuous berthing length of 956m.
No. 63	—	6.0m	100m	4.8m	Breakbulk. Continuous berthing length of 413m.
No. 63A	131m	6.0m	100m	4.8m	—
No. 64	—	6.0m	100m	5.0m	Breakbulk. Continuous berthing length of 956m.
No. 65	143m	7.0m	100m	5.8m	Breakbulk.
No. 66	—	7.0m	100m	5.8m	Continuous berthing length: 956m. Breakbulk.
No. 67	98m	7.0m	100m	5.8m	Breakbulk.
No. 68	—	7.0m	100m	5.8m	Breakbulk. Continuous berthing length of 956m.
No. 70	—	7.0m	100m	5.8m	Breakbulk. Continuous berthing length of 956m.
No. 72	—	7.0m	100m	5.8m	Breakbulk. Continuous berthing length of 956m.
No. 74	—	7.0m	100m	5.8m	Breakbulk. Continuous berthing length of 956m.
No. 76	—	7.0m	100m	5.8m	Breakbulk. Continuous berthing length of 956m.
No. 78	—	7.0m	100m	5.8m	Breakbulk. Continuous berthing length of 956m.
No. 80	—	7.0m	100m	5.8m	Cement and breakbulk. Continuous berthing length of 956m.

Randers—Berthing Information					
Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
No. 82	—	7.0m	100m	5.8m	Cement and multipurpose. Continuous berthing length of 956m.
No. 84	—	7.0m	100m	5.8m	Breakbulk. Continuous berthing length of 956m.
No. 86	—	7.0m	100m	5.8m	
North Harbor Berths					
No. 1	—	—	—	—	Breakbulk. Continuous berthing length of 113m.
No. 2	60m	—	—	—	Breakbulk.
No. 3	—	—	—	—	Breakbulk. Continuous berthing length of 113m.
No. 4	—	—	—	—	Breakbulk. Continuous berthing length of 553m.
No. 6	—	—	—	—	Breakbulk. Continuous berthing length of 553m.
No. 8	—	7.3m	144m	5.8m	Breakbulk. Continuous berthing length of 553m.
No. 10	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 553m.
No. 11	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 377m.
No. 12	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 553m.
No. 14	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 553m.
No. 15	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 377m.
No. 16	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 553m.
No. 17	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 377m.
No. 18	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 553m.
No. 19	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 377m.
No. 20	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 553m.
No. 21	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 377m.
No. 22	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 553m.
No. 23	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 377m.
No. 24	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 553m.
No. 25	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 377m.
No. 26	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 553m.
No. 27	—	7.0m	144m	5.8m	Breakbulk. Continuous berthing length of 377m.
No. 28	56m	—	—	—	Breakbulk.
No. 29	67m	7.0m	100m	5.0m	Breakbulk.
No. 30	12m	7.0m	145m	6.0m	Vegetable oils. Maximum beam of 19.0m.

Contact Information.—See the table titled **Randers Havn—Contact Information.**

Randers Havn—Contact Information	
Port Control	
VHF	VHF channels 12 and 16
Telephone	45-86-421057
E-mail	mail@randershavn.dk

Randers Havn—Contact Information	
Web site	https://www.randershavn.dk

Caution.—A submarine pipeline extends across the fjord, close E of the pier dividing the two harbor basins. Depths in the harbor basins may be reduced by silting.

8.17 The coast extending SE for 6 miles from Randers Fjord to Hevring, a village, is low and wooded. A conspicuous

**Randers Havn**

red church, with a pointed tower, stands at Estruplund, about 0.3 mile inland, 2.6 miles SE of Udbyhoj Light.

The coast then continues E for about 14 miles to Knudshoved, a grass-covered point. This stretch is mostly flat with a few low hills, but the land behind is high.

Bonnerup Havn (56°32'N., 10°43'E.), a small artificial harbor, is situated 4 miles W of Knudshoved and is used only by fishing vessels and pleasure craft. It is connected to the shore by an embankment. Seven conspicuous wind generators stand in line along the harbor breakwaters.

A conspicuous windmill, without sails, is situated near the shore about 0.3 mile W of Bonnerup Havn.

Mejlgard Manor House, with a red roof and spire, is situated 2.5 miles SW of Bonnerup Havn and is prominent from seaward.

**Mejlgard Manor House**

Gjerrild Light (56°32'N., 10°50'E.) is shown from a prominent tower, 11m high, standing on Knudshoved.

Prominent churches stand at Glesborg and Rimse, 4.5 miles SW and 3.2 miles SSW, respectively, of Gjerrild Light.

Gjerrild Flak, a shoal flat with depths of less than 6m, fronts the NE side of Knudshoved and extends up to about 1.5 miles seaward.

From Gjerrild Light, the coast extends SE for 6.5 miles to

Fornaes and is low, with inland woods. Gjerrild Klint, located 1.4 miles SE of the light, and Karby (Sangstrup) Klint, located 2 miles farther SSE, are two white cliffs, each about 0.8 mile long, which are prominent from seaward.

Caution.—Hevring Firing Practice Area, marked by buoys, extends about 3 miles seaward from two signal masts, which are situated 4.5 miles and 5.7 miles SE of Udbyhoj Light. When the area is in use, signals are displayed from the masts. By day, a ball is hoisted at each signal mast and a flashing light is shown from the southeasternmost mast. At night, a flashing red and white light is shown from the southeasternmost mast.

Between Gjerrild Light and Fornæs, fishing nets, extending up to about 500m from the shore, may be encountered.

Fornaes to Arhus Bugt

8.18 Fornæs (56°26'N., 10°58'E.), the E extremity of Jylland, is a broad projecting point. A light is shown from a prominent tower, 27m high, standing on this point. The light is obscured to the NW by Gjerrild Klint.

**Fornaes**

No. 4 Lighted Buoy (56°24'N., 11°06'E.) is moored about 5.5 miles ESE of Fornæs Light and marks the junction of Route E, Route A, and Route F.

A conspicuous white church stands at Hammelev, about 2 miles W of Fornæs Light.

A shoal patch, with a depth of 4.2m, lies about 0.3 mile off the S part of Fornæs and 0.7 mile S of the light. It is marked close SE by a buoy.

Caution.—A prohibited area (Anholt Wind Farm) is centered about 13.5 miles NE of the Fornæs Light. A lighted transformer platform (56°35.8'N., 11°09.2'E.) marks the seaward end of a submarine cable to Grenaa.



Grenaa Havn

8.19 Grenaa Havn (56°25'N., 10°55'E.) (World Port Index No. 30290), a small commercial port and ferry terminal, is situated 2 miles SSW of Fornaes Light and is open year round.

Port of Grenaa Home Page

<https://www.port-of-grenaa.com>

Tides—Currents.—The tidal range is about 0.3m.

The tidal currents along this part of the coast change regularly every 6 hours during good weather. The N setting current is predominant with the S setting current being usually weak. Gale force winds from NW to N may raise the water level by up to 1.1m while gale force winds from SE to S may lower it by as much as 1.2m.

Depths—Limitations.—Kalkgrunden, a rocky reef, lies with its W end located close NE of the harbor entrance and has a least depth of 0.6m. It extends E for about 0.6 mile and is marked by lighted buoys. From a position located 2.5 miles E of Fornaes Light, the main approach channel, dredged to 12m

and 100m wide, leads WSW and passes NNW of this reef.

The harbor is protected by two breakwaters, which form an entrance facing NNE. From a position located about 0.2 mile NNE of the E breakwater head, an entrance channel leads SW into the harbor. The least depth in the entrance channel and outer part of the harbor is 10.1m.

The harbor is divided by a detached mole into two parts, known as Nordhavn and Sydhavn. Basin No. 1 and Basin No. 2 are situated in Sydhavn.

Basin No. 3, Basin No. 4, and Basin No. 5 form the commercial harbor and are situated in Nordhavn. Basin No. 3 has numerous amounts of quayage. There is also an oil and gas jetty.

The port has facilities for fishing, offshore exploration support, general cargo, bulk, ferry, tanker, ro-ro, and container vessels. Vessel up to 190m in length and 9.2m draft can be accommodated.

A small craft harbor is situated close S of the commercial port and protected by two moles. For more berthing information see the table titled **Grenaa Havn—Berth Information**.

Grenaa Havn—Berth Information

Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
Ferry Harbor					
Faergehavn I	60m	6.0-7.0m	—	—	Passengers.
Faergehavn II	8m	4.5m	—	—	Ro-ro and passengers.
Faergehavn III	6m	6.0-7.0m	—	—	Ro-ro and passengers
Basin II Terminal					
No. 21-23	176m	4.5m	—	4.0m	Seafood.

Grenaa Havn—Berth Information					
Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
Basin III Terminal					
No. 31-33	205m	6.0-7.0m	—	6.2m	Dry cargo.
No. 34	127m	6.0-7.0m	—	6.2m	Yeast and dry cargo.
No. 35	140m	6.3-6.5m	165m	—	—
No. 36	140m	6.3-6.5m	165m	—	Ro-ro facilities available.
Basin IV Terminal					
No. 41	81m	6.0-7.0m	—	6.2m	Dry cargo.
No. 42-44	297m	6.0-7.0m	—	6.2m	Dry cargo.
No. 45	178m	6.0-7.0m	—	6.2m	Dry cargo.
Basin V Terminal					
No. 51-53	365m	11.0m	—	9.2m	Petroleum products, wood pellets, fertilizer, and salt.
No. 54-56	393m	11.0m	—	—	Dry cargo.
No. 57-59	294m	11.0m	—	—	Dry cargo.

Aspect.—Directional sector lights, which may best be seen on the chart, indicate the approach and entrance channels. An outer approach lighted buoy is moored about 1.1 miles SSE of Fornæs Light.

A conspicuous church stands in the town, about 1.8 miles W of the harbor, and a prominent willow is situated on high ground 0.6 mile NW of it. Several prominent chimneys stand in the vicinity of the harbor.

Pilotage.—Pilots can be contacted by VHF and board, as follows:

1. Grenaa—about 2.7 miles ENE of the harbor entrance.
2. Route A—in the vicinity of No. 4 Lighted Buoy (56°24'N., 11°06'E.) (see Directions in paragraph 7.8).

For further information, see Pilotage in paragraph 7.1.

Contact Information.—Grenaa Havn may be contacted by e-mail (info@grenaaahavn.dk).

Caution.—Ferries berthing during strong wind conditions sometimes create excessive propeller wash within the harbor.

Grenaa—Contact Information	
Port	
Telephone	45-87-587600 (24 hours)
E-mail	info@grenaaahavn.dk
Web site	https://www.grenaaahavn.dk
Pilots (Dan Pilot Grenaa)	
VHF	VHF channels 12 and 87
Telephone	45-63-256666
E-mail	danpilot@danpilot.dk
Web site	https://www.danpilot.dk

Vessels with drafts of over 4m should not approach the E

breakwater head from SE within a distance of 80m.

A dangerous wreck, best seen on the chart, lies 5.5 miles SE of Grenaa.

8.20 Between Grenaa Havn and Havknude, a rounded point situated 4.3 miles S, the land is low except near Katholm, located close NNW of Havknude. In contrast to the low land, wooded hills rise in this vicinity.

A conspicuous white church, with a slate roof, stands at Also, about 2.7 miles NW of Havknude.

Havknude Flak (56°21'N., 10°56'E.), consisting of a number of shoal patches with depths of less than 5m, extends about 2 miles seaward from the coast in the vicinity of Havknude and is marked by a buoy.

Rothes Grund, a rocky shoal patch, lies about 0.5 mile offshore, 3.3 miles SSW of Havknude, and has a least depth of 2.3m.

Glatved (56°18'N., 10°52'E.), situated close NW of Rothes Grund, consists of a T-headed pier with a conveyor belt system. The berth is 100m long and has a depth of 5.3m alongside. It can handle small vessels with drafts up to 4.7m. Pilots are provided by the station at Grenaa Havn.

Hassenor (56°08'N., 10°43'E.), a low point, is located 10.7 miles SW of Glatved, at the SE extremity of Jylland. Several shoal patches, with depths of less than 5m, front this stretch of coast and lie up to about 0.5 mile seaward.

Jessens Grund (56°16'N., 10°51'E.), a detached rocky shoal, lies about 1 mile offshore, 2.6 miles SSW of Glatved. It has a least depth of 3.1m and is marked close E by a buoy.

Skelhojsgrunde (56°10'N., 10°47'E.), a detached rocky shoal bank, lies centered 2.6 miles NE of Hassenor. It has a least depth of 5m and is marked at the NW side by a lighted buoy.

Tvillingerne, a rocky shoal bank with a least depth of 4.4m, lies centered about 4.3 miles NE of Hassenor and a detached shoal patch, with a depth of 5.6m, is located about 1.3 miles N of it.

Klokkegrund (56°08'N., 10°44'E.), a detached shoal patch, lies about 0.8 mile ESE of Hassenore. It has a least depth of 2.8m and is marked close E by a buoy.

A large group of conspicuous buildings stand close S of a high bluff at Kobbergaard, 2.5 miles NNE of Hassenor. Elsegarde, a prominent wooded area, lies 1.3 miles SSW of these buildings.

A conspicuous church is situated at Draby, 4.8 miles N of Hassenor, and Karlsbjerg, a prominent hill, rises to a height of 53m about 0.5 mile SE of it.

8.21 Hjelm (56°08'N., 10°49'E.), a small island, lies 3 miles E of Hassenor. It rises to a bush-covered hill which is conspicuous from seaward. A light is shown from a prominent tower, 18m high, standing on this hill.

The SW end of the island is steep-to but the remaining shores are fronted by a coastal bank. Rocky shoals, with depths of less than 5m, lie on this bank. They extend up to 1.2 miles NE and 1.5 miles S of the light and are marked by buoys.

Bjarkesgrund (56°06'N., 10°46'E.), a sandy shoal bank with several rocky patches, lies centered 2.5 miles SSW of Hjelm Light. It has a least depth of 4m and is marked on the NW and SE sides by buoys.

Moselgrund, a sandy shoal bank with several rocky patches, lies centered 3.5 miles SSE of Hjelm Light. It has a least depth of 4.2m and is marked close S by a lighted buoy.

Ooringene (56°07'N., 10°44'E.), a small shoal bank, lies centered 2.8 miles SW of Hjelm Light. It has a least depth of 4.4m and is marked close E by a lighted buoy.

Hjelm Dyb (56°10'N., 10°45'E.), a deep passage, lies between Hjelm and the coast of Jylland.

Directions.—An inshore route, the shortest between the Kattegat and Arhus Bugt, leads through Hjelm Dyb. From a position located on Route A, about 7 miles SE of Grenaa Havn, the track leads SW for 12 miles and passes SE of Havknude Flak and Jessens Grund. Then, from a position located about 4 miles NNW of Hjelm Light, the track continues S through Hjelm Dyb, passing W of Skelhojsgrunde and E of Klokkegrund. At a position located about 1.5 miles E of Hjelm Light, the track leads SSW and passes between Ooringene and Bjarkesgrund. It then continues SSW and joins the route leading W into Arhus Bugt. This route is reported (1998) to have a least depth of 19m, lying about 2 miles SW of Hjelm Light, but elsewhere the depths are much greater.

8.22 Ebeltoft Vig (56°10'N., 10°36'E.), a large bay, is entered between Gaasehage, located 0.8 mile W of Hassenor, and Sletterhage, 6.5 miles WSW. The town and harbor of Ebeltoft are situated within a bight which indents the E side of the head of the bay. The E and N shores of the bay are mostly low, flat, and sparsely wooded, but the W shore rises rapidly to hilly inland country.

Sletterhage Light (56°06'N., 10°31'E.) is shown from a prominent tower, 16m high, standing on a point of the same name at the SW extremity of Helgenaes, a peninsula forming the SW side of the bay. Draget, a low and narrow isthmus, is located 4.3 miles NNE of the light and connects the N part of the peninsula to the mainland.

A conspicuous church stands 2.3 miles N of the light and Ellemandsbjerg, 99m high, rises 1 mile SSE of it. This hill forms



Nils Jepsen [CC BY-SA 3.0 (<https://creativecommons.org/licenses/by-sa/3.0/>)], via Wikimedia Commons

Sletterhage Light

the summit of the peninsula.

Ebeltoft Light (56°14'N., 10°36'E.) is shown from a building, 6m high, standing at the head of the bay.

A causeway, carrying a pipeline, extends SW from the shore about 0.5 mile E of the light and a pier, 130m long, projects W from its seaward end.

Trehoje, a group of three small peaks, rises to a height of 127m, 3 miles SW of Ebeltoft Light, and is prominent from seaward. A conspicuous windmill stands at Vistoft, 1 mile SW of Trehoje.

A local ferry harbor, protected by two breakwaters, is situated 1.2 miles NW of Gaasehage.

It is reported that a conspicuous group of 16 wind generators stands on a mole which projects 0.4 mile S from the shore about 0.5 mile NW of the ferry harbor.

Oreflak (56°07'N., 10°41'E.), a butterfly-shaped shoal bank, lies centered 1.3 miles S of Gaasehage and has a least depth of 3.6m.

Oreflippen, a detached shoal patch, lies about 2.4 miles S of Gaasehage. It has a least depth of 4.7m and is marked close S by a buoy.

Skadegrund (56°06'N., 10°36'E.), a detached shoal bank composed of sand and stones, lies centered 2.8 miles ENE of Sletterhage Light. It has a least depth of 1.5m and is marked by buoys on the SE and SW sides.

A shoal bank, which extends about 2 miles NW, lies with its SE end located 5.8 miles ESE of Sletterhage Light. It has a least depth of 7.5m and is marked by a lighted buoy moored at the SE end.

A shallow coastal bank fronts the E side of the bay and may best be seen on the chart. It gradually extends seaward between Gaasehage and Alhage, a point located 3.4 miles NW. This bank, which is marked by buoys, has depths of 0.6m lying at its outer edge, about 0.7 mile W and 1 mile NW of Alhage.

Anchorage, with good holding ground, is available anywhere within the bay, clear of the shoals.

Caution.—A restricted area, which may best be seen on the

chart, lies centered 5 miles SSW of Gaasehage. Anchoring, fishing, or other seabed activities are prohibited in this area due to the existence of bottom mines.

Sail boat races may take place, between April and November, within an area lying in the NE part of Ebeltoft Vig.

8.23 Ebeltoft Havn (56°12'N., 10°40'E.) (World Port Index No. 30280) fronts the town of Ebeltoft and is used mostly by fishing vessels. A conspicuous church, with a spire, stands in the town. Bogebjerg, a prominent hill, rises about 0.8 mile S of the harbor and is 47m high. Skelhoj, another prominent hill, rises 0.6 mile E of the harbor. It is 61m high; the summit is formed by two hummocks.

Depths—Limitations.—It consists of two basins protected by breakwaters. The commercial part of the harbor, known as Trafikhavn, can be approached through a channel which leads E for 2 miles. The fairway is indicated by a lighted range and has a least depth of 4.5m. The harbor entrance faces NW and is 30m wide. Vessels up to 3.8m draft can be accommodated.

The main berth is 82m in length with a depth of 3.8, alongside. A berthing length of 110m (including dolphins), and handles fast ferries, ro-ro passengers, vehicles, and rail.

Directions.—The main route into the bay leads NNW, using a white sector of Ebeltoft Light, and passes E of Skadegrund. An alternate route leads NNE, using a white sector of Ebeltoft Light, and passes W of Skadegrund.

An approach route from the SE passes SW of Oreflippen and the SW side of Oreflak. It leads NW and joins the main route passing E of Skadegrund. An alternate route leads in a W direction, using a white sector of Hjelm Light astern. It passes S of Klokkegrund and N of Oreflak.

Caution.—A designated nature reserve area fronts the harbor on either side of the approach channel. Entry into this area is subject to numerous special regulations.

Arhus Bugt

8.24 Arhus Bugt (56°03'N., 10°23'E.) is that part of the Kattegat lying W of a line extending between Sletterhage Light

(56°06'N., 10°31'E.) and Issehoved, 6 miles SSE. It is bordered on the S side by Tuno Island (55°57'N., 10°26'E.) and the adjacent shallows.

The greater part of Arhus Bugt has general depths of 13 to 18m and provides secure anchorage over a bottom of stiff mud, with a layer of sand in places.

For directions leading into Arhus Bugt, see paragraph 8.29.

Lillegrund (56°03'N., 10°32'E.), a small shoal bank, lies 3 miles S of Sletterhage Light. It has a least depth of 1.3m and is marked close E by a buoy.

Mejlflak (56°03'N., 10°27'E.), a large shoal bank, lies centered 3 miles SSW of Sletterhage Light. It has depths of 0.6 to 4.7m and is marked at the W side by a buoy.

Several shoal patches, with depths of less than 10m, lie between Mejlflak and Sletterhage Light. A lighted buoy, moored about 0.6 mile S of the light, marks the N extremity of these patches.

Wulffs Flak, a small shoal bank, lies about 4.8 miles W of Sletterhage Light. It has a least depth of 6.5m and is marked at the SW side by a buoy.

Begtrup Vig (56°09'N., 10°28'E.), a small bay, lies 4 miles NNW of Sletterhage Light at the NW side of Helgenaes. A number of detached shoal patches, with depths of less than 6m, lie near the middle of its entrance. This bay provides anchorage to small vessels but is of no commercial importance.

Skodshoved (56°12'N., 10°21'E.), a steep promontory, is located 8.2 miles NW of Sletterhage Light and surmounted by a prominent small hill. The coast in this vicinity is flat.

Skodshoved Flak, a sandy flat, extends NNW for about 0.7 mile from the N side of this promontory. It has depths of 0.3 to 0.6m and is marked at the W side by a buoy.

A detached shoal patch, with a least depth of 6.2m, lies about 1.6 miles SW of Skodshoved and is marked close W by a lighted buoy.

Ryes Flak, also known as Vejlbj Flak, lies centered 2.7 miles WSW of Skodshoved. This shoal area, a former dumping ground, has a least depth of 2.8m. A detached shoal patch, with a depth of 8.6m, lies about 0.8 mile S of the S end of Ryes Flak and close N of the approach channel leading to Arhus.



Aarhus

Kalo Vig (56°15'N., 10°25'E.), a sheltered bay, is entered between Skodshoved and Vejlbj Hage, 2.2 miles W, and extends about 8 miles NE. Knebel Vig and Egens Vig, two small bays, lie along its E side but are of no commercial significance. The shores of the bay are mainly flat but rise to high and partly-wooded country farther inland. Numerous churches, with prominent spires, stand in the villages which surround the bay.

A tongue of the coastal bank extends up to about 2.5 miles NE of the N side of Skodshoved. It has depths of 1.8 to 5.2m and is marked by buoys at the NW and NE sides.

8.25 Studstrup Havn (56°16'N., 10°20'E.) (World Port Index No. 30285), a private facility serving a power station, is situated on the W side of Kalvo Vig, 4 miles N of Skodshoved.

The facilities consist of a dredged basin and a quay, 495m long. The entrance channel leads NW and has a least depth of 11.3m. Vessels up to 245m in length, 33m beam, and 11m draft (10m for tankers) can be handled alongside.

A conspicuous chimney stands at the power station. The entrance channel is indicated by a lighted range and marked by lighted buoys. An approach lighted buoy is moored about 0.7 mile SE of the quay.

Depths—Limitations.—The harbor of Studstrup, also known as Studstrupvaerkets Havn, can handle vessels up to 245m in length, 11m draft, and 33m in beam. Studstrupvaerket Quay is 490m in length with an alongside depth of 11.3m. Vessels up to 245m in length, 10.7m draft, and 33m beam can be accommodated. The waterline to hatch coaming height is 14m. Dirty products, cement, multipurpose, and wood chips are handled at the quay.

Pilotage.—Pilotage is compulsory. Pilots can be contacted by VHF and board about 1.5 miles E of Aarhus.

Pilots board in position 56°09'N, 10°17'E.

Regulations.—Small craft can enter Kalvo Vig on either side of this area but the depths are only 3m or less. A channel for commercial vessels proceeding to Studstrup Havn leads through the E part of the area. Vessels must receive permission from the harbor authorities prior to transiting this channel. It is reported that vessels over 5,000 dwt may pass through the area only during daylight and all vessels must have an underkeel clearance of at least 2m.

Contact Information.—The port can be contacted by telephone (45-87-491700).

Anchorage.—Anchorage, with good holding ground, can be taken throughout most of Kalo Vig, except in its innermost part.

Caution.—A prohibited area, in which explosives are dumped, lies centered 1.2 miles NW of Skodshoved. This area, which is marked by buoys, extends across the greater part of the entrance to Kalvo Vig and may best be seen on the chart.

Aarhus (Aarhus) (56°09'N., 10°13'E.)

World Port Index No. 30260

8.26 Aarhus, a large commercial port, is situated on the W side of Aarhus Bugt, about 10.5 miles WNW of Sletterhage Light.

The port complex, which provides about 7.5 miles of quayage, is protected by breakwaters and consists of three main har-

bor areas, Osthaven, Nordhavn, and Sydhavn. Port expansion and land reclamation efforts are underway since 2018.

Tides—Currents.—The tidal range is about 0.3m. Strong winds from W and NW may raise the water level by up to 1m while strong SE winds may lower it by about the same level.

Aarhus Aa, a small river, flows into the S end of Nordhavn, causes a slight outward set along the E quays.

Depths—Limitations.—The approach channel, which may best be seen on the chart, leads WNW and has a least depth of 14m. The entrance channel leading SW into Osthaven has a least depth of 14m and the entrance channel leading WSW into Nordhavn has a least depth of 11m.

Nordhavn, located in the NW part of the port, consists of Basin No. 1, Basin No. 2, Basin No. 5, and Basin No. 7.

Sydhavn is located at the W side of the port and is entered from Nordhavn. It consists of Basin No. 3, Basin No. 4, and Basin No. 6.

Osthaven is located in the S part of the port. It consists of Basin No. 9, Basin No. 10, Basin No. 11, and Basin No. 12. A new ferry port (2020) is located at the old Basin No. 13, on the SE side of the new container terminal.

There are facilities for general cargo, ro-ro, ferry, container, bulk, and tanker vessels. Vessels up to 214,121 dwt, 450m in length, 59m beam, and 15m draft can be accommodated in the port.

For more berthing information see the table titled **Aarhus—Berth Information**.

Aspect.—An outer approach lighted buoy, equipped with a racon, is moored about 1.7 miles E of the harbor. The approach channel is indicated by lighted ranges, which may best be seen on the chart.

Aarhus Cathedral stands at the W side of the harbor and is conspicuous. St. Johannes Church, with a prominent spire, is situated about 0.7 mile N of the cathedral and a conspicuous water tower stands 1 mile NNW of it. Several conspicuous tanks and silos stand in the vicinity of Osthavn.

Pilotage.—Pilotage is compulsory for tankers carrying flammable liquids with a flashpoint below 23°C when arriving or departing. Vessels requiring a harbor pilot must contact the port at least 2 hours prior to arrival, even if a sea pilot is on board. Harbor pilots can be contacted by VHF and board about 2 miles SE of the harbor entrance (56°08.7'N., 10°18.0'E.).

For further information, see Pilotage in paragraph 7.1.

Regulations.—Vessels crossing the channels leading into the harbors must give way to all vessels proceeding through them. Sailboats must give way to vessels in the harbor channels.

Entry to Basin 7 is restricted to its NE part.

Contact Information.—See the table titled **Aarhus—Contact Information**.

Anchorage.—Anchorage can be taken, in depths of 12 to 14m, within an area lying centered 1 mile S of the outer approach lighted buoy.

Caution.—An outfall pipeline, which may best be seen on the chart, extends about 1.3 miles E from the S end of the harbor.

It is reported that construction work is being carried out within an area located in the S part of the port, near the container terminal.

Sailboat races may take place, between April and November,

within an area fronting the shore close S of the port.

High-speed ferries may be encountered in the approaches to the port.

SW side of Aarhus Bugt, is steep and wooded. Marselisborg Castle, a large white building with a flagstaff, stands about 2 miles S of the cathedral at Aarhus and is conspicuous from seaward.

8.27 The coast extending S for 6 miles from Aarhus, at the

Aarhus—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
Aarhus Kornpier (Dlg Grain Pier)							
No. 119	96m	8.3m	99.8m	—	15.0m	4,570 dwt	Continuous berthing length of 192m. Grain, breakbulk, bunkers, and cruise. 3,189 gt. Principally for gains, but berth sometimes used for cruise vessel traffic because of nearby access to tourist facilities.
No. 121	96m	8.3m	87.9m	—	12.3m	4,068 dwt	Continuous berthing length of 192m. Grain, breakbulk, and bunkers. 2,395 gt.
No. 123	167m	8.5m	—	—	—	—	Grain, breakbulk, and bunkers.
No. 125	148m	9.0m	—	—	—	—	Grain, breakbulk, and bunkers.
APM Aarhus Container Terminal							
No. 404	100m	—	237m	15.0m	32.2m	61,213 dwt	Containers, project/heavy cargo, steel products, breakbulk, bunkers, and reefer. 37,398 gt and 3,460teu.
No. 406	100m	—	243.3m	15.0m	32.2m	47,120 dwt	Containers, project/heavy cargo, steel products, breakbulk, bunkers, and reefer. 37,398 gt and 3,424 teu.
No. 408	100m	—	243.1m	15.0m	32.2m	46,975 dwt	Continuous berthing length: 1,300m. Containers, breakbulk, bunkers, project/heavy cargo, steel products, and reefer. 37,113 gt and 3,430TEU.
No. 410	100m	—	237m	15.0m	32.2m	46,852 dwt	Containers, project/heavy cargo, breakbulk, bunkers, and steel products. 37,071 gt and 3,007 teu.
No. 412	100m	—	281m	15.0m	40.0m	37,564 dwt	Containers, project/heavy cargo, breakbulk, bunkers, and steel products. 69,132 gt and 5,762 teu.
No. 414	100m	—	450m	15.0m	59.0m	213,971 dwt	Containers, project/heavy cargo, breakbulk, bunkers, and steel products. 194,849 gt and 19,472teu.
No. 416	100m	—	450m	15.0m	59.0m	214,121 dwt	Containers, project/heavy cargo, breakbulk, bunkers, and steel products. 214,286 gt and 20,568 teu.
No. 418	100m	—	450m	15.0m	59.0m	214,212 dwt	Containers, project/heavy cargo, breakbulk, bunkers, and steel products. 214,286 gt and 20,568 teu.
No. 420	100m	—	450m	15.0m	59.0m	214,212 dwt	Containers, project/heavy cargo, breakbulk, bunkers, and steel products. 214,286 gt and 20,568 teu.
No. 422	100m	—	450m	15.0m	59.0m	20,148 dwt	Containers, project/heavy cargo, breakbulk, bunkers, and steel products. 194,308 gt and 19,224 teu.

Aarhus—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
No. 424	100m	—	179.4m	15.0m	30.9m	25,726 dwt	Containers, project/heavy cargo, breakbulk, bunkers, and steel products. 26,169 gt and 2,150 teu.
No. 426	100m	—	179m	15.0m	30.9m	25,690 dwt	Containers, project/heavy cargo, breakbulk, bunkers, and steel products. 26,169 gt and 2,15 teu.
No. 428	100m	—	179m	15.0m	30.9m	25,690 dwt	Containers, project/heavy cargo, breakbulk, bunkers, and steel products. 26,169 gt and 2,15 teu.
Note.—Berths 404-428 have a continuous berthing length of 1,300m.							
Ro-Ro 1	24m	—	141m	15.0m	—	—	Ro-ro/lo-lo and bunkers.
Ro-Ro 2	45m	14.0m	—	15.0m	—	—	
Basin 2 (Nordhavngade)							
No. 27	—	—	19.4m	—	5.0m	—	Continuous berthing length: 312m. Fishing vessels, breakbulk, project/heavy cargo, and bunkers. Mainly used for work boats. Visiting specialist vessels. 100 gt.
No. 29	104m	7.5m	—	—	—	—	
Basin 3 (Slippen SW Side)							
No. 102	110m	6.9m	—	—	—	—	Continuous berthing length of 330m. Cement, breakbulk, bunkers, and aggregates. Slip berth is 13m wide.
No. 104	110m	6.9m	90m	—	—	—	
No. 106	110m	6.9m	—	—	—	—	
No. 108	217m	7.5m	89.9m	—	13.6m	4,113 dwt	Animal feeds, fertilizer, bunkers, and breakbulk. Entrance to slippen. 2,863 gt.
Basin 7							
No. 75	100m	10.0m	73.8m	—	11.5m	2,165 dwt	Cement, bunkers, and breakbulk. 1,524 gt.
No. 77	157m	10.0m	122.3m	—	18.2m	8,660 dwt	Continuous berthing length of 314m. Aggregates, cement, bunkers, breakbulk, and steel products. 5,574 gt.
No. 79	157m	—	126.1m	—	16.5m	8,493 dwt	
No. 81	82m	10.0m	—	—	—	—	Closed. Continuous berthing length of 164m. Cement, bunkers, and breakbulk.
No. 83	82m	10.0m	—	—	—	—	
No. 85	129m	10.0m	—	—	—	—	Closed. Continuous berthing length of 387m. Aggregates, project/heavy cargo, sand, and steel products. Project cargo for port development at Pier 4.
No. 87	129m	10.0m	—	—	—	—	
No. 89	129m	10.0m	—	—	—	—	
Bulk and Multi Terminal							
No. 301	93m	13.5m	180m	—	30.0m	39,128 dwt	Continuous berthing length: 560m. Project/heavy, container, bunkers, and breakbulk. 24,785 gt and 1,040 teu.
No. 303	93m	13.5m	217.9m	—	30.6m	40,445 dwt	Continuous berthing length: 560m. Ro-ro/lo-lo, container, bunkers, project/heavy and breakbulk. 33,816 gt and 962 teu.
No. 304	113m	13.5m	187m	—	26.5m	20,406 dwt	Continuous berthing length: 906m. Animal feeds, container, project/heavy, breakbulk, bunkers, ro-ro/lo-lo, fertilizer, and grain. 25,732 gt and 1,300 teu.

Aarhus—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
No. 305	93m	13.5m	217m	—	30.0m	36,599 dwt	Continuous berthing length: 560m. Animal feeds, breakbulk, and bunkers, fertilizer, and grain. 23,456 gt and 962 teu.
No. 306	93m	13.5m	187m	—	26.5m	14,595 dwt	Continuous berthing length: 906m. Animal feeds, vegetable oil, ro-ro/lo-lo, bunkers, and breakbulk, multipurpose, fertilizer, and grain. Displacement: 21,718 gt, 25,732 gt, and 475 teu.
No. 307	93m	13.5m	217.9m	—	32.2m	58,451 dwt	Continuous berthing length: 560m. Animal feeds, ro-ro/lo-lo, container, breakbulk, and bunkers, fertilizer, and grain. 34,456 gt and 962 teu.
No. 308	226m	13.5m	217.9m	12.4m	26.5m	14,500 dwt	Continuous berthing length: 906m. Grain, others, project/heavy, container, ro-ro/lo-lo, steel products, breakbulk, multipurpose, and bunkers. 33,816 gt and 630 teu.
No. 309	94m	13.5m	180m	—	30.0m	37,666 dwt	Continuous berthing length: 560m. Animal feeds, breakbulk, bunkers, fertilizer, and grain. 24,199 gt and 959 teu.
No. 310	113m	13.5m	229m	—	32.2m	81,354 dwt	Continuous berthing length of 906m. Grain, project/heavy, container, bunkers, and breakbulk. 44,336 gt and 962 teu.
No. 311	94m	13.5m	228.9m	—	32.2m	81,703 dwt	Continuous berthing length of 560m. Animal feeds, breakbulk, bunkers, fertilizer, and grain. 43,044 gt.
No. 312	113m	13.5m	228.9m	—	32.2m	82,177 dwt	Continuous berthing length of 906m. Grain, container, bunkers, and breakbulk. 42,930 gt and 390 teu.
No. 314	113m	13.5m	118m	—	15.2m	6,663 dwt	Continuous berthing length of 906m. Scrap metal, others, project/heavy cargo, steel products, bunkers, and breakbulk. 4,871 gt.
No. 316	113m	13.5m	118m	—	30.9m	7,120 dwt	Continuous berthing length of 906m. Coal, limestone, breakbulk, and bunkers. 26,169 gt.
No. 318	114m	13.5m	229m	—	32.2m	80,300 dwt	Continuous berthing length: 906m. Coal, limestone, breakbulk, and bunkers. 43,717 gt.
No. 320	114m	13.5m	254.3m	—	43.0m	102,566 dwt	Continuous berthing length of 906m. Coal, limestone, breakbulk, and bunkers. 66,786 gt.
No. 322	125m	13.5m	107m	—	—	—	Continuous berthing length: 125m. Coal, breakbulk, and bunkers.
No. 324	125m	13.5m	99.9m	—	15.2m	—	Continuous berthing length: 125m. Coal, breakbulk, and bunkers. 2,999 gt.
No. 326	32m	13.5m	101.4m	—	14.9m	6,358 dwt	Coal, breakbulk, and bunkers. Working vessels. 4,503 gt.
Faerge (Ferry) Terminal Pier 3							

Aarhus—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
No. 45	58m	7.5m	—	—	—	—	Continuous berthing length of 116m. Bunkers and breakbulk.
No. 47	58m	7.5m	—	—	—	—	Continuous berthing length of 116m. Bunkers and breakbulk.
No. 49	—	7.5m	—	—	—	—	Continuous berthing length of 190m. Ro/pax and bunkers.
No. 51	—	7.5m	—	—	—	—	
No. 53	33m	—	—	—	—	—	Closed. Pier end.
No. 67	130m	6.0m	—	—	—	—	Continuous berthing length of 130m. Ro/pax and bunkers. Ro-ro berth (fore, aft, and side access ramps). Vehicles and passengers for Aarhus and Kalundborg. Kattegat-Ruten took over from Mols Linien in 2011.
No. 71	70m	8.0m	—	—	—	—	Continuous berthing length of 70m. Ro/pax and bunkers. Ro-ro berth (fore, aft, and side access ramps). Vehicles and passengers for Aarhus Sjaellands Odde route.
Mellemarmen (NW Side)							
No. 6	57m	5.5m	—	—	—	—	Continuous berthing length of 114m. Project/heavy cargo. Used by work boats.
No. 8	57m	5.5m	—	—	—	—	Continuous berthing length of 114m. Used by work boats.
No. 10	106m	5.5m	26m	—	—	—	Continuous berthing length of 212m. Project/heavy cargo and breakbulk.
No. 12	106m	5.5m	—	—	—	—	Continuous berthing length of 194m. Breakbulk.
No. 14	97m	5.5m	—	—	—	—	Continuous berthing length: 194m. Project/heavy cargo and breakbulk.
No. 16	97m	5.5m	—	—	—	—	Continuous berthing length of 194m. Project/heavy cargo and breakbulk.
No. 18	17m	5.5m	—	—	—	—	Closed. Ro-ro/lo-lo. Used for repair and build of luxury yachts and cruisers. Ro-ro together with Berth No. 16.
No. 20	110m	5.5m	—	—	—	—	Continuous berthing length: 110m. Steel products. Repair and build berth of luxury yachts and cruisers.
Mallemarmen (Repair Yard)							
No. 133	200m	9.0m	290m	—	—	—	Project/heavy, bunkers, and steel products. Berth for floating drydock with twin ro-ro ramp access.
No. 135	130m	7.0m	—	—	—	—	Continuous berthing length of 130m. Project/heavy cargo, bunkers, and steel products. SE side inspection dock.
No. 139	125m	7.0m	—	—	—	—	Continuous berthing length of 125m. Project/heavy cargo, bunkers, and steel products. NW side inspection dock.

Aarhus—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
No. 145	50m	7.0m	—	—	—	—	Continuous berthing length of 110m. Project/heavy cargo, bunkers, and steel products.
Mallemarmen (SE Side Cruise Terminal) Basin 4							
No. 129	169m	13.5m	90m	—	—	—	Continuous berthing length of 338m. Cruise vessels, bunkers, and breakbulk.
No. 131	169m	13.5m	138m	—	—	—	
Mallemarmen (SE Side) Basin 3							
No. 113	—	8.3m	87.9m	8.0m	12.8m	3,720 dwt	Continuous berthing length of 240m. Breakbulk, ro/pax, project/heavy, and bunkers. 2,446 gt.
No. 115	—	8.3m	87.9m	8.0m	12.8m	3,720 dwt	
Pier 2 (Skanegade)							
No. 35	126m	7.5m	—	—	—	—	Closed. Continuous berthing length of 254m. Project/heavy, bunkers, and breakbulk.
No. 37	67m	8.0m	—	—	—	—	Closed. Continuous berthing length of 134m. Breakbulk and bunkers.
No. 39	67m	8.0m	—	—	—	—	Continuous berthing length of 134m. Breakbulk and bunkers.
No. 41	156m	9.0m	198m	—	—	—	Closed. Continuous berthing length: 312m. Fast ferry and breakbulk.
No. 43	156m	9.0m	—	—	—	—	
Aarhus Karishamn AB							
No. 103	—	6.9m	89.9m	—	13.6m	4,267 dwt	Continuous berthing length of 180m. Located in Slippen Basin 3. 2,863 gt.
No. 105	—	6.9m	89.9m	—	13.6m	4,267 dwt	Continuous berthing length of 180m. Breakbulk and bunkers. Located in Slippen Basin 3. 2,863 gt.
No. 107	136m	7.3m	90m	6.8m	—	3,000 dwt	Petroleum products, breakbulk, multipurpose, and bunkers. Breaking load 20kn and 15m between bollards.
No. 109	131m	10.0m	170m	9.5m	24.6m	22,413 dwt	Vegetable oils and bunkers. Displacement: 28,565t. Breaking load 20kn and 15m between bollards.
Oliehavsvej (Oil Port)							
No. 110	200m	7.5m	116.9m	7m	18.0m	6,719 dwt	Dirty products. Displacement: 5,046t. Now part of Oliehavsvej (Oil Port).
No. 112	100m	7.5m	132.5m	—	18.0m	11,023 dwt	Continuous berthing length of 200m. Dirty products, breakbulk, bunkers, containers, and multipurpose. 6,687 gt and 356 teu.
No. 114	100m	7.5m	132.6m	—	15.8m	11,047 dwt	Continuous berthing length of 200m. Breakbulk and bunkers. 6,687 gt.
No. 116	—	8.5m	45.9m	8.0m	9.6m	708 dwt	Continuous berthing length of 186m. Breakbulk, sand, dirty products, multipurpose, and bunkers.
No. 118	—	8.5m	45.9m	8.0m	9.6m	708 dwt	Continuous berthing length of 186m. Breakbulk, sand, clean products, multipurpose, and bunkers.

Aarhus—Berth Information							
Berth	Length	Depth	Maximum Vessel				Remarks
			LOA	Draft	Beam	Size	
No. 120	—	—	—	—	—	—	Vegetable oil, breakbulk, bunkers, clean products, and multipurpose.
No. 124	125m	13.5m	183m	—	32.2m	51,527 dwt	Vegetable oil, breakbulk, bunkers, clean products, and multipurpose. Displacement: 61,419t. 29,733 gt.
No. 128	126m	10.0m	118m	9.5m	18.5m	8,985 dwt	Breakbulk, clean products, bunkers, and multipurpose. Displacement: 12,855t. 6,382 gt.
No. 130	100m	8.5m	—	—	—	—	Project/heavy cargo, bunkers, and steel products. Pier-head berth used for floating heavy life cranes and machinery.
No. 201	119m	8.5m	90.9m	8.0m	15.6m	4,449 dwt	Aviation fuel, petroleum products, LPG, and bunkers. Displacement: 6,499t. Breaking load 20kn and 15m between bollards.
No. 202	130m	8.0m	80m	7.5m	—	—	Aviation fuel, petroleum products, and bunkers. Breaking load 20kn and 15m between bollards.
No. 204	210m	—	175.6m	—	26.0m	33,171 dwt	Others, sand, breakbulk, and bunkers. 20,312 gt.
No. 206	30m	—	—	—	—	—	Sand and bunkers.
No. 313	100m	12.0m	184.2m	11.5m	32.2m	53,160 dwt	Chemicals, clean products, vegetable oils, and bunkers. Displacement: 64,306t.
Samtank (Aarhus Oliehavnsvej)							
No. 122	125m	10.0m	179.4m	9.5m	30.0m	25,726 dwt	Chemicals, clean products, and bunkers. Displacement: 33,788t. Breaking load 20kn and 15m between bollards.
No. 203	85m	11.0m	149.9m	10.5m	23.0m	18,736 dwt	Petroleum products, vegetable oils, and bunkers. Displacement: 24,700t. Breaking load 20kn and 15m between bollards.

Aarhus—Contact Information	
Port	
VHF	VHF channels 12, 13, and 16
Telephone	45-86-133266
Facsimile	45-86-127662
E-mail	port@aarhus.dk
Web site	https://www.aarhushavn.dk
Harbor Pilots (Private)	
Telephone	45-89-368252

Abelshoved (56°06'N., 10°15'E.), located 4 miles SSE of Aarhus, is a conspicuous yellow point, 20m high. A prominent radio mast, 213m high, is situated about 1.2 miles WNW of this point. It displays an aeronautical light and stands at an elevation of 317m.

A large yellow warehouse building is situated at Norsminde, 4.2 miles S of Abelshoved, and is prominent from seaward.

Dyngby Hoved (55°58'N., 10°16'E.), a point located 4 miles S of Norsminde, has a conspicuous white church, with a red roof, situated 1 mile NW of it.

Hesbjerg Grund, a coastal bank, extends up to about 1 mile offshore at the N side of the entrance to Norsminde Fjord (56°01'N., 10°16'E.). It has depths of less than 6m and is marked at the E side by a buoy.

Kysing Hage, a spit, extends about 1 mile NE from Kysing Naes, the S entrance point of Norsminde Fjord. It has a least depth of 1.8m and is marked by a buoy.

Norsminde Flak (56°02'N., 10°19'E.), a narrow shoal bank, lies centered 2 miles ENE of the entrance to Norsminde Fjord and parallel to the coast. It has depths of 2.2 to 5.4m and is marked by buoys at the E and W sides.

The coastal bank, with depths of less than 6m, extends up to about 0.5 mile NE of Dyngby Hoved. Dyngby Hage, a detached shoal patch, lies about 0.7 mile ENE of Dyngby Hoved and has a least depth of 5.6m.

8.28 Tuno Island (55°57'N., 10°26'E.), a small island, lies



Aarhus—Container Terminal

5.5 miles E of Dyngby Hoved. Its summit, 24m high, rises in the SW part. The E and W parts of the island are low. A light is shown from a white church tower, 18m high, standing on the E part of the island. It is reported (1998) that trees surround the church and stand close E of it.



Tuno Light

Tuno Havn, a small harbor, is located at the SE side of the island and protected by two breakwaters. It is used only by local ferries and small craft.

A shoal bank, with depths of less than 10m, surrounds the island and extends up to about 2 miles N and 1.1 miles S of the light. Tuno Ron, a narrow sand spit, extends about 0.6 mile ENE from the E end of the island. Its outer part dries and is marked by a lighted buoy.

Kirkegrund, a small detached shoal bank, lies about 2 miles S of the W end of Tuno. It has a least depth of 3.1m and is marked by a buoy.

Tuno Knob (55°58'N., 10°22'E.), a narrow and above-water sand bank, lies centered about 1.5 miles W of the W end of Tuno Island and on a large shoal bank. The shoal bank extends up to about 0.9 mile N and S of the sand bank. It has depths of 2 to

5m and is marked on the NE and W sides by buoys.

A windfarm area, in which 10 wind generators stand, is located in the vicinity of this shoal bank. The wind generators are floodlit and prominent.

Aschehougs Flak (55°58'N., 10°19'E.), a group of shoal patches, occupies the greater part of the passage lying between the W side of Tuno Knob and Dyngby Hage, 2.6 miles W. These shoal patches have a least depth of 3.4m and may best be seen on the chart.

Caution.—A prohibited area, within which lies a wreck with live ammunition, covers most of the shoal bank surrounding Tuno Knob. It is marked by buoys at the corners and may best be seen on the chart.

8.29 A number of small harbors lie within Arhus Bugt and are used only by fishing vessels, small craft, local ferries, and pleasure boats. The main harbors include the following:

1. Skodshoved Havn (56°11'N., 10°23'E.).
2. Ega Marina (56°12.6'N., 10°17.5'E.).
3. Kalovig Badehavn (56°14.6'N., 10°20.7'E.).
4. Nappedam Lystbadehavn (56°16.7'N., 10°29.7'E.).
5. Norsminde (56°01.4'N., 10°15.8'E.).

Tides—Currents.—The current in Arhus Bugt usually sets N and attains its greatest velocity in that direction but gales from NE, commencing without warning, may cause a strong set in the opposite direction.

The N current sets along the E coast of Jylland as far as Arhus and then sets E towards Mols Hoved (56°10'N., 10°24'E.). It then sets S along the W side of Helgenaes and meets the current flowing N between Sameso and Tuno Island. The united current then sets across the entrance to Ebeltoft Vig and toward Hjelm. The S current sets in the opposite direction as far as a line projecting between Sletterhage Light and Mejlgrund (56°03'N., 10°27'E.). It gradually decreases in velocity to the W of this line but continues in the opposite direction to the N current.

Directions.—The main approach route into Arhus Bugt leads from E in a WNW direction and passes close SSW of Sletterhage Light (56°06'N., 10°31'E.).

An alternate route from S leads in a N direction and passes between Svanegrund (55°50'N., 10°25'E.) and Tuno Island (55°57'N., 10°26'E.), on the W side, and the W coast of Samsø, on the E side. From a position located about 2 miles NE of Tuno Light, a track leads NE into the Kattegat, passing between Lillegrund (56°03'N., 10°32'E.) and Issehoved Flak (56°01'N., 10°34'E.), while another track leads NW and NNW into Arhus Bugt.

The narrow channels lying W of Tuno Island are used only by coasters and small craft with local knowledge.

Caution.—Restricted areas, which may best be seen on the chart, lie centered 4 miles NNW of Sletterhage Light and 1.8 miles S of Skodshoved. Anchoring, fishing, or other seabed activities are prohibited in these areas due to the existence of bottom mines.

Several submarine cables, which may best be seen on the chart, extend between the SW shore of Arhus Bugt, Tuno Island, and the NW side of Samsø.

Arhus Bugt to Lille Baelt and Store Baelt

8.30 The coast between Dyngby Hoved (55°58'N., 10°16'E.) and Bjornsknude, about 17 miles SSW, is indented by several small bights and fronted by an extensive shoal area, on which lie several small islets and islands.

Hov Havn (55°55'N., 10°15'E.), situated 3 miles S of Dyngby Hoved, consists of a yacht basin and a local ferry basin, both protected by breakwaters. The harbor has a controlling depth of 3.7m, but is subject to silting, and can accommodate vessels up to 40m in length and 6m beam. A prominent church stands at Halling, 1.6 miles NW of the harbor.

Hov Ron, a narrow sand bank, lies 0.9 mile SE of Hov Havn and on the S part of a large detached shoal flat, which may best be seen on the chart. The shoal flat, with depths of less than 4m, extends up to about 1 mile N, 1 mile NE, and 0.8 mile SE of Hov Ron. It is marked close N by a lighted buoy and close NE by a buoy.

Hov Lob, a narrow channel, lies about 0.4 mile E of Hov Havn. It is marked by buoys and leads between the coastal bank and the W side of the shoal flat. This channel has a controlling depth of 3.7m and provides access to Hov Havn.

Several detached shoal patches, with depths of less than 10m, lie up to about 4 miles ESE and SE of Hov Havn and may best be seen on the chart.

Kalsenakke (55°50'N., 10°12'E.), a point lying at the S end of Gylling Naes, is situated 5 miles SSW of Hov Havn. The coast between is flat and partly wooded. A prominent silo stands about 1.7 miles NW of this point.

A shallow coastal bank fronts the shore between Hov Havn and Kalsenakke. It has depths of less than 4m and extends up to about 2 miles seaward.

Sogrund, an extension of the coastal bank, projects SE and its seaward extremity lies about 4.6 miles E of Kalsenakke. This shoal bank has depths of less than 3m and is marked on the S side by a buoy.

Skomagergrund, a shoal flat, lies centered 1.2 miles SW of Kalsenakke, on the coastal bank. It has a least depth of 2.2m and is marked on the SE side by a buoy.

8.31 Svanegrund (55°50'N., 10°25'E.), a large area of dry-

ing flats and shoals with depths of less than 5m, lies centered 6.5 mile E of Kalsenakke and may best be seen on the chart. Its W end is joined to the E side of Sogrund. Its E end lies about 10 miles E of Kalsenakke and is marked by a buoy. A narrow spit, with depths of less than 5m, extends NNW for about 1.5 miles from the W end of this area and is marked by a buoy.

Endelave (55°45'N., 10°19'E.), a flat and low island, lies 6 miles SE of Kalsenakke. A prominent church stands in a village on the NW side of the island. A conspicuous wooded grove is situated in the SE corner of the island. A small craft harbor fronts the village and consists of a basin connected to the shore by a stone causeway, 300m long.

A coastal bank, with depths of less than 5m, surrounds the island and may best be seen on the chart. It extends up to about 0.9 mile seaward on the S and E sides, up to about 2 miles seaward on the W side, and up to about 3.2 miles seaward on the NW side. A spit, with depths of less than 2m, extends about 1.7 miles N from the N end of the island. Its extremity, which is marked by a buoy, lies close S of the SE end of Sogrund.

Caution.—Nature reserve areas are situated in the vicinity of the drying flats on Hov Ron and Svanegrund and on the coastal bank extending NW from Endelave.

Several submarine cables extend WNW between the W side of Samsø and a point on the shore located close N of Hov Havn. Two submarine cables extend W to the mainland shore from the W end of Endelave.

8.32 Horsens Fjord (55°50'N., 10°05'E.) is entered between Kalsenakke and Hundshage, 4.7 miles WSW, and extends W for about 10 miles. The land on both sides of the fjord rises abruptly to high, wooded hills, but descends gradually to fairly low terrain near the head.

The greater part of the entrance and the fjord is obstructed by a shallow shoal flat, which may best be seen on the chart. Sondergrund, a detached shoal bank, lies about 0.8 mile ESE of Hundshage. It has a least depth of 4.7m and is marked by a buoy.

Hjarno (55°50'N., 10°05'E.), a small island, lies on the shoal flat, 1 mile NNE of Hundshage. A conspicuous church stands near the shore on its SW side. Alro, an island, lies on the shoal flat, 1 mile N of Hjarno, and a prominent church stands near its center. This island is connected to the mainland at its E end by a dam. Both of these islands are low, well built over, and partly wooded.

Borre, a peninsula, extends about 1.2 miles N from the S side of the fjord, 2 miles NW of Hundshage. It is narrow and marked by a bare hummock. Borresknob, an islet, lies close off the N end of this peninsula and is marked by a beacon. Saelgrund, a shallow shoal, extends W for about 1 mile from this islet.

A large conspicuous warehouse stands in the vicinity of Snaptun, about 1 mile NNW of Hundshage. A prominent church is situated on the N shore at Sovind, about 5.5 miles NNW of Hundshage, but is visible only from inside the fjord.

Tides—Currents.—The tidal range is about 0.4m. Under normal conditions, the tidal currents within the fjord change about every 6 hours, setting in the direction of the fairway channel at a rate of about 1 knot. During storms, the currents in the channel leading between the mainland and the islands of Hjarno and Alro may attain rates of 2.5 to 3 knots and may set

in the same direction for up to 12 hours. Gales from N to NW may increase the water level in the fjord by up to 1.5m and gales from S to SW may reduce it by as much as 1m.

Depths—Limitations.—Hjarno Sund and Draget form the main entrance channel leading into the fjord. This channel passes close W of Sondergrund and leads in a NW direction between the coastal bank fronting Hundshage and the SW side of Hjarno. Draget is that part of the channel leading NW between the SW end of Alro and the N end of Borre. Depths of 12 to 21m lie within Hjarno Sund and Draget.

From a position located about 0.7 mile NW of the N end of Borre, the channel continues in a SW direction for about 1 mile to the outer entrance of the dredged fairway. The reaches of this channel are indicated by lighted ranges. An uncharted obstruction, with a depth of 6.1m over it, was reported (2020) to lie just S of the channel's dog leg turn from the NW to the SW. Mariners should use caution navigating this turn.

The dredged fairway, 32m wide, leads in a W direction for 3.8 miles to the head of the fjord. It is marked by buoys on the N side and has a controlling depth of 6.9m.

Caution.—Several nature reserve areas are situated adjacent to the main channel in Horsens Fjord. Entry into these areas is subject to numerous special regulations.

A number of marine fish farms are situated adjacent to the main channel in Horsens Fjord.

A local ferry runs between Snaptun and the island of Hjarno.



Horsens

8.33 Horsens (55°52'N., 9°52'E.) (World Port Index No. 30230), an ice-free port, fronts the town at the head of the fjord. The harbor consists of a main commercial basin protected by two short breakwaters. There are also extensive facilities for yachts and fishing vessels.

Depths—Limitations.—The harbor entrance is 65m wide and has a controlling depth of 6.3m. The oil berth is located at the N side of the outer part of the basin. There are facilities for general cargo, passenger ferry, bulk, and tanker vessels. Vessels up to 152.4m in length, 21.3m beam, and 6.9m draft can be accommodated. For more berthing information see the table titled **Horsens—Berth Information**.

Pilotage.—Pilots for Horsens Fjord may be contacted by VHF and board near S of Lillegrund (55°43.0'N., 10°08.0'E.).

For further information, see Pilotage in paragraph 7.1.

Horsens—Berth Information			
Berth	Length	Depth	Remarks
Horsens Dry Terminal			
No. 1	74m	4.2m	Passengers.
No. 2	185m	5.6m	Cargo.
No. 3	120m	6.3m	Cargo.
No. 4	90m	6.3m	Cargo, coke, and sand.
No. 5	120m	6.3m	Cargo, grain, and sand.
No. 6	100m	6.3m	Cargo, coal, sand, timber, and iron ore.
No. 8	160m	6.3m	Cargo, coal, sand, and iron ore.
No. 10	115m	6.9m	Cargo, broken stone, and sand.
No. 11	90m	6.9m	Cargo.
No. 12	240m	6.9m	Cargo, broken stone, and sand.
No. 13	50m	2.5m	Small boats.
No. 14	185m	6.9m	Cargo, scrap metal, and sand.
No. 17	33m	2.5m	Small boats.
North Quay			
No. 7	145m	6.9m	Tankers.
No. 9	125m	6.9m	Tankers.
Gropa			
No. 418	50m	6.9m	Tankers.

Regulations.—Vessels in the dredged channel must not exceed a speed of 6 knots when within 2 miles of the harbor entrance.

Prior to departure from the harbor, vessels must confirm that there is not a large inbound vessel in the dredged channel.

Contact Information.—See the table titled **Horsens—Contact Information**.

Horsens—Contact Information	
Port	
VHF	VHF channels 9, 12, 13, and 16
Telephone	45-75-621014
Facsimile	45-75-621457
E-mail	horsens.havn@horsens.dk
Web site	http://www.horsenshavn.dk

8.34 As Hoved (55°45'N., 10°04'E.), a wooded point, projects E from the coast, 3.5 miles S of Hundshage, the S entrance point of Horsens Fjord. Its seaward end is faced by a prominent

low, yellow cliff. The buildings of Palsgard Manor stand about 1.6 miles W of the E extremity of the point and are prominent from seaward.

As Hoved Flak, a coastal shoal bank, extends up to about 0.6 mile E of the seaward end of As Hoved. It has depths of 0.6 to 6m and is marked close E by a buoy.

Lillegrund (55°44'N., 10°08'E.), a small shoal bank, lies centered about 2.1 miles ESE of the E end of As Hoved. It has a least depth of 5.3m and is marked at the SW side by a buoy.

Middelflak, a shoal patch, lies 1.3 mile N of Lillegrund and has a least depth of 4.3m.

As Vig and Sandbjerg Vig, two small bays, lie N and S, respectively, of As Hoved. A prominent church stands near the shore at the SW side of As Vig.

Juelsminde (55°43'N., 10°01'E.), a small harbor and marina, is situated on the S side of Sandbjerg Vig. The main basin has depths of 2 to 5m and can accommodate vessels up to 120m in length, 20m beam, and 4.5m draft. The harbor is used by local ferry vessels and pleasure craft. The Lille Baelt pilot station is situated in the harbor and provides pilots for Horsens Fjord (55°50'N., 10°05'E.) and Vejle Fjord (55°40'N., 9°54'E.).

The conspicuous building of a sanatorium stands near the coast close S of the village of Juelsminde.

Bjornsknude (55°42'N., 10°02'E.), a wooded point, is located 3.5 miles SW of the E end of As Hoved. Bjornsknude Flak, a large shoal flat with depths of 0.9 to 4.3m, fronts the shore N of this point and extends up to about 1.5 miles seaward.

Bjornsknude Rev, a sandy spit, extends about 1.5 miles SE from the point. It has depths of 0.9 to 5m and is marked at the SE extremity by a buoy.

Anchorage.—Vessels may anchor, in depths of 8 to 12m, fine sand, in Sandbjerg Vig and off the N side of Bjornsknude Flak.

Directions.—The approach route leading to Horsens Fjord passes between As Hoved Flak and Lillegrund. It leads NNW and is indicated by a lighted range situated on Hjarne.

Caution.—Marine fish farms may be situated close off the shores of As Vig.

For a description of the waters lying in the approaches to Lille Baelt, W and S of Bjornsknude (55°42'N., 10°02'E.), see Sector 3 of Pub. 194, Sailing Directions (Enroute) Baltic Sea (Southern Part).

8.35 Samso (55°52'N., 10°38'E.), a large island, is generally hilly and almost devoid of woods except for a small area located near its SE corner. Its S coast is low. The island consists of two distinct parts. Nordby Land, a peninsula, forms the N and smaller part. It is connected to the larger S part by Nordby Hede (55°55'N., 10°37'E.), a narrow isthmus.

A number of small and shallow harbors are situated along the shores of the island and are used only by small craft, pleasure boats, local passenger ferries, and fishing vessels. These harbors include Langor Havn (55°55'N., 10°38'E.) and Ballen

Havn (55°49'N., 10°39'E.), on the E side, and Marup Havn (55°56'N., 10°33'E.) and Saelvig Mole (55°52'N., 10°33'E.), on the W side.

Issehoved (56°00'N., 10°34'E.), the N extremity of the island, lies about 6 mile SSE of Sletterhage Light (56°06'N., 10°31'E.) and is a low point. Issehoved Rev, a partly drying reef, extends up to about 0.8 mile N of this point and is marked by a buoy.

Issehoved Flak (56°01'N., 10°34'E.), a coastal bank, extends up to about 1.6 miles NNE of Issehoved. It has depths of less than 5m and is marked close N by a buoy.

Klepperne, a rocky shoal patch, lies on the NE part of Issehoved Flak and about 1.8 miles NE of Issehoved. It has a least depth of 2.2m and is marked close NE by a buoy.

8.36 Samso—West side.—The W coast of Nordby Land, the N part of the island, extends 2 miles SW from Issehoved to Kolsore Hage and then 2.6 miles S to Asmindor Hage. With the exception of Issehoved, this part of the coast is hilly. A prominent lookout tower stands, at an elevation of 64m, on Ballebjerg, 0.6 mile SSE of Kolsore Hage. A conspicuous church, with a red roof, is situated at Norby, about 1 mile NE of Asmindor Hage.

Between Asmindor Hage and Saelvig Mole, 4.3 miles S, the coast recedes to form a bay with general depths of 8 to 13m and low shores. The NE part of this bay is known as Maarup Vig and the SE part is known as Saelvig.

A conspicuous radio mast stands about 0.5 mile SSW of Saelvig Mole. Ringebjerger rises close to the coast and about 0.7 mile SW of Saelvig Mole. It consists of two hills, 25m high.

Ringebjerger Sand (55°52'N., 10°31'E.), an extension of the coastal bank, projects up to about 1.8 miles W and NW from the shore in the vicinity of Saelvig Mole. This bank has depths of 1 to 6m and is marked at the W side by a lighted buoy.

Between Ringebjerger and Vesborg Light, about 5 miles S, the coast consists of a series of bluffs and low shores. Several conspicuous churches stand along this stretch of land.

Dyret, a prominent dome-shaped hill, rises 1.4 miles SSE of Saelvig Mole. It is 51m high and visible from all directions.

Kolby Kaas (55°48'N., 10°32'E.), a small private harbor, lies 1.8 miles NNW of Vesborg Light and is used by an automobile ferry. A conspicuous white church, with a red roof, stands about 1 mile ENE of the harbor and a prominent windmill is situated 0.5 mile W of it.

Tides—Currents.—The tidal range is about 0.6m.

Depths—Limitations.—The entrance, which is protected by two breakwaters, faces WNW and has a controlling depth of 5.2m. The entrance channel is indicated by a lighted range. The two harbor basins have depths of 2.5 to 5.2m alongside.

Kolby Kaas—Berth Information

Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
Ferry Harbor					
No. 1	63m	5.2m	—	4.5m	Ro-pax and bunkers.

Kolby Kaas—Berth Information

Berth	Length	Depth	Maximum Vessel		Remarks
			LOA	Draft	
No. 2	80m	5.2m	90m	4.5m	General cargo and bunkers.

The port can accommodate vessels up to 90m in length and 4.5m in draft. For berthing information see the table titled **Kolby Kaas—Berth Information**.

Vesborg Light (55°46'N., 10°33'E.) is shown from a prominent tower, 19m high, standing on the SW extremity of Samsø.



Vesborg Light

Caution.—A restricted area, which may best be seen on the chart, extends seaward for about 0.6 mile in the vicinity of Vesborg Light. Anchoring, fishing, or other seabed activities are prohibited in this area due to the existence of bottom mines.

8.37 Samsø—East side.—The coast between Issehoved and the town of Nordby, about 2 miles S, is high. It then decreases in height for 2.5 miles toward Nordby Hede, the isthmus. Bylykke Skaar, a conspicuous cleft in the coast, is located 1.6 miles S of Issehoved.

Nordby Bugt (55°57'N., 10°37'E.), a bay, lies between Issehoved and the shoal areas extending N and NE from the entrance to Stavns Fjord. It is reported that a mooring buoy, used by fishing vessels, is located within this bay.

Stavns Fjord (55°54'N., 10°39'E.) is entered about 5.5 miles SE of Issehoved and extends 3 miles S. It is obstructed by numerous islets, rocks, and shoals. This fjord, which may best be seen on the chart, is mostly very shallow and has no commercial significance.

Besser Rev (55°54'N., 10°41'E.), a very narrow spit, extends 2.5 miles N and forms the E side of the fjord. The entrance lies between Havnehage, the N extremity of this spit, and Lilleore, 0.8 mile W. A shoal bank, with depths of 0.6 to 3m, extends up to about 1 mile N of the entrance and is marked on the N side by a buoy. A buoyed channel, with a controlling depth of 3.5m, leads into the fjord through the W side of the shoal bank.

The coastal bank, with depths of 1 to 5m, fronts the E side of

Besser Rev and extends up to about 1 mile seaward in places.

Lindholm Flak (55°56'N., 10°42'E.), a large rocky shoal flat, lies centered 1.2 miles ENE of Havnehage, the N extremity of Besser Rev. It has depths of 1 to 4m and is marked by buoys. Kyholm, located 0.5 mile N of Havnehage, and Lindholm, located 0.7 mile ENE of Havnehage, are two islets which lie on this shoal flat.

Lindholm Sund (55°55'N., 10°41'E.), a narrow channel, leads in a NW direction between Havnehage and the adjacent coastal bank, on the S side, and the SW side of Lindholm Flak, on the N side. It is marked by buoys and has depths of 4 to 11m. The N end of this channel is known as Kyholm Lob and the S end is known as Lindholm Lob. Local knowledge is required.

Between Havnehage, the N extremity of Besser Rev, and Lushage Light, 9.5 miles SSW, the coast is low except at two places. Staalhoj Hage, 20m high, is a point located about 4 miles S of Havnehage and Vorres Hage, 17m high, is a point located 1.3 miles N of Lushage Light.

A conspicuous church stands at Besser, about 2 miles SW of Staalhoj Hage, and a prominent windmill is situated at Kolhoj, 2.4 miles NNW of Vorres Hage.

Caution.—Lindholm Sund and Stavns Fjord lie within a designated nature reserve area and entry is subject to numerous special regulations and restrictions.

A wreck, with a depth of 14.4m, lies about 2.5 miles E of Lushage Light.

8.38 Samsø—South side.—**Lushage Light** (55°46'N., 10°37'E.) is shown from a framework mast, 7m high, standing on Lushage, the SE extremity of Samsø.

The S end of Samsø between Lushage Light and Vesborg Light, 2.4 miles W, is generally low and has two yellow cliffs in its middle part. A conspicuous house stands at Brattingsborg, about 1.6 miles NW of Lushage Light.

Paludans Flak (55°44'N., 10°34'E.), a large shoal area, lies centered about 2.5 miles S of Vesborg Light. It has depths of 4.1 to 9.7m and is marked by a lighted buoy. A narrow channel leads between the N side of this shoal area and the coastal bank fronting the S side of Samsø.

A number of detached shoal patches lie between the S coast of Samsø and Fyns Hoved (55°37'N., 10°35'E.), about 8.5 miles S. They have depths of 5.6 to 9.5m and may best be seen on the chart.

Directions.—A new Deep Water Route, situated about 6 miles S of Lushage Light, leads W and SW through the dangers and into the approach to Lille Baelt. The fairway channel is marked by buoys and has a least depth of 15.7m.

Caution.—A wind farm area, in which 10 prominent wind generators stand, is located off the S side of Samsø, about 2.7 miles SSW of Lushage Light.

For information concerning the waters lying S and E of Lushage Light, see Sector 2 of Pub. 194, Sailing Directions

(Enroute) Baltic Sea (Southern Part).

8.39 Samso Baelt (55°54'N., 10°51'E.) is the area forming the N approach to the Store Baelt. It is bordered on the W side by the shoal banks fronting the E side of Samso and on the E side by the waters lying between Sjaellands Rev Light (56°05'N., 11°13'E.) and Rosnaes Light (55°45'N., 10°52'E.).

Samso E Flak (55°57'N., 10°50'E.) is the collective name for the group of dangers lying off the E side of Samso.

Vejro (55°57'N., 10°46'E.), 15m high, is a flat bush-covered islet lying on a shoal bank, about 7.5 miles ESE of Issehoved, the N extremity of Samso. This islet, which is marked by a beacon on its N side, has a conspicuous yellow bluff on the S side. Vejro NW Rev, a coastal bank, extends about 0.5 mile W and 0.6 mile NW from the W end of the islet. It has depths of 1 to 6m and is marked by a buoy.

Vejro Flak (55°58'N., 10°46'E.), a large shoal bank with depths of less than 5m, lies centered 1.8 miles NNE of Vejro and is marked by buoys. Flensborg Grund, a shoal patch with a least depth of 2.6m, lies on the NE part of this bank.

Langballe Grund, a detached shoal patch with a least depth of 5.6m, lies about 2.4 miles NW of the W end of Vejro.

Bosserne (55°56'N., 10°47'E.), consisting of two narrow islets, lies 0.7 mile SE of Vejro and on the W part of Bosser Flak, a large, shallow shoal bank.

Vejro Sund (55°56'N., 10°46'E.), a narrow and comparatively-deep passage, leads SSW between the W side of Bosser Flak and Vejro.

Havnsø Havn (55°45'N., 11°19'E.) situated close SE of the ridge which connects Nekselo with Sjaelland, consists of a single basin protected by two breakwaters. The harbor is protected by a W breakwater 220m in length with a triangular head from which a mole extends 190m E. The entrance into the harbor faces N between the spur from the W breakwater and the E breakwater which is 120m in length. Entering the harbor from a position about 2 miles N of the harbor in Nekselo Bugt, the track leads S until a short distance from Havnsø North Mole East Head Light (55°45.3'N., 11°19.5'E.), exhibited from the E end of the N mole. Continuing from a position close N of the entrance, the track leads SE between the mole heads. The depths in this harbor range from 3 to 3.5m. For berthing information see table titled **Havnsø—Berth Information**.

Havnsø—Berth Information		
Berth	Depth	Remarks
Havnsø Ferry Harbor		
Nekleso Ferry	3.0m	Ro-pax.
Sejero Ferry	3.0m	Ro-pax.

Lindholm Dyb (55°56'N., 10°45'E.), the main passage leading through Samso E Flak, has a least depth of 8.4m. It leads NW between the SW side of Vejro and the NE side of Lindholm Flak.

Marthe Flak (56°02'N., 10°52'E.), a large shoal bank, lies centered about 10 miles E of Issehoved, the N extremity of Samso. A rocky patch, with a depth of 8.8m, lies on the N part of this bank and is marked close N by a buoy. A rocky patch, with a depth of 6.2m, lies on the S part of this bank and is

marked close S by a buoy.

8.40 Moselgrund (56°04'N., 10°50'E.), a large shoal bank with several rocky patches, lies about 3 miles N of Marthe Flak and is centered 3.5 miles SSE of Helm Light (56°08'N., 10°49'E.). It has a least depth of 4.2m and is marked close S by a lighted buoy.

Yderflak Light (56°04'N., 11°01'E.) is shown from a prominent tower, 8m high, standing on a shoal of the same name. The shoal has a least depth of 8.3m and is centered 6.5 miles WSW of Sjaellands Rev N Light (56°06'N., 11°12'E.).

Directions.—From a position located E of Yderflak Light, on Route A or Route T, a track leads WSW for about 3 miles and passes SSE of Yderflak Shoal. It then leads in a W direction and passes between the S side of Moselgrund and the N side of Marthe Flak. An alternative track leads SW from Route A. It passes NW of Yderflak Light and then leads W to join the main track. The main track continues W and WNW toward Sletterhage Light (56°06'N., 10°31'E.).

Caution.—A small restricted area lies centered 4.2 miles SSE of Yderflak Light. Another restricted area lies 0.7 mile N of Yderflak Light. It is 1 mile wide and extends W for about 10 miles. Anchoring, fishing, or other seabed activities are prohibited in these areas, which may best be seen on the chart, due to the existence of bottom mines.

A large designated nature reserve area extends about 7 miles seaward from the E side of Samso and covers the greater part of Samso E Rev, including Lindholm Dyb and Vejro Sund. Entry is subject to numerous special regulations and restrictions.

8.41 Hatter Barn (55°53'N., 10°51'E.), a detached shoal bank, lies centered 10.5 miles NE of Lushage Light, and has a least depth of 4.7m. A light is shown from a prominent beacon, 9m high and marked DW6, standing on the NE side of this shoal bank.

Hatter Rev (55°54'N., 10°50'E.), a sandy shoal bank, lies centered 1.3 miles N of Hatter Barn Light and close S of the S end of Bosser Flak. It partly dries in places. A light, equipped with a racon, is shown from a prominent beacon, 9m high and marked DW3, standing at the SE extremity of this shoal bank.

Middelflak (55°56'N., 10°55'E.), a rocky shoal bank, lies centered 2.7 miles NE of Hatter Rev Light and depths of 4.7 to 8m. Munke Grunde, another rocky shoal bank, lies centered about 1 mile N of Middelflak and has a least depth of 4.4m.

No. 16 Lighted Buoy (55°55'N., 10°57'E.), equipped with a racon, is moored about 3.2 miles NE of Hatter Rev Light and marks Route T.

Directions.—From a position located 4.8 miles SSE of Yderflak Light, on Route T, a track leads W for 7 miles and passes N of Middelflak and S of Marthe Flak. It then leads WNW toward Sletterhage Light (56°06'N., 10°31'E.).

Route T divides in the vicinity of No. 16 Lighted Buoy (55°55'N., 10°57'E.). A Traffic Separation Scheme (TSS) leads 7.5 miles SW and passes SE of Hatter Barn. A Deep Water Route leads 5 miles WSW and then 3.5 miles S to No. 20 Lighted Buoy (55°49'N., 10°49'E.). It passes between the S side of Hatter Rev and the N side of Hatter Barn.

From No. 20 Lighted Buoy, Route T continues S for 4.5 miles into the Store Baelt and passes about 1.3 miles W of Rosnaes Puller Light (55°45'N., 10°51'E.).



Lushage Light

For a full description of Route T, see paragraph 7.8.
For information concerning the Store Baelte and the waters

lying S of Rosnaes Puller Light, see Sector 2 of Pub. 194, Sailing Directions (Enroute) Baltic Sea (Southern Part).

Danish

DANISH	English	DANISH	English
A		K	
aa	rivulet	kalv	detached islet
anlaegsbro.....	pier	kanal	canal
B		klev	cliff
baek	brook	klint	cliff, bluff
baelte	band	klit	sand dunes
bake	beacon	knold	knoll, shoal
bakke	hill	knude.....	point
banke	bank	kysten	coast
bjerg.....	mountain	L	
borg.....	castle, fortified place	lang.....	long
bredning.....	wide place in channel	lille	little
bro	pier	lob	channel
brygge.....	quay, wharf	lods.....	pilot
bugt.....	bay, bight	lyd	sound
bundgarn.....	seine net	lys.....	light
by.....	town	M	
D		middelgrund	middle ground
dal, dale	valley, gorge	minde.....	mouth
drag.....	isthmus	molle	mill
dyb.....	deep	munding	outlet
dybde	depth	N	
F		naeb	point
farvand, farvandet.....	fairway	naes	point, cape, peninsula
fjord	fjord	nakke	point, cape, bluff
flak.....	flat	nor	shallow inlet, basin
flogetonde.....	whistle buoy	nord	north
fyr	light	ny.....	new
G		O	
gab	mouth	o.....	island
gammel	old	odde.....	point, peninsula, cape
gittermast.....	framework beacon	ore	shoal, point, peninsula
grat.....	gray	ostersoen	the baltic
gron	green	ostre.....	east
grund	shoal area	P	
H		plade.....	shoal
hage	shoal, spit	pulle.....	shoal
hale	spit, peninsula	pynt	point, peninsula
havn	harbor	R	
hoj.....	hill, point	red	roadstead
holm.....	island	redningstatiøn.....	lifesaving station
hoved	point, headland	rende.....	channel
huk.....	point	rev.....	reef, sand flat
hus	house	revle.....	reef, shoal
hvidt.....	white	rod	red
I		ron	rocky ledge
inder.....	inner		

DANISH	English	DANISH	English
S			
sand	shoal, sand flat, beach	sund	sound
sandhage	shoal	syd	south
skance	fort	T	
skov, skoven	forest	tage	fog
slot	castle	tange	tongue of land
sluse	lock	tarn	tower
snaevrinjen	the narrows	V	
so, soen	lake, lagoon	vest	west
sojord	sand flat	vig	bay, inlet, bight, cove
spids	point	vrag	wreck
steil	steep	Y	
store	big, great	yder	outer
strom	current		

Norwegian

NORWEGIAN	English	NORWEGIAN	English
A			
a, aa	stream, rivulet	flesa	rock (generally above water)
aksel	shoulder of a hill or mountain	flo	flood tide
ankerplass	anchorage	flu, flua	rock (submerged)
as	ridge, hill	forberg	promontory
austre	eastern	fyr	light
B			
bad, bat	boat	fyrskip	light ship
bae	rock (generally submerged)	fyrtarn	light tower
bae i vannflaten	rock, awash at low water	G	
bake	beacon	gamle, gammel	old
bakke	hill	gap, gat	mouth, channel, deep
bekk	stream	gard	farm, village
berg, bierg, bjerg	mount, hill	grund, grunn	shoal
boe	rock (generally submerged)	H	
borg	castle, mansion	hake	strip or hook of low land
boye	buoy	hals	isthmus, neck
brat	rock (usually a group)	halvøy	peninsula
bratt	steep, cliffy, abrupt	hamn	harbor, haven
bre	glacier	haug	hillock, peak, spur
bru	bridge	hav	sea
brygga, brygge	wharf	havet	bay, sound
butkt, bukta,	bay, light, cove	havn	harbor, haven
by	town, village	hei, heia	hill, mountain, peak
D		hode	head
dal	valley	holm	island
djup	deep	horn	hill, peak
dor, dora	door, gate, passage	høy, hogd	hill, hummock
dyb, dyp	deep	huk	point
dykdalb	dolphin	hus	house
dyppgaende	draft of vessel	hvit, hvitt	white
E		I	
ebbe	ebb tide	i land	ashore
egga	headland, hill, peak, ridge	indre, inre, inste	inner
eid	isthmus	innsjø	lake
elv, elva	river	isbre	glacier
F		J	
fall	fall of a rock or cliff	jernbane	railway
fartoy, fartyg	vessel	jokel	glacier
farvann	channel, fairway	K	
favn	fathom	kai	quay
ferje	ferry	kalv	calf, a small rock near a larger one
festning	fort, fortress	kamman	mountain
fiskevaer	fishing station	kampen	peak, hill, mountain
fjaere	ebb tide	kanal	navigation canal
fjell	hill, mountain, rocky bottom	kapp	cape, point
fjellrygg	mountain ridge	kilen	cove, fjord, lake
fjord	firth, arm of the sea	klippe	reef, pinnacle
flak	flat or bank	klumpen	mountain, peak, hill
		knaus	crag, rock
		kreppa, kreppen	narrows
		kyst	coast

NORWEGIAN	English	NORWEGIAN	English
L			
ladested.....	loading place	ros, roys.....	stone heap, rocky ground
lagen.....	stream, lake	ryggen.....	spur, ridge, hill
langgrunn.....	shelving bottom, either from a shoal or the shore, which may be shallow water to be avoided or an anchorage to be used	S	
led, leia.....	channel	salen.....	mountain, peak, gap
lille, litle.....	little	sand.....	shoal
lods, los.....	pilot	sata.....	peak, mountain
lop.....	channel, passage	sjo.....	lake
lykt.....	light	skar.....	rocky outcrop
M		skjaer, skjær.....	rock above water, skerry
merke.....	mark	skjaergard.....	archipelago, skerries
midt, midtre.....	middle	skogen.....	woods
molle.....	mill	skolten.....	peak
mun, munning.....	mouth	skorstein.....	chimney
myr.....	marsh	sletta.....	plain, icefield
N		slua.....	rock
naering.....	high entrance point of a fjord	smal.....	narrow
nakke.....	neck	sore.....	south
nebb.....	peak	steinen.....	island, rock, shoal
nes.....	point, hill, peninsula	stor, store.....	large
nord, nordre.....	north, northern	strand.....	beach
nos.....	peak, mountain	straumen.....	channel, bay, narrows
nut.....	mountain, peak	stretet.....	strait
ny, nytt.....	new	stommen.....	narrows
O		sund.....	channel, cove, sound
o.....	island	syd.....	south
odden.....	point, headland, peninsula	T	
oen.....	island	tangen.....	point, spur, peninsula, spit
os.....	river mouth, outlet	taren.....	rock in water
ost, ostre.....	east, eastern	tind.....	mountain, peak, headland
overettlinjen.....	range line	topp.....	summit
oy, oya.....	island	torrfall, torrflu.....	drying bank, drying rock
oygard, oygruppe.....	archipelago	tuen.....	hill
oyra.....	delta	tunga.....	peak, mountain, hill
P		tuva.....	peak, mountain, hill
pa.....	at, on	U	
pa grunn.....	aground	uklar.....	foul
pigg.....	peak	ur.....	rock falls
pir.....	pier	utlop.....	mouth, outlet
plata.....	plateau	V	
pollen.....	bay, fjord, cove, lake	vaer.....	islands
pynten.....	point, headland	vaet.....	channel
R		vag.....	fjord, cove, bay
rabben.....	mountain, hill, ridge	vagan.....	bay
rak.....	strait	val.....	coast, very shallow cove
rasa.....	marine channel	varde.....	hill, peak
red.....	roadstead	veggen.....	cliff, ridge
renna.....	channel	vest.....	west
rev.....	reef	vik, vika, viki.....	bay, cove, creek, inlet
rod.....	red	vrak.....	wreck
		Y	
		ytre, ytste, yttre.....	outer

Swedish

SWEDISH	English	SWEDISH	English
A			
a, alv, alven	stream, river	fiskegarn	fish trap
ankarplats	anchorage	fiskehamn	fishing harbor
ankarsattning	roadstead, anchorage	fiskelage	fishing village
arna, arne	group of islands or rocks	fiskevatten	fisheries
as	ridge	fjall	mountain, hill
B			
back	brook	fjard, fjarden....	fjord, bay, inlet, lake, sound, channel, strait
backe.....	hill	fjord, fjorden	fjord
badan, bade, baden	reef, rock	flack, flak	flat, shoal
bak	beacon	flat	flat
bank	bank	flod	flood, river
barrskog	coniferous woods	flyg	aeronautical
bassang	basin	flytdocka	floating dock
bat	boat	forbjuden	prohibited
berg, berget.....	mountain, hill	forbjudet område.....	prohibited area
bergspets.....	peak, summit	forhållningsboj	mooring buoy
block	boulders	forstord	destroyed
boj.....	buoy	fortojningsring.....	mooring ring
borg.....	castle, fort	fort	foot
branning.....	rock awash	fråntradante	conspicuous, prominent
branningar	breakers	fyr.....	light
brant.....	steep, precipitous	fyrhus	lighthouse
bredning.....	wide place in river or channel	fyrskipp.....	lightship
bro	bridge	fyr torn	light tower
brottsjo.....	breakers	G	
brygga.....	jetty, wharf	gammal, gamla	old
bukt, bukten	bight, bay	gap	opening, inlet, passage
by	town	gard	farm, country place
D			
dal	valley	gatt.....	opening, entrance
dammar	weirs	grans	boundary, limit
djup, djupet.....	channel, sound	gron	green
djupranna.....	deep channel	grund, grundet	shoal
domkyrk	cathedral	grundklack.....	shoal head
dy	mud	grus	gavel
dykdalb	dolphin	gul	yellow
E			
ebb	ebb	H	
elv	river	hak, hake	hook (of land), pointed shoal
ensamt	isolated rock	hal.....	hole, mouth
enslingje	range line	hals	neck (of land)
F			
fabrik	factory	halvo, halvön.....	peninsula
fabriksskorten.....	chimney	hammar	conspicuous point
famn.....	fathom	hamn.....	anchorage, bay, harbor
farja.....	ferry	handelshamn	commercial harbor
fartprovsbana.....	measured distance	hav	bay, sea, ocean
farvatten, farled	fairway	havsbukt	gulf
fastning	fortress	hog	height, hill
		hogslat	tableland
		hogvatten.....	high water
		hojd	hill
		holm, holme, holmen	island
		hus	house
		hufvud, huvud	cape, head

SWEDISH	English	SWEDISH	English
I			
inlopp.....	entrance	lund	grove
innerst	innermost	lusthus	summerhouse
inre	inner	lysboj.....	light buoy
insegling	entrance	M	
insjo	lake	mad.....	marsh, stretch of water with flat bottom
is	ice	magasin	storehouse, warehouse
issignaler	ice signals	marke.....	mark
J			
jarnvag	railroad	medlerst, mellerst.....	central
K			
kabellangd	cable length	mellan.....	between, middle
kaidam	pier	minerada området.....	mined area
kaj.....	quay, wharf	missvisning	variation
kalv	small islet near a larger one, calf	mol	mill
kanal	canal	molo	mole
kap.....	cape	mudder	mud
karantan	quarantine	muddrad	dredged
kase.....	beacon	mun	mouth
klabbe	bare rocky islet close inshore	mynning	river mouth, estuary
klack	underwater head	N	
klapper	pebbles	nabb.....	nose, point
klint	summit of a steep hill or cliff	nas	cape, point
klippa.....	cliff, rock above water	nedre.....	lower
klippgrund	rock, rocky	nodhamn.....	refuge harbor
klockboj.....	bell buoy	nord, norr.....	north
kobb	islet, rock	nordost.....	northeast
koping.....	market town, district	nordvast, nordvest	northwest
krigshamn	war harbor	norra, nordlig.....	northern
kulle.....	hill	ny.....	new
kummel.....	landmark, cairn	O	
kust	coast	oar, oarna.....	islands
kustvakt	coast guard	o, on.....	island
kvarn.....	mill	ogrupp	island group
kyrka.....	church	oklar	foul
L			
landningstrappa	landing stage	oljecistern.....	oil tank
landtunga	spit of land, neck of land	oljeledning.....	oil pipeline
lasarett	hospital	oljehamn.....	oil harbor
lastageplats	loading place	omrade.....	district, ground
lastbrygga	cargo jetty, pier	oresund.....	the sound
lag	low	orlogsvarv.....	naval shipyard
lage	station, berth	ost, oster	east
lagvatten	low water	ostersjon	the baltic
led	channel	ostra, ostlig.....	eastern
lera.....	clay	overskoljte	submerged
lill, lilla	little	ovre	upper
livraddningsstation	lifesaving station	P	
ljudboj	whistle buoy	pir	pier
ljudpipa.....	whistle	platt	flat
lod.....	lead	plattboj	can buoy
lopp.....	channel	prick	spar buoy
lots.....	pilots	R	
lotsstation	pilot station	raddningsstation	lifesaving station
R			
		radiofyr.....	radiobeacon
		ranna.....	channel
		redd	roadstead

SWEDISH	English	SWEDISH	English
rev	reef, spit, bank	svart	black
rod	red	syd, sodre	south
ros, rose	cairn, heap of stones	sydost	southeast
rott	red	sydvast, sydvest	southwest
S		T	
samhalle	settlement	tavla	board daymark
sand	sand	tidssignal	time signal
sjo	sea	tidvatten	tide
sjogras	seagrass	tidvattensdocka	wet dock
sjomärke	seamark	tippningsplats	spoil ground
sjukhus	hospital	topp	summit
skal	shells	torn	tower
skans	fort, redoubt	torrdocka	drydock
skar	above-water rock, rocky islet	triangelpunkt	triangulation point
skargard	fringing rocks, islets, and shoals	tunga	tongue
skog	woods	U	
skogbevaxt	wooded	udde	cape, point, headland
skorsten	chimney	undervattenskabel	submarine cable
skrent	slope, bluff	undre	lower
skyddsområde	protection area	utkikstorn	lookout tower
slatprick	plain spar buoy	V	
slick	ooze	vagbrytare	breakwater
slip	marine railway	vaderkvarn	windmill
slott	castle	vall	steep coast
sluss	lock	varv	shipyard
sma	small	vast, vest	west
soder, sodre, syd	south	vastra, vastlig	western
sodra, sydlig	southern	vatten	water
spets	point	vattenstandssignalstation	tide signal station
spetsboj	conical buoy	vattentorn	water tower
spir	spire	vik	bay, creek
spirboj	spar buoy	vit	white
stad	town	vrak	wreck
stang	pole, spar	vrakboj	wreck or obstruction buoy
stangda farvatter	closed waters	Y	
stangmark	pole beacon	ytstrom	surface current
sten	stone	yttre, ytter	outer
stor, stora	great or large		
strand	beach		
strom	current		
sund, sundet	sound		

How to use the Index—Gazetteer

Geographic names of navigational features are generally those used by the nation having sovereignty and are listed alphabetically. Diacritical marks, such as accents, cedillas, and circumflexes, which are related to specific letters in certain foreign languages, are not used in the interest of typographical simplicity.

Geographic names or their spellings do not necessarily reflect recognition of the political status of an area by the United States Government. Positions are approximate and are intended merely as locators to facilitate reference to the charts.

To use as a Gazetteer note the position and Sector number of the feature and refer to the Chart Information diagram for the Sector. Plot the approximate position of the feature on this diagram and note the approximate chart number.

To use as an Index of features described in the text note the paragraph number at the right. To locate this feature on the best scale chart use the Gazetteer procedure above.

Index—Gazetteer

	Position			Sec. Para		Position			Sec. Para		
	°	'	''			°	'	''			
A											
AALBORG	57	03 N	09	55 E	8.10	BRISEIS FLAK	56	20 N	11	20 E	7.14
ABELSHOVED	56	06 N	10	15 E	8.27	BROFJORDEN	58	22 N	11	25 E	5.13
ABYFJORDEN	58	23 N	11	24 E	5.12	BROFJORDENS ANGORING LT BY	58	15 N	11	13 E	5.12
ABYFJORDEN	58	59 N	9	42 E	2.14	BRUDAREMOSSEN TOWER	57	42 N	12	04 E	6.10
ALBAEK BUGT	57	35 N	10	33 E	8.2	BULBJERG	57	10 N	9	02 E	7.4
ALBAEK HAVN	57	36 N	10	26 E	8.4	BUNNEFJORDEN	59	49 N	10	44 E	4.25
ALGOFJORDEN	57	55 N	11	40 E	5.17	BUSKARS KNOTE LIGHT	57	38 N	11	41 E	6.6
ANGHOLMEN	57	57 N	11	34 E	5.19	D					
ANHOLT	56	43 N	11	34 E	7.12	DANIA CEMENT WORKS	56	41 N	10	03 E	8.13
ANHOLT HAVN	56	43 N	11	31 E	7.12	DANIA TERMINAL	56	41 N	10	03 E	8.13
ANHOLT LIGHT	56	44 N	11	39 E	7.12	DIGERUDGRUNNEN LIGHT	59	43 N	10	35 E	4.7
ARENDAL	58	28 N	8	46 E	2.3	DJUPSKAR LIGHT	58	38 N	11	12 E	5.6
ARHUS	56	09 N	10	13 E	8.26	DONSO SVARTSKAR LIGHT	57	35 N	11	43 E	6.7
ARHUS BUGT	56	03 N	10	23 E	8.24	DRAMMEN	59	44 N	10	14 E	4.18
AS HOVED	55	45 N	10	04 E	8.34	DRAMSFJORDEN	59	32 N	10	24 E	4.16
ASCHEHOUGS FLAK	55	58 N	10	19 E	8.28	DROBAK	59	40 N	10	38 E	4.23
ASDALSTANGEN	59	05 N	9	38 E	3.8	DVALEGRUNDE	57	13 N	10	39 E	8.7
ASGARDSTRAND	59	21 N	10	28 E	4.12	DYBE RENDE	57	45 N	11	20 E	7.15
ASKEROFJORDEN	58	04 N	11	47 E	5.17	DYNA LIGHT	59	53 N	10	43 E	4.26
ASKHOLMANE LIGHT	59	42 N	10	35 E	4.7	DYNABROTT LIGHT	58	18 N	11	19 E	5.12
ASPEND LIGHT	59	44 N	10	35 E	4.7	DYNGBY HOVED	55	58 N	10	16 E	8.27
ASTOL LIGHT	57	55 N	11	35 E	5.17	DYPESKATEN	58	57 N	10	08 E	3.9
ASVALL	59	02 N	9	44 E	3.4	E					
B											
BALLASTSKJAERA LIGHT	57	58 N	7	41 E	1.8	EASTERN CHANNEL	57	46 N	11	19 E	7.15
BANKERODKOLLEN	59	06 N	10	54 E	4.1	EBELTOFT HAVN	56	12 N	10	40 E	8.23
BASTOY LIGHT	59	23 N	10	32 E	4.5	EBELTOFT LIGHT	56	14 N	10	36 E	8.22
BATFJORDEN	57	14 N	12	06 E	6.17	EBELTOFT VIG	56	10 N	10	36 E	8.22
BENSKAR LIGHT	57	40 N	11	37 E	6.4	EGGSKAR LIGHT	57	57 N	11	31 E	5.17
BERGENESODDEN LIGHT	58	03 N	7	59 E	1.10	ELLE LIGHT	59	38 N	10	38 E	4.6
BJARKESGRUND	56	06 N	10	46 E	8.21	ELLOS	58	11 N	11	28 E	5.19
BJORKAS	59	48 N	10	30 E	4.25	ENDELAVE	55	45 N	10	19 E	8.31
BJORKO	57	44 N	11	41 E	6.4	ENGENE	59	41 N	10	32 E	4.23
BJORNERODPIGGEN	59	01 N	11	25 E	4.1	ENGERSANDBUKTA	59	44 N	10	18 E	4.17
BJORNESKJER LIGHT	59	35 N	10	26 E	4.16	F					
BJORNSKNUDE	55	42 N	10	02 E	8.34	FAERDER LIGHT	59	02 N	10	32 E	4.2
BJOROYA	58	17 N	8	33 E	1.20	FAGERSTRAND	59	44 N	10	35 E	4.24
BLAESTHOLMEN LIGHT	58	03 N	8	01 E	1.10	FALKENBERG	56	53 N	12	28 E	6.22
BLEIKGRUNNEN	58	05 N	8	15 E	1.17	FILTVET LIGHT	59	34 N	10	37 E	4.5
BLINDESK LIGHT	59	37 N	10	25 E	4.16	FJALLBACKA	58	36 N	11	17 E	5.7
BOELS PLADE	56	38 N	10	28 E	8.14	FLADEN	57	10 N	11	45 E	6.18
BONDEN LIGHT	58	31 N	8	59 E	2.5	FLADEN LIGHT	57	13 N	11	50 E	6.18
BONNERUP HAVN	56	32 N	10	43 E	8.17	FLATHOLMEN LIGHT	58	16 N	11	25 E	5.14
BORG HARBOR	59	54 N	10	57 E	4.29	FORNAES	56	26 N	10	58 E	8.18
BORGILEFJORDEN	58	15 N	11	38 E	5.17	FREDERIKSHAVN	57	26 N	10	33 E	8.5
BOSSERNE	55	56 N	10	47 E	8.39	FREDERIKSSUND	55	50 N	12	03 E	7.25
BOTTO LIGHT	57	39 N	11	43 E	6.9	FREDERIKSVAERK	55	58 N	12	01 E	7.24
BOVALLSTRAND	58	29 N	11	20 E	5.11	FREDRIKSTAD	59	12 N	10	57 E	4.33
BRAGERNE	57	10 N	8	56 E	7.4	FULEHUK LIGHT	59	11 N	10	36 E	4.4
BRAMSKAR LIGHT	58	39 N	11	09 E	5.6						
BRANDSJKARFLAK LIGHT	58	18 N	11	19 E	5.12						
BREGEN	58	12 N	8	25 E	1.18						

	Position				Sec. Para		Position				Sec. Para
	°	'	°	'			°	'	°	'	
G											
GALTESUNDET	58	26 N	8	47 E	2.2	HUNDESTED HAVN	55	58 N	11	51 E	7.22
GARNHOLME LIGHT	59	12 N	10	46 E	4.19	HUNNEBOSTRAND	58	26 N	11	18 E	5.11
GASA LIGHT	58	13 N	8	28 E	1.18	HYPPELN	57	46 N	11	36 E	6.3
GASOYA LIGHT	59	51 N	10	35 E	4.8	I					
GASUNGANE LIGHT	59	50 N	10	35 E	4.8	IDEFJORDEN	59	03 N	11	25 E	4.38
GASUNGANE LIGHT	59	11 N	10	52 E	4.31	ILLJERNSFLUA LIGHT	59	51 N	10	38 E	4.8
GAVEN LIGHTHOUSE	58	16 N	11	21 E	5.14	INDRE OSLOFJORDEN	59	36 N	10	37 E	4.22
GAVESKAR LIGHT	57	40 N	11	46 E	6.9	ISEFJORD	55	59 N	11	51 E	7.21
GILBJERG HOVED	56	08 N	12	18 E	7.17	ISLANDSBERG LIGHT	58	12 N	11	24 E	5.14
GILHUSBUKTA	59	45 N	10	16 E	4.17	ISSEHOVED	56	00 N	10	34 E	8.35
GJERRILD LIGHT	56	32 N	10	50 E	8.17	ISSEHOVED FLAK	56	01 N	10	34 E	8.35
GLATVED	56	18 N	10	52 E	8.20	J					
GNIBEN	56	01 N	11	17 E	7.18	JAMMERBUGT	57	12 N	9	10 E	7.5
GOTEBORG	57	42 N	11	57 E	6.11	JELOYA	59	27 N	10	38 E	4.20
GOTHENBURG	57	42 N	11	57 E	6.11	JESSENS GRUND	56	16 N	10	51 E	8.20
GRANERUDSTOA	59	47 N	10	36 E	4.25	JOMFRULAND	58	51 N	9	36 E	2.11
GREBBESTAD	58	41 N	11	16 E	5.7	JORDFALLBUKTA	59	41 N	10	22 E	4.17
GRENAA HAVN	56	25 N	10	56 E	8.19	JUELSMINDE	55	43 N	10	01 E	8.34
GRIMSTAD	58	20 N	8	36 E	1.21	JUSTOYA	58	13 N	8	22 E	1.17
GRISBADARNA	58	54 N	10	57 E	5.3	K					
GRISBADARNA SV LT BUOY	58	54 N	10	49 E	5.3	KALSENAKKE	55	50 N	10	12 E	8.30
GRONNINGEN	58	05 N	8	05 E	1.11	KALVO VIG	56	15 N	10	25 E	8.24
GROSFJORDEN	58	19 N	8	35 E	1.20	KALVOFJORD	58	17 N	11	40 E	5.17
GRUNDSLETTA	58	15 N	8	33 E	1.20	KARVA LIGHT	58	19 N	11	20 E	5.12
GULLAUGBUKTA	59	45 N	10	17 E	4.17	KATTEGAT	57	00 N	11	00 E	7.1
GULLHOLMEN LIGHT	59	26 N	10	34 E	4.5	KIBBLINGARNA	58	55 N	11	05 E	5.4
GULSKAREN LIGHT	58	17 N	11	24 E	5.14	KINN LIGHT	58	06 N	8	02 E	1.11
H											
HADSUND HAVN	56	43 N	10	07 E	8.13	KJERRINGFIJELL	59	02 N	10	12 E	3.1
HAKEFJORDEN	57	58 N	11	44 E	5.17	KLABACK LIGHT	57	09 N	12	06 E	6.18
HALDEN	59	07 N	11	23 E	4.37	KLETTEN	57	57 N	7	12 E	1.5
HALLANDS SVARTSKAR LIGHT	57	22 N	11	51 E	6.12	KLOKKEGRUND	56	08 N	10	44 E	8.20
HALLANDS VADERO LIGHT	56	27 N	12	33 E	6.25	KLOSTEROARNA	58	55 N	11	00 E	5.2
HALLO	58	20 N	11	13 E	5.10	KLOVNINGARNA LIGHT	58	56 N	11	00 E	5.2
HALLSUNDSUDDE	57	21 N	12	00 E	6.13	KNATTEN	58	15 N	8	33 E	1.20
HALMSTAD	56	40 N	12	52 E	6.24	KNUBBEHAUSEN LIGHT	58	49 N	9	29 E	2.11
HALS BARRE LIGHT	56	57 N	10	26 E	8.7	KOLBY KAAS	55	48 N	10	32 E	8.36
HALS HAVN	56	59 N	10	19 E	8.9	KOLJOFJORD	58	14 N	11	35 E	5.17
HALVORSHAVN	59	35 N	10	37 E	4.23	KOSTER	58	54 N	11	01 E	5.2
HAMNESKAR LT	57	54 N	11	28 E	5.17	KOSTER FJORDEN	58	52 N	11	06 E	5.4
HANSTHOLM	57	07 N	8	36 E	7.2	KOSTEROARNE ISLANDS	58	53 N	11	02 E	4.1
HANSTHOLM HAVN	57	08 N	8	36 E	7.3	KRAGESKOV REV	57	33 N	10	28 E	8.4
HASLAUFLU LIGHTED BEACON	59	06 N	11	10 E	4.35	KRAKSUNDSGAP SODRA LIGHT	58	06 N	11	26 E	5.17
HASSENOR	56	08 N	10	43 E	8.20	KRISTIANSAND	58	09 N	8	00 E	1.13
HASTENS GRUND	56	14 N	11	12 E	7.14	KRISTIANSANDS HOYE LAND	58	19 N	7	45 E	1.10
HATTEBERGET LIGHT	57	52 N	11	28 E	5.17	KRISTIANSANDSFJORDEN	58	06 N	8	02 E	1.10
HATTEN LIGHT	58	10 N	11	22 E	5.14	KROKSBERGET LIGHT	59	34 N	10	25 E	4.16
HATTER BARN	55	53 N	10	51 E	8.41	KRONPRINS FREDERIKS BRIDGE	55	51 N	12	02 E	7.24
HATTER REV	55	54 N	10	50 E	8.41	KULLEN LIGHT	56	18 N	12	27 E	6.26
HAVKNUDE FLAK	56	21 N	10	56 E	8.20	KUNGEN	57	27 N	11	50 E	6.12
HAVNSO HAVN	55	45 N	11	19 E	8.39	KUNGSBACKAFJORDEN	57	21 N	12	03 E	6.16
HEROYA	59	08 N	9	39 E	3.6	KUNGSHAMN	58	22 N	11	15 E	5.11
HERTHAS FLAK	57	38 N	10	52 E	7.16	KVASEFJORDEN	58	07 N	8	12 E	1.16
HESNESBREGEN LIGHT	58	18 N	8	40 E	1.22	KVERNBERGET	59	04 N	10	15 E	3.13
HESNESOYA	58	20 N	8	39 E	1.22	KYNBYVAERKETS	55	49 N	11	53 E	7.23
HESSELO	56	12 N	11	43 E	7.13	L					
HILLE	58	00 N	7	22 E	1.5	LAESO	57	17 N	11	00 E	7.9
HIRSHOLMENE	57	29 N	10	38 E	8.4	LAESO NW REV	57	17 N	10	47 E	7.9
HIRTSHALS	57	35 N	9	57 E	7.5	LAESO RENDE	57	17 N	10	42 E	7.16
HIRTSHALS HAVN	57	36 N	9	58 E	7.6	LAESO RENDE LIGHT	57	13 N	10	40 E	7.16
HJ HANSON TERMINAL	56	42 N	10	03 E	8.13	LAESO TRINDEL	57	26 N	11	15 E	7.11
HJELM	56	08 N	10	49 E	8.21	LAHOLMSBUKTEN	56	34 N	12	48 E	6.23
HJELM DYB	56	10 N	10	45 E	8.21	LAKSJERA LIGHT	59	03 N	10	28 E	4.2
HOLBAEK	55	43 N	11	43 E	7.23	LANGARA LIGHT	59	45 N	10	34 E	4.7
HOLLENDERBAEN LIGHT	59	10 N	10	38 E	4.4	LANGEBAENE	57	59 N	7	09 E	1.5
HOLMESTRAND	59	29 N	10	19 E	4.15	LANGEBAT LIGHT	59	41 N	10	36 E	4.7
HOLSKJAER LIGHT	59	02 N	10	16 E	3.13	LANGESUND	59	00 N	9	45 E	3.4
HOMBOROYA	58	15 N	8	31 E	1.20	LANGESUNDSFJORDEN	59	00 N	9	48 E	3.2
HOMBORSUND LIGHT	58	15 N	8	32 E	1.20	LANGOYA	59	30 N	10	23 E	4.14
HOMLUNGEN LIGHT	59	01 N	11	01 E	4.32	LANGOYTANGEN LIGHT	59	00 N	9	45 E	3.2
HONO	57	41 N	11	39 E	6.4	LARVIKSFJORDEN	59	01 N	10	04 E	3.10
HONO HUVUD LIGHT	57	41 N	11	36 E	6.4						
HORSENS	55	52 N	9	52 E	8.33						
HORSENS FJORD	55	50 N	10	05 E	8.32						
HORTEN	59	25 N	0	30 E	4.13						
HOV HAVN	55	55 N	10	15 E	8.30						
HUIKJELA	59	10 N	10	34 E	3.17						

